











Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST Company Name: _____ Co. Account #: _____
below to be filled out by retailer

Mounting Strap	1ea 	Deco nut	2ea 	Mounting Screw	4ea 
Hex nut	2ea 	Wire connectors	2ea 	Green screw	1ea 
Crystal drops B2 x 6pcs 	Crystal drops B3 x 2pcs 	Crystal drops C2 x 2pcs 	Crystal drops: D6 x 1pcs 	Crystal drops are not included in parts bag. They are already installed on the fixture.	

Part Needed	_____	Quantity	_____
Part Needed	_____	Quantity	_____
Reason why	(missing, scratched, broken glass, bent, bad finish)		
Comments	_____		


FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

1. Place the Fabric Shade (A) over the Threaded Socket (D) .
2. Holding the Glass Shade (A), and secure it by threading the Socket Ring (C) onto the Threaded Socket (D) until tight .
3. Install the lighting bulbs in accordance with the fixture's specification .

(DO NOT EXCEED MAXIMUM WATTAGE RATING!)

NOTE: INSTALL THE SHADE ASSEMBLY AFTER THE FIXTURE IS INSTALLED.

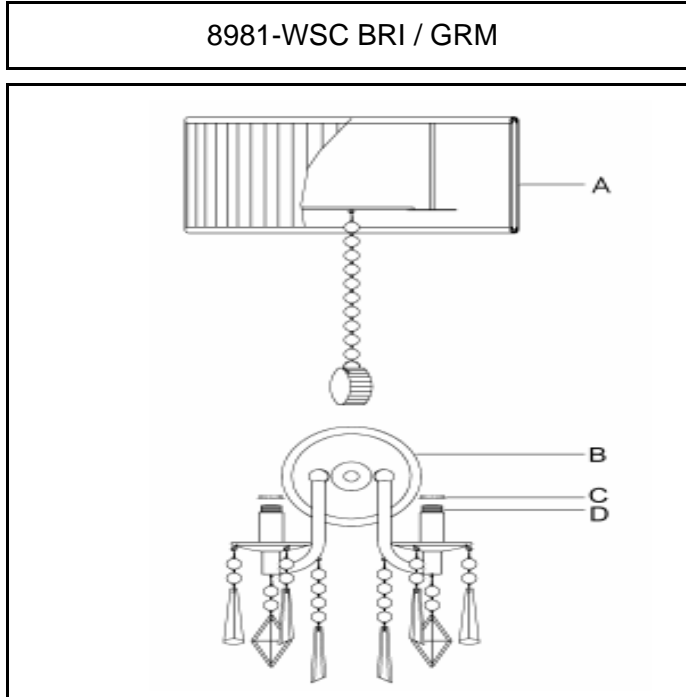

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove old fixture from wall including the old mounting strap.
3. Thread Nipple (H) into Mounting Strap (D) as shown on Fig.1.
4. Place Lock Washer (E) over end of Nipple (H) protruding through Mounting strap (D) and thread Hex Nut (F) onto Nipple (H) until tight as shown on Fig.1.
5. Attach Mounting Strap (D) assembly to the ceiling junction box (A) (not provided) using the two Mounting Screws (G). Tighten screws (G) securely with screw driver.

CONNECTING THE WIRES (Fig 2)

6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
7. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (D) or connect both wires together using the correct size of wire connectors.

NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.

8. Tuck these wire connections neatly into the Junction Box.

FINISHING THE INSTALLATION (Fig.3)

9. Place the fixture Back Plate (J) over the nipple (H) and secure the Back Plate (J) against the wall by threading cap nut (K) until tight as shown on Fig.1
10. Install the Fabric shade and light bulbs as per the fixture assembly sheet.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

