HIGH PERFORMANCE STROLLERS

City Select
Car Seat Adaptor

This Kit Includes:

2 Adaptor Brackets
1 T-Shaped Support Bar
1 U-Shaped Support Bar
1 Straight Support Bar
1 Spring Support Bar

Adaptor Brackets

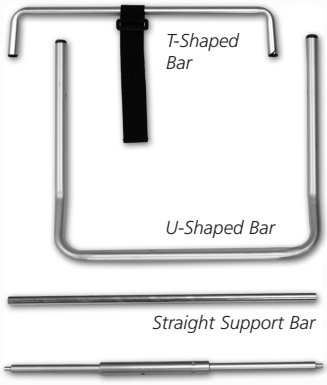

The sample product shown on this manual may differ slightly from your production quality Car Seat Adaptor. However, this will not affect the assembly or functionality of your Baby Jogger product.

The City Select Car Seat Adaptor is designed to be used with the mounting bracket on the side of your Baby Jogger City Select stroller. This car seat adaptor is only compatible with this stroller model.

Before you start, please refer to the chart below to determine which adaptor pieces your car seat requires.

1 Attach the right Adaptor Bracket by sliding it into the right hand mounting bracket until it clicks into place. (Both adaptor pieces and mounting brackets are labeled either with and L or an R for your convenience.)

2 If your car seat adaptor does require the Straight Support Bar, align this bar between the Car Seat Adaptor Brackets before attaching the left side.

If your car seat does not require the Straight Support Bar, please attach the Left Adaptor Bracket by sliding it into the left hand mounting bracket until it clicks into place.

3 Open the compression locks on the Car Seat Adaptor Brackets by flipping the red latches up.

4 Insert the U-Shaped Support Bar with the curved end pointing up or down, depending on what your car seat requires. (See below)

5 If your car seat requires the Spring Support Bar, insert the Spring Support Bar into the front of the U-Shaped Bar by squeezing it in into the open holes.

6 Place your car seat onto the U-Shaped Bar, making sure that the Spring and Support Bars engage the locking mechanisms if/where applicable. Adjust the U-Shaped Support Bar to proper length by sliding the U-Shaped Bar in and out, using the car seat to ensure proper distance.

7 Close compression locks by flipping the red latches down.

8 If applicable, place the T-Shaped Bar onto the car seat and tighten strap using D-Ring and Velcro. (figure A)

9 Secure your car seat onto the stroller using the safety belt on the Car Seat Adaptor Brackets.

figure A

NOTE: Always securely fasten the Bracket Adaptor safety belt over the car seat before operation.

Compatible Car Seat & Usage Guide

Baby Trend Expedition: Uses the 2 Adaptor Brackets and U-Shaped Support Bar (facing up)

Baby Trend StrideZ: Uses the 2 Adaptor Brackets, U-Shaped Support Bar (facing up)

Britax Companion: Uses the 2 Adapter Brackets, the U-Shaped Support Bar (facing up), and the T-Shaped Support Bar

Britax Romer: Uses the 2 Adapter Brackets, the U-Shaped Support Bar (facing up), and the T-Shaped Support Bar

Eddie Bauer Adventurer: Uses the 2 Adapter Brackets, the U-Shaped Support bar (facing up) and the Spring Support Bar

Evenflo Aura Elite: Uses the 2 Adapter Brackets and the U-Shaped Support bar (facing up)

Evenflo Embrace 5: Uses the 2 Adaptor Brackets and U-Shaped Support Bar (facing up)

Graco Infant SafeSeat Step 1: Uses the 2 Adaptor Brackets and the U-Shaped Support Bar (facing up)

Graco SnugRide & SnugRide 2: Uses the 2 Adaptor Brackets and U-Shape Support Bar (facing up)

Maxi Cosi Cabrio: Uses the 2 Adaptor Brackets ONLY

Maxi Cosi Mico: Uses the 2 Adaptor Brackets ONLY

Peg Perego Primo Viaggio SIP: Uses the 2 Adaptor Brackets, U-Shaped Support Bar (facing down), the Spring Support Bar, and the Straight Support Bar

Peg Perego Primo Viaggio SIP 30/30: Uses the 2 Adaptor Brackets, U-Shaped Support Bar (facing down), the Spring Support Bar, and the Straight Support Bar

Safety 1st Designer 22: Uses the 2 Adaptor Brackets, U-Shaped Support Bar (facing up) and the Spring Support Bar

8575 Magellan Parkway, Suite 1000 • Richmond, VA 23227 • T: 800-241-1848 • F: 804-262-6277 • www.babyjogger.com