


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

BG-CFU180

**WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.**

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.**

## Contents of Spare Parts:




Glass Shade  
(1 PC)  
(947918)



Chain  
(1 SET)  
(X-CN1PZ)

## For Semi-Flush

1. Attach two headless screws to the mounting strap, then secure them with four lock nuts (two on each side of the mounting strap). Adjust the length of the headless screws if necessary.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Cut the redundant wires if necessary. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections with wire nuts:
  - The smooth wire (marked) from the fixture to the black wire from the power source.
  - The ridged wire (unmarked) from the fixture to the white wire from power source.
  - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with the wire nut.Carefully tuck the wires back into the outlet box.
4. Unscrew two bolt nuts from fixture canopy. Attach the fixture canopy to the mounting strap by inserting the headless screws, then secure them with the bolt nuts.
5. Screw the stem into the coupling of the socket, then secure it with a washer and hex nut.
6. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
7. Carefully attach the glass shade upward to the pan by inserting the stem, then secure them with a metal pad and hex nut. Attach the cover to the glass shade, secure it with the finial.
8. Turn on the power at the main fuse or circuit breaker box.

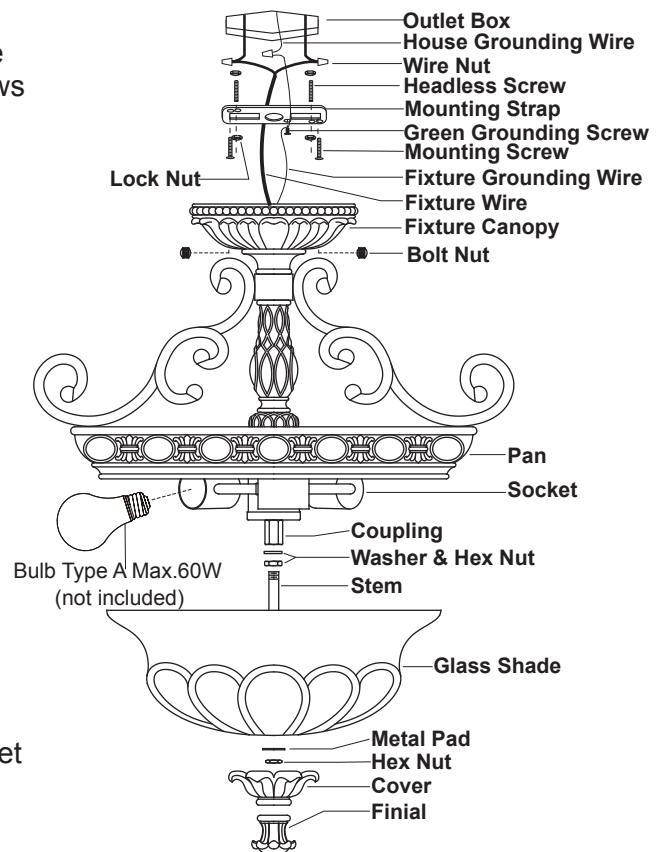

## For Pendant:(See Fig.1)

1. Attach nipple(-a) to the mounting strap, then secure it with a washer and hex nut.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Thread the fixture wire and fixture grounding wire through the loop, then secure the loop onto nipple(-b).
4. Choose the length of the chain you need, then weave the fixture wire and the fixture grounding wire through the chain links. Connect one end of the chain link with the loop by using the loop lock.
5. Secure the top loop to nipple(-a).
6. Thread the fixture wire and fixture grounding wire through the collar, canopy, top loop, nipple(-a) and mounting strap.
7. Connect the other end of the chain link with the top loop by using the loop lock.
8. Follow step 3 as for Semi-Flush.
9. Attach the canopy to the mounting strap by inserting the top loop, then secure it with the collar.
10. Follow steps 5~8 as for Semi-Flush.

