
## ASSEMBLY AND INSTALLATION INSTRUCTIONS

## LK34235/LK34225/LK34285/48813

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK. BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1.Before installing, consult local electrical codes for wiring and grounding requirements.
 2.The combined weight of your ceiling fan and light kit can not exceed 35 pounds unless additional support is provided for the fan.

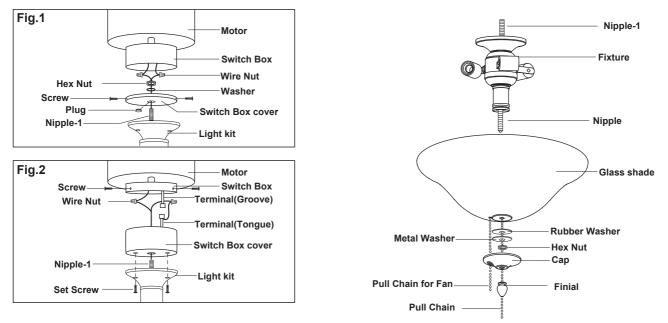

## Installation Steps

- 1. Remove the switch box cover from the fan by loosing 3 screws.
- 2. Unscrew and discard the plug from the switch box cover.
- 3. Attach the light kit to the switch box cover.
  - \*\*\*For fans of the Fig.1, please attach the nipple-1 of the light kit to the hole of the switch box cover, and then thread the wires through the washer and hex nut, and secure tightly.
    \*\*\*For fans of the Fig.2, please attach the nipple-1 of the light kit to the hole in the center
    - of the switch box cover, and then secure with 2 set screws to the switch box cover.
- 4. Make wire connections with the wire nuts:
  - ---Connect black wire from light kit to blue wire from the fan.
  - ---Connect white wire form light kit to white wire from the fan.
  - Carefully tuck wires back into the switch box cover.
- 5. Reinstall the switch box cover with the 3 screws.
- 6. Install bulbs.( Please do not exceed the maximum capacity which is recommended on the package.)
- 7. Thread the pull chain through the glass shade, rubber washer, metal washer and hex nut in order, and secure with the hex nut to the nipple.
- 8. Thread the pull chain through the cap and finial, and secure with the finial to the nipple.
- 9. Thread the pull chain of the fan through the glass shade and the cap.
  - \*\*\* Make sure the hole of glass shade and the hole of the cap for fan was match.
- 10. Turn on the power at fuse or circuit box.

