

# ELEMENTS

Narrow-plank PureForm™ Solid Bamboo Flooring



FINE BAMBOO FLOORING, PANELS & WORKTOPS

From our Builder's Collection - Teragren's best selling narrow-plank profile in our classic PureForm™ bamboo. Designed for use in commercial and residential interiors.



## FEATURES + BENEFITS

### PERFORMANCE

- Durable 7-step UV Cured Polyurethane coating with aluminum oxide wear layer for abrasion resistance
- Premium PureForm bamboo – 40% harder than oak
- Optimum 5.5 Moso Bamboo: Harvested at maturity for peak density, creating a harder and more stable product for lasting beauty and performance
- Approved for installation over radiant heat flooring systems

### VALUE

- Lifetime structural warranty; 10-year heavy-use commercial/25-year residential finish warranties

### ECOSMART

- Certified USDA BioPreferred – 99% biobased content
- FSC-certified material available upon request\*


### INDOOR AIR QUALITY

- Floorscore certified for superior indoor air quality.
- Qualifies for Collaborative for High Performance Schools 2009 Criteria EQ2.2.3 – Low Emitting Materials



## PRODUCT DETAILS

Nominal Dimensions :	<b>36.22" x 3.62" x 0.59"</b> <b>920mm x 92mm x 15mm</b>
Construction:	<b>Solid PureForm™ Traditional Bamboo</b>
Milling:	<b>4 Side Micro-bevel</b>
Profile:	<b>Tongue and Groove</b>
Accessories:	<b>Full line of coordinating 15mm accessories</b>
Color Variation:	<b>Most</b>




## LEED® CREDITS

- IEQ 4.3 Low Emitting Materials
- MR6 Rapidly Renewable Materials
- Certified Wood: MR7 – \*available upon request



Flat Grain  
Natural

Flat Grain  
Caramelized

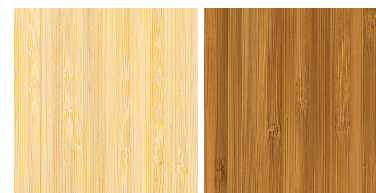

Vertical Grain  
Natural

Vertical Grain  
Caramelized

## INSTALLATION + CARE

Installation Environment:	<b>Nail, Staple and Glue installation into environments having 35-55% RH. Can be installed over radiant heat.</b>
Nail & Staple Installation:	<b>On or Above grade. Use vapor retarder over wood subfloor.</b>
Glue Installation:	<b>On or Above grade. Use a vapor barrier over cement subfloor OR vapor retarder over wood subfloor.</b>
Recommended Adhesive:	<b>Premium Bamboo Flooring Adhesive</b>
Nailing Guidelines:	<b>15-16 gauge cleat or staple 1 1/2"-2"</b>
Acclimation:	<b>Minimum of 48 hours on-site in box</b>
Maintenance:	<b>BonaKemi Pro Series Hardwood Floor Cleaner or equal</b>