

The Kubix™

FP4420 Series




SPECIFICATION SHEET



Product Specifications Subject To Change

The Kubix™ Fan Assembly – FP4420**

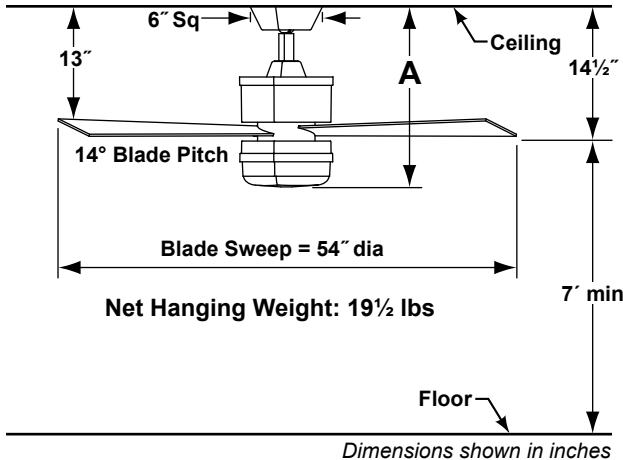

Available Finishes	
OB	Oil-Rubbed Bronze with Opal/Frosted Glass
SN	Satin Nickel with Opal/Frosted Glass



Distance from Ceiling to Bottom of Fan	A
Fan w/6" downrod	19¼"
Fan w/12" downrod	25¼"
Fan w/18" downrod	31¼"
Fan w/24" downrod	37¼"
Fan w/36" downrod	49¼"
Fan w/48" downrod	61¼"
Fan w/60" downrod	73¼"
Fan w/72" downrod	85¼"

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 18 motor is designed for optimal performance with this fan.

FAN SPEEDS:

3 fan speeds with reversing switch (on top of the motor). High – 150 rpm; Med – 110 rpm; Low – 60 rpm

CONTROL OPTIONS:

The hand-held remote control (C24) and canopy receiver (RECFP4420) are included. Push button remote control will consist of 3 separate fan speeds, infinite light levels, and off position. Reversing switch located on fan housing. Installation and operating instructions provided with fan. Optional wall control (C25) is available (to be used in conjunction with fan receiver).

LIGHTING OPTION:

The 2-bulb downlight fixture (2-60 watt candelabra bulbs - not included) is included with this fan assembly with a maximum of 120 watts. Maximum downlight wattage not to exceed 120 watts.

DOWNROD OPTIONS:

The Kubix™ fan comes with a standard 6" downrod with square sleeve included. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Kubix™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call tech support for more information.

BLADE SETS:

A set of 3 reversible (cherry/walnut) wood blades are included. Optional set of 3 Satin Nickel blades (B4400SN) are available and sold separately. Not recommended for Damp Location.

DAMP LOCATION:

Fan not rated for Damp Location usage.



**10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215**

Outside U.S. call (317) 733-4113

Visit Our Website www.fanimation.com

