


# **Enigma<sup>®</sup>**

## **FP2120 Series**




# **SPECIFICATION SHEET**

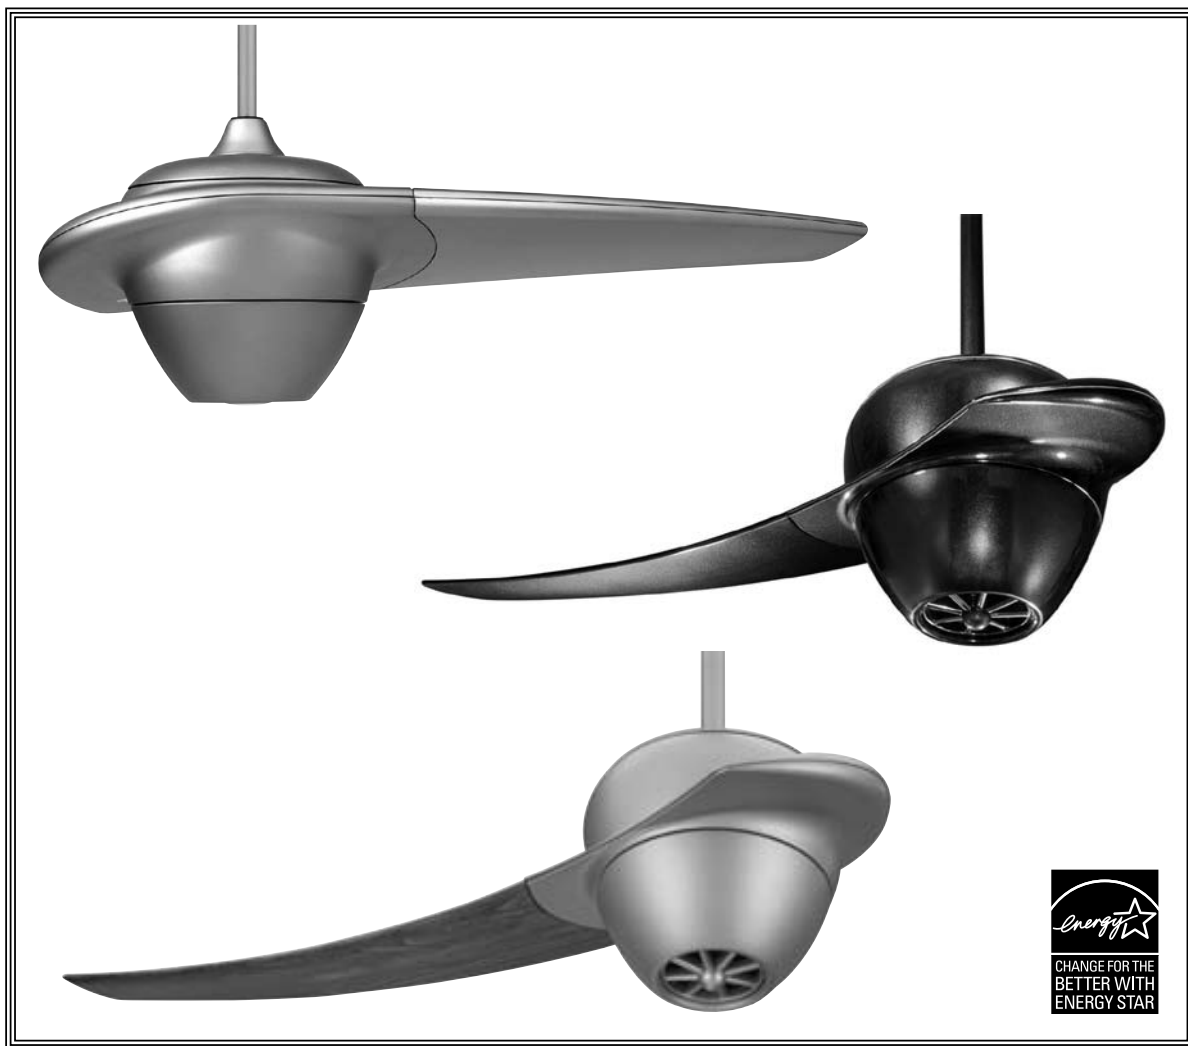

*Product Specifications subject to change*

# Enigma® Fan Assembly – FP2120\*\*

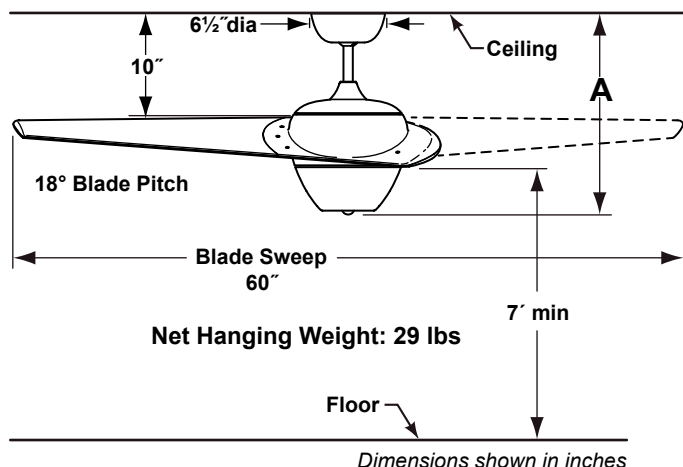

## Available Finishes

MG	Metro Gray
RB	Red-Blue
WA	Metro Gray with Walnut Wood Blade

*\*\*Custom Finishes are available by special order only. Contact tech support for more information*

## Distance from Ceiling to Bottom of Fan

Distance from Ceiling to Bottom of Fan	A
Fan w/6" downrod	18 1/2"
Fan w/12" downrod	24 1/2"
Fan w/18" downrod	30 1/2"
Fan w/24" downrod	36 1/2"
Fan w/36" downrod	48 1/2"
Fan w/48" downrod	60 1/2"
Fan w/60" downrod	72 1/2"
Fan w/72" downrod	84 1/2"

## Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	164	5796	114	0.43	50
Med	99	3208	143	0.34	22
Low	62	1693	156	0.26	11

## INSTALLATION REQUIREMENTS:

Ceiling fan must be secured to a structural member, such as a ceiling joist, capable of withstanding a load of at least 50 lbs. A 3/8" x 5" long lag bolt passes through loop in ceiling support cable, hanger bracket plate, and into wood structural member above.

## ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

## MOTOR SPECS:

188 x 18 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

## CONTROL OPTIONS:

C4T hand-held remote control with canopy-style receiver unit (RECAN34) is included. Push-button remote control has 3 speeds, down light controls and off button. Optional C1, C2 and C25 wall controls are available—sold separately. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for more information. C4-220 remote included with 220V models; optional C6-220 wall control is available. Instructions are provided with each control.

## LIGHTING OPTION:

Single built-in downlight socket uses PAR 30 short-neck, 75 watt max., halogen bulb (not included).

## DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

## \*Minimum Pole Lengths for Sloped Ceilings

Degrees / Pitch	Minimum Pole Length	Blade Tip to Ceiling Dimension
18° / 4 - 12 pitch	12" (DR1-12_)	6 1/2"
27° - 30° / 6 - 12 to 7 - 12	18" (DR1-18_)	4 1/2"

## LOCATION USE:

FP2120MG & FP2120RB are dry and damp location rated  
FP2120WA is dry location rated only



**10983 Bennett Parkway**  
**Zionsville, IN 46077**  
**Toll Free (888) 567-2055**  
**FAX (866) 482-5215**

**Outside U.S. call (317) 733-4113**

**Visit Our Website [www.fanimation.com](http://www.fanimation.com)**

