


The Celano™

FP5420PW



SPECIFICATION SHEET

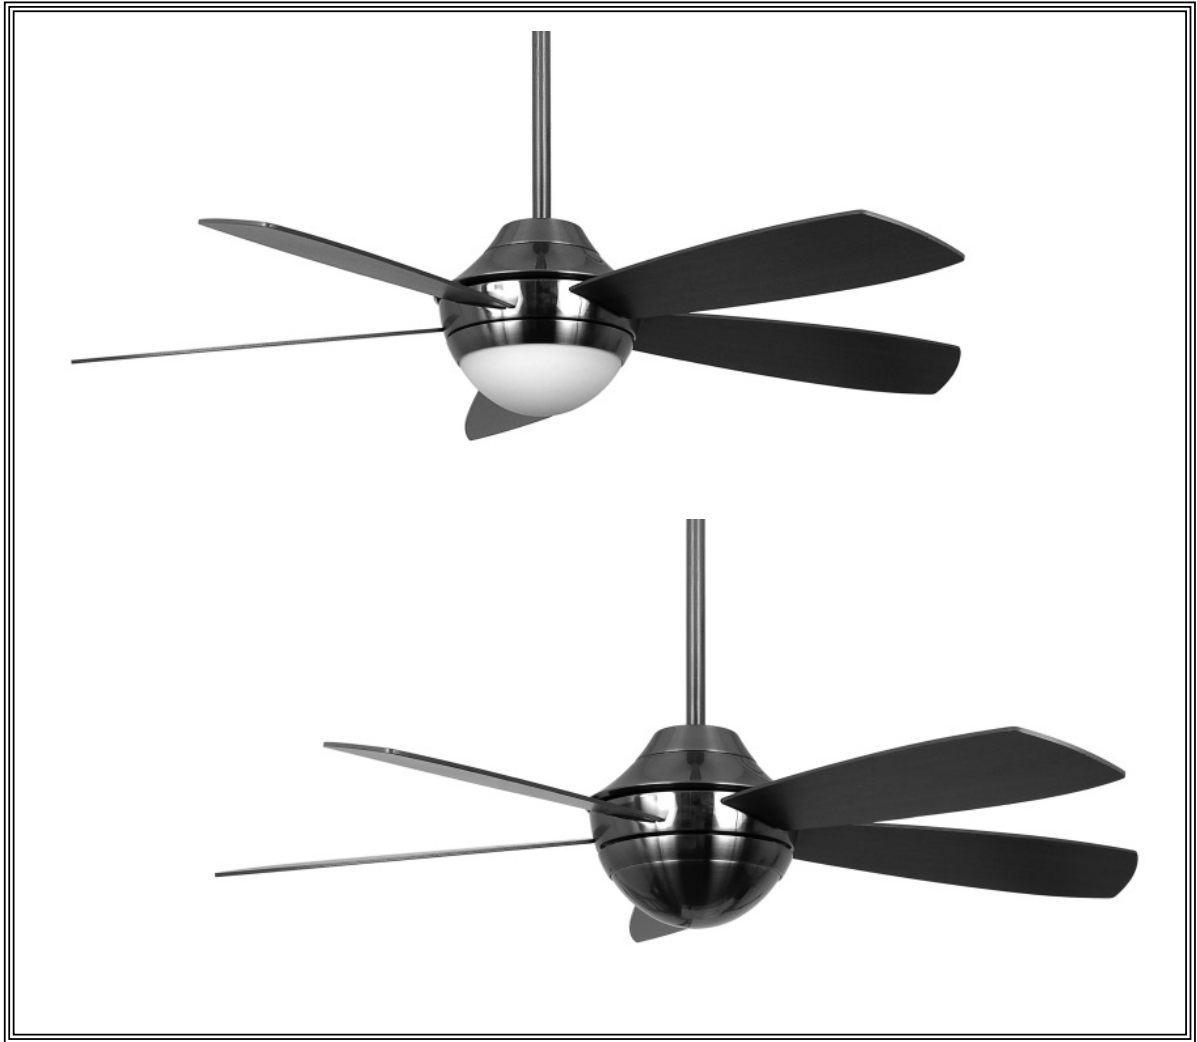

Product Specifications Subject To Change

The Celano™ Fan Assembly – FP5420PW



Fan Assembly - FP5420PW	
Distance from Ceiling to Blade Edge (with 6" DR)	11.6"
Blade Sweep / Pitch	54" / 14°
Canopy Diameter	6½"
Net Hanging Weight: (with Light Kit)	29 lbs

Dimensions shown in inches

Distance from Ceiling to Bottom of Fan	
Fan w/6" downrod	18"
Fan w/12" downrod	24"
Fan w/18" downrod	30"
Fan w/24" downrod	36"
Fan w/36" downrod	48"
Fan w/48" downrod	60"
Fan w/60" downrod	72"
Fan w/72" downrod	84"

	
Optional DR Sleeve	Optional Cherry Blade Set
DRS54PW	B5400CY

Available Finish	
PW	Pewter with Opal/Frosted Glass

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 20 motor is designed for optimal performance with this fan.

FAN SPEEDS:

3 fan speeds with reversing switch (on top of the motor). High – 160 rpm; Med – 108 rpm; Low – 59 rpm

CONTROL OPTIONS:

The hand-held remote control (C24) with canopy receiver (RECFP5420) is included. Push button remote control will consist of 3 separate fan speeds, infinite light levels, and off position. Reversing switch located on fan housing. Optional wall control (C25) is available (to be used in conjunction with fan receiver).

LIGHTING OPTIONS:

The 3-bulb (40 watt max candelabra bulbs - not included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 120 watts.

DOWNROD OPTIONS:

The Celano™ fan comes with a 1" Dia. x 6" (DR1-6) downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. Optional Decorative DR Sleeve (DRS54PW) is available, requires a 18" DR or longer. The Celano™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call tech support for more information.

BLADE SETS:

A set of 5 walnut wood blades are included. Optional set of 5 cherry wood blades (B5400CY) is available and sold separately. Not recommended for Damp Location.

DAMP LOCATION:

Fan not rated for Damp Location usage.



10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website www.fanimation.com

