


The InvolutionTM

FP4520 Series




SPECIFICATION SHEET

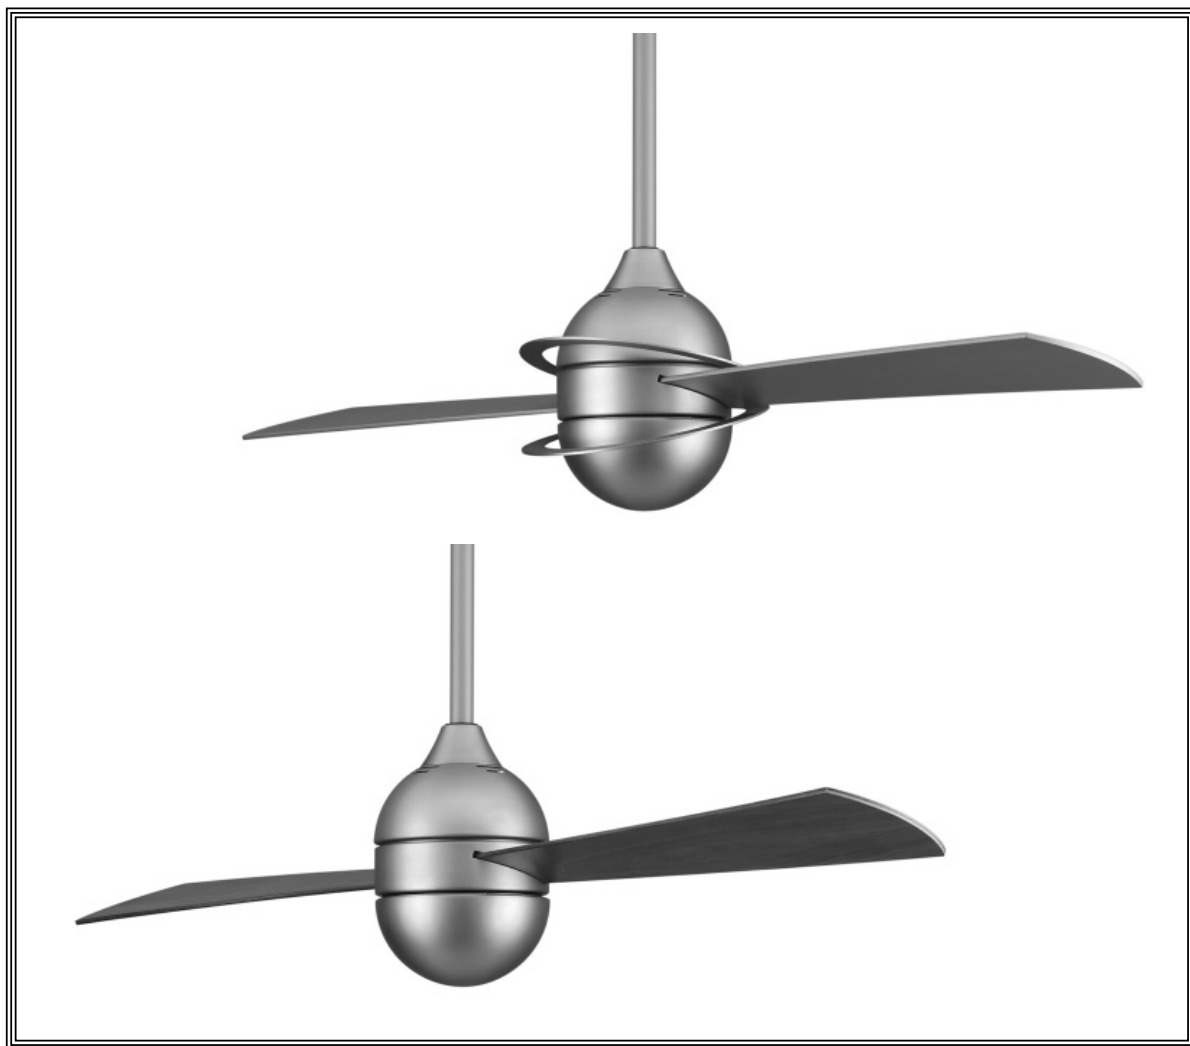

Product Specifications Subject To Change

The Involution™ Fan – FP4520**

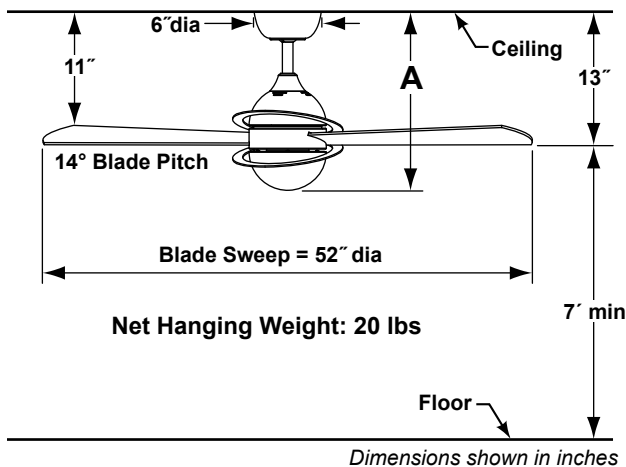

Available Finish	
OB	Oil-Rubbed Bronze
SN	Satin Nickel



Distance from Ceiling to Bottom of Fan	A
Fan w/6" downrod	17"
Fan w/12" downrod	23"
Fan w/18" downrod	29"
Fan w/24" downrod	35"
Fan w/36" downrod	47"
Fan w/48" downrod	59"
Fan w/60" downrod	71"
Fan w/72" downrod	83"

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs. Fan may be assembled without the Decorative Rings for a clean look.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 15 motor is designed for optimal performance with this fan.

FAN SPEEDS:

4 fan speeds with reversing switch (on top of the motor). High – 160 rpm; Med High – 130 rpm; Med – 100 rpm; Low – 60 rpm

CONTROL OPTIONS:

The 4-speed fan-only, wall control (CW40) is included. Reversing switch located inside lower fan housing. Installation and operating instructions provided with control. Optional controls are: C1 and C2 wall controls; C4 remote with receiver.

LIGHTING OPTION – LK4520**:

The optional 1-bulb downlight fixture (13 watt, Energy-Efficient CFL bulb included) is available and sold separately. Maximum downlight wattage not to exceed 13 watts. **NOTE:** Fan supplied with fan-only wall control. Light kit will require an additional control/switch.

DOWNROD OPTIONS:

The Involution™ fan comes with a 1" Dia. x 6" (DR1-6) downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Involution™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Call tech support for more information.

BLADE SETS:

A set of 2 reversible (cherry/walnut) wood blades are included. Optional set of 2 Satin Nickel blades (B4500SN) are available and sold separately. Not recommended for Damp Location.

DAMP LOCATION:

Fan not rated for Damp Location usage.



10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website www.fanimation.com

