
Central Brass_®

The Easy Choice

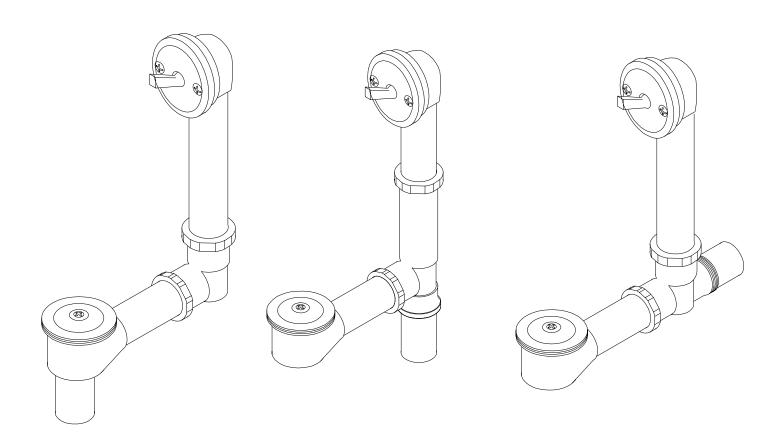

Pop-Up Bath Drain

1674-D Series For 14-inch Tub

1674-LD Series For 14-inch Tub with Lay Down Tee


1676-D Series For 16-inch Tub

1676-LD Series For 16-inch Tub with Lay Down Tee

1675 Series Multi-Tub adjustable for 14 to 16-inch Tubs


CENTRAL BRASS MFG CO

2950 East 55th Street, Cleveland, Ohio 44127

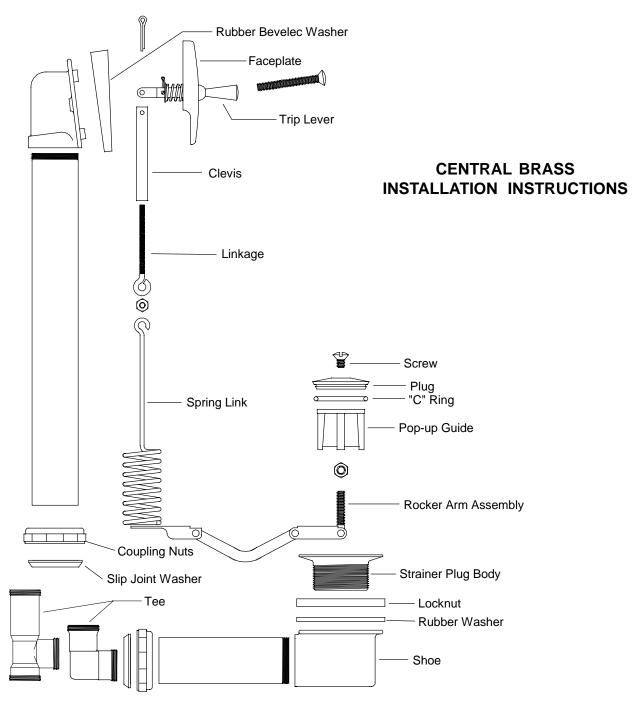


- **1.** Apply a layer of soft putty (plumbers set), to underside of strainer plug body, assemble in bathtub drain hole and screw tightly into shoe elbow as shown.
- **2.** Assemble tubes with slip joint washers into tee as shown and screw on coupling nuts finger tight. Rotate rubber beveled washer on top ell to match angle of tub.
- 3. With the trip handle in the down position, insert the spring and linkage down through the top elbow as shown. Linkage can be screwed in and out of clevis to obtain the desired travel of the spring link. When the proper travel is adjusted, tighten linkage locknut to lock linkage in place. Screw in the two screws to hold face plate.
- **4.** Tighten coupling nuts on tee with wrench to pull tapered slip joint washers securely into tee.
- **5.** Assembly of a threaded tailpiece requires the use of a thread sealant to prevent leakage.


2950 East 55th Street, Cleveland, Ohio 44127

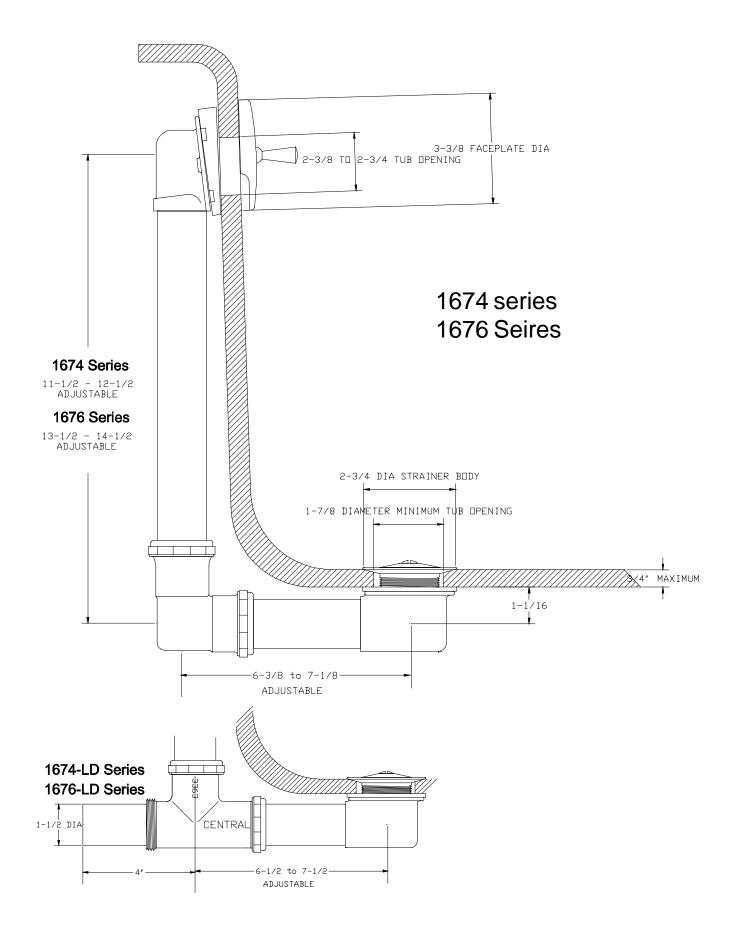

2950 East 55th Street, Cleveland, Ohio 44127

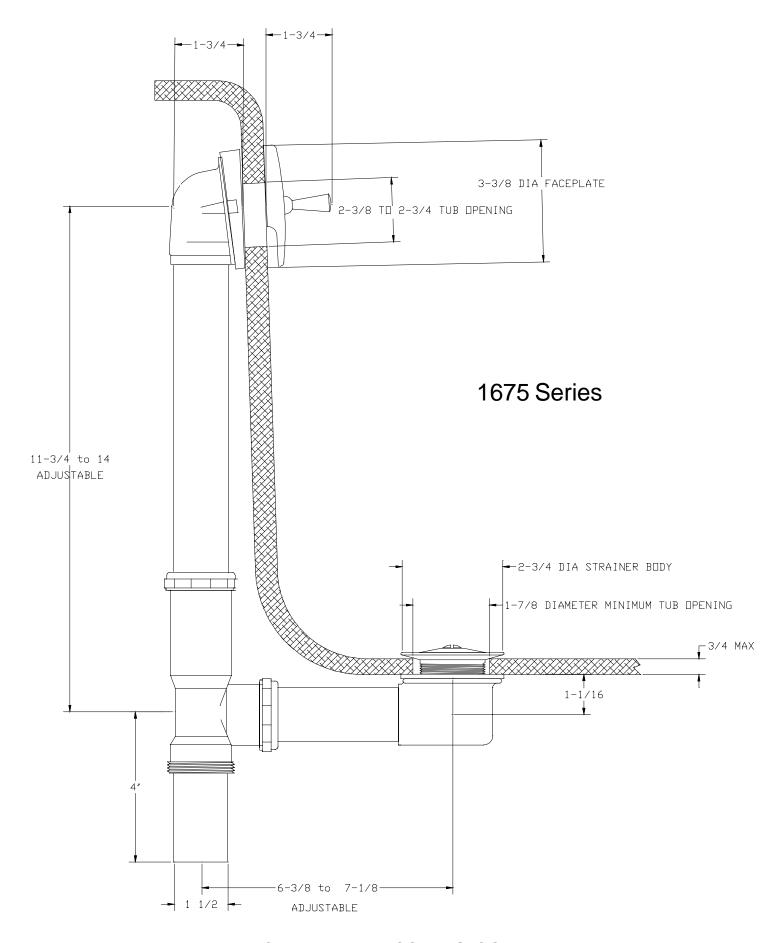

2950 East 55th Street, Cleveland, Ohio 44127

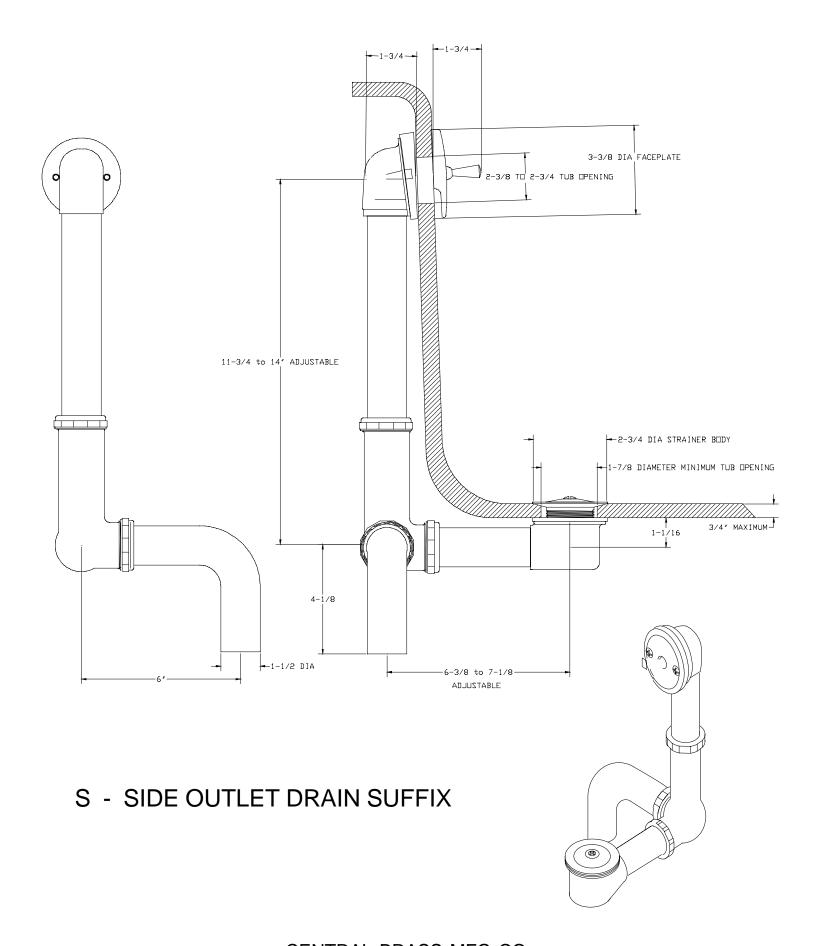

2950 East 55th Street, Cleveland, Ohio 44127