

zentrum

B.lux

powered by



Global Lighting




Discreet design meets dynamic functionality in a surface mounted fixture.

body: matte finished aluminum


diffuser: white polycarbonate

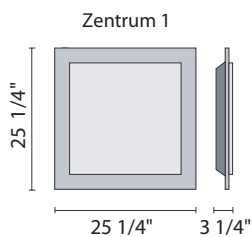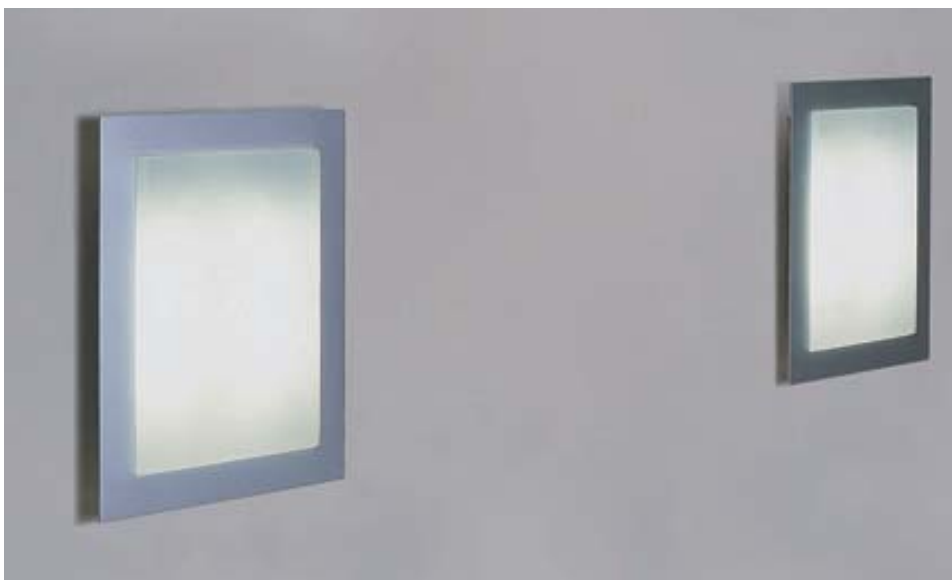


6223 10EU / Non Dim
6223 10DU / Dimming
4 x 36W 2G-11



62232 0EU / Non Dim
3 x 18 W 2G-11
62232 0DU / Dimming
3 x 18 W G24 Q-2



62233 0EU / Non Dim
62233 0DU / Dimming
2 x 36 W 2G-11



62234 0EU / Non Dim
62234 0DU / Dimming
2 x 18W 2G-11

Global Lighting reserves the right to make modifications when necessary
Product Advisory: Standard dimming and non-dimming fixtures are 120V.
Non-dimming and dimming 277V ballasts available upon request.

Global Lighting 50 S Buckhout Street Irvington NY, 10533 ph: 914.591.4095 fax: 914.591.3796 ww w.globallighting.com