REFLEXTM by XYLEM


INSTALLATION INSTRUCTIONS REFLEX GLASS VESSEL SINK (ALL MODELS)

YOUR GLASS VESSEL SINK

All vessel sinks do not have an overflow and may require a specific type of drain such as a pop-up, twist and turn or a grid drain assembly. Please check your local plumbing codes to determine which drain will meet local plumbing code standards for this product.

BEFORE YOU BEGIN

- Observe all local plumbing and building codes.
- Follow these instructions only if it apply to your installation. Vessel sinks allow you to be creative and flexible with your installation.
- Before installation, remove your new glass sink and carefully inspect it for damage. Return the glass sink to its packaging until you are ready to install it.
- These instructions contain important care and cleaning instructions. Please review these instructions carefully.

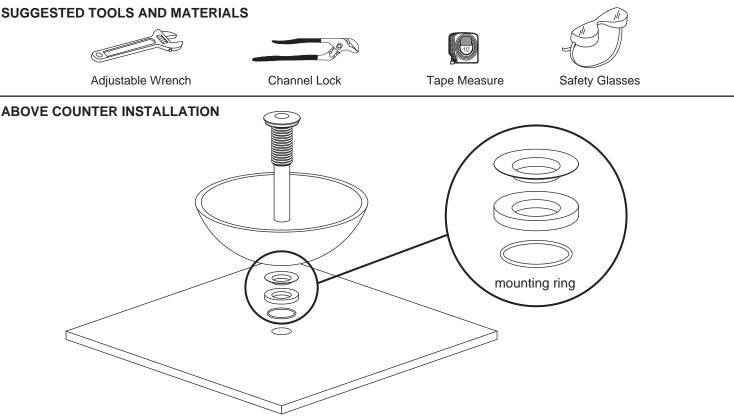

STEP 1:

Cut out a 1 3/4" hole on the counter-top for the drain. Please refer to the cutout template.

STEP 2:

Carefully, position the sink in the cutout opening. If you have mounting ring, place the mounting ring on the counter-top before positioning the sink.

STEP 3:

Use moderate force and hand-tighten the drain kit to the sink, to secure it on the counter-top. It may be necessary to cut part of the tail-piece or part of the horizontal leg in order to make fit to existing plumbing.


CARE INSTRUCTIONS

For best results in caring your glass sink, we suggest:

- Never use strong / abrasive cleaner. Always test your cleaning solution on unnoticeable area before applying to the entire surface.
- Wipe surfaces clean, immediately after applying cleaner.
- Do not allow cleaner to sit or soak. Never let cleaners sit on the surface of the glass.
- Use a soft, dampened sponge and cloth. Never use an abrasive material such as brush or scouring pad to clean surfaces. They will scratch the glass surface.
- Always rinse and wipe clean the fixtures to prevent soap buildup.







ABOVE-THE-COUNTER INSTALLATION

