



D526/D528 SPINNING CANE RACK: ASSEMBLY INSTRUCTIONS

1: PARTS INVENTORY



Round Base



Bolt/Washer




Upper Shaft



Lower Shaft



Header Card Holder



Lower Ring [labeled #1]



Middle Ring [labeled #2]



Top Ring [labeled #3]



2: ASSEMBLY

TOOLS REQUIRED: wrench to tighten bolt

STEP 1:


Insert **Lower Shaft** into **Round Base** and secure with provided bolt/washer from underneath the base.



NOTE! Each ring has a "Through Slot" and a "Half Slot". When Through Slot is aligned with pins, the ring will pass by pin. When Half Slot is aligned with pin, rings will rest on them.

STEP 2:

Place **Upper Shaft** onto **Lower Shaft**.

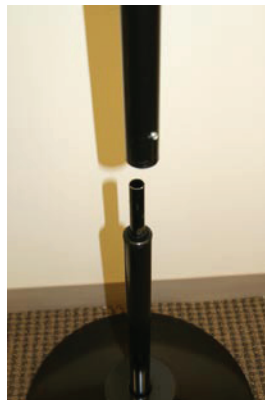

*See above for ring part individual photos

STEP 3: Slide **Lower Ring (#1)** onto **Shaft Assembly**. Pass by Pins 1 and 2, and rest ring on pin #3.

STEP 4: Slide **Middle Ring** onto **Shaft Assembly**. Pass by Pin # 1, and Rest ring on Pin # 2.

STEP 5: Slide **Top Ring (F)** onto **Shaft Assembly**. Rest ring on Peg # 1.



D526/D528 SPINNING CANE RACK: ASSEMBLY INSTRUCTIONS

2: ASSEMBLY CONTINUED

STEP 6:

Insert **Header Card Holder** into the top of **Shaft Assembly** and insert header card into holder.



STEP 7:

Add canes to rack. The bottom of the canes hanging from the **top ring (#3)** should rest outside of **lower ring (#1)**. The bottom of the canes hanging from the **middle ring (#2)** should rest on the inside **lower ring (#1)**.



NOTE: There are 5 additional pegs for hanging accessories such as cane tips and the universal flashlight as shown below.



STEP 8:

Add UPC/Price stickers as shown.

