TECHNICAL DATA SHEET - Threaded Rod Kit



Solid Solutions - Solid Support

MODELS: ACC810 ACC820

Features:

 ACC 810 contains one Threaded Rod Adapter and one 1/2-13 Nylock Nut

 ACC 820 contains four pieces of 1/2" Threaded Rod, two 1/2-13 Nylock Nut and one 1/2-13 Coupling

Dimensions for ACC 810:

Weight: .16 lbs. (.07 kg.)


Shipping weight: .26lbs. (.11 kg)

Shipping Carton dimensions: L=5.38"(137mm) W=3.25"(83mm) H=2.38"(60mm)

<u>Dimensions for ACC 820:</u> Weight: 6.7 lbs. (3.0 kg)

Shipping weight: 7.2 lbs. (3.3 kg.)

Shipping Carton dimensions: H= 36.5"(927mm) D=2.5"(64mm)

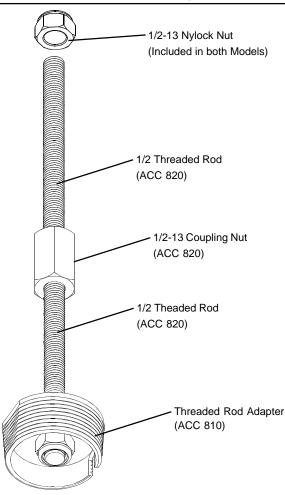

ARCHITECTS SPECIFICATIONS:

The Threaded Rod Adapter shall be a Peerless model ACC 810 and The Threaded Rod Kit shall be a Peerless model ACC 820. They shall be located where indicated on the plans. The Threaded Rod shall be constructed of 1/2" steel rod. The Threaded Rod Adapter shall be constructed of aluminum. The finish for ACC 810 shall be Black Anodize. The finish for ACC 820 shall be Zinc plated. Assembly and installation shall be done according to instructions provided by the manufacturer.