
Designed for hospitality or institutional settings, this two piece VCR mount attaches to the mounting surface with adhesive pads or with mounting hardware. Additional security is provided by a key lock or penta-pin tamper resistant screws.

## Features:

- Heavy gauge cold rolled steel construction.
- Scratch resistant black fused epoxy finish.
- Utilizes tamper resistant screws or key lock.

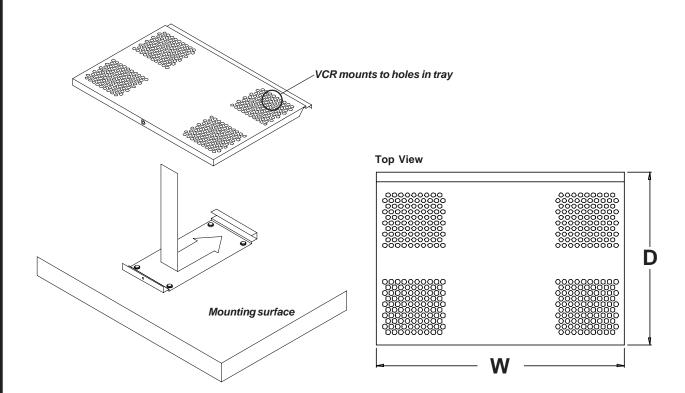

MAX. Load Capacity - 40 lbs. (18 kg.)					
Model	Security	<b>W</b> - width	<b>D</b> - depth	Weight	*Shipping Weight
LDM233K	Key Lock	<b>17"</b> (432mm)	<b>12"</b> (305mm)	<b>8.5 lbs.</b> (3.9 kg.)	<b>10 lbs.</b> (4.5 kg.)
LDM312	Penta-Pin	<b>10.5</b> " (267mm)	<b>11.5</b> " (292mm)	<b>3 lbs.</b> (1.4 kg.)	<b>4 lbs.</b> (1.8 kg.)
*Shipping weight based on single unit shipment. Per unit shipping weight may be less for bulk orders.					

## ARCHITECTS SPECIFICATIONS

The VCR mounting tray shall be a Peerless model **LDM233K or LDM312** VCR Mounting Tray and shall be mounted where indicated on the plans. The mount shall secure a VCR to a surface, and provide tamper resistance via security screws or a key lock. It shall be constructed of heavy gauge cold rolled steel. The finish shall be scratch resistant black fused epoxy. Assembly and installation shall be done according to instructions provided by the manufacturer.



Solid Solutions - Solid Support ™

Peerless Industries, Inc. 3215 W. North Ave. Melrose Park, IL 60160 708-865-8870 800-865-2112 Fax 708-865-2941 www.peerlessindustries.com

TECHNICAL DATA SHEET

**VCR Mounting Tray** 

Sheet No. 124-9505 Issued: 07-28-99 page 1 of 1