

Features

- Brass construction
- Fixture-mount design
- Includes four 1.5 V AA batteries
- Electronic infrared sensor with TriPoint™ technology for accurate activation
- Intended for urinal installations with 3/4" spud coupling connection
- Retrofit model requires a control stop and vacuum breaker
- 0.5 gpf (1.9 lpf) flow rate
- Slow-closing piston technology
- WaterSense® compliant when used with K-4960-ET or K-5016-ET urinals

Codes/Standards Applicable

Specified model meets or exceeds the following:


- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- CSA B64
- CSA B125.3
- ASSE 1037
- FCC 47, Part 15
- EN 55022
- ASME A112.18.1/CSA B125.1
- EPA WaterSense®
- ICES-003 Class B

Specified Model

Model	Description	Colors/Finishes
K-10958	Exposed flushometer – 0.5 gpf (1.9 lpf), washdown with TriPoint™ technology	<input type="checkbox"/> CP
K-10963	Exposed flushometer (retrofit) – 0.5 gpf (1.9 lpf), washdown with TriPoint technology	<input type="checkbox"/> CP

EXPOSED FLUSHOMETER K-10958 ALSO K-10963

ADA CSA B651 OBC

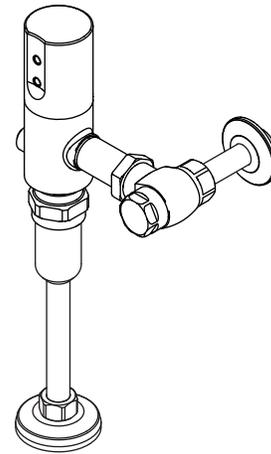

Colors/Finishes

- CP: Polished Chrome

Product Specification

Exposed flushometer shall be made of brass construction. Flushometer shall feature electronic infrared sensor with TriPoint technology for accurate activation. Flushometer shall be of a fixture-mount design. Flushometer is intended for urinal installations with a 3/4" spud coupling connection, and retrofit model requires a control stop and vacuum breaker. Flushometer shall have a 0.5 gpf (1.9 lpf) flow rate and slow-closing piston technology. Flushometer shall be WaterSense compliant when used with K-4960-ET or K-5016-ET urinals. Flushometer includes four 1.5 V AA batteries. Exposed flushometer shall be Kohler Model K-_____-CP.

Technical Information

Recommended operating pressure:
25 psi (172 kPa) flowing - 80 psi (552 kPa) static*
* Pressure over 80 psi (552 kPa) is not recommended on most plumbing fixtures.


Installation Notes

Install this product according to the installation guide.

IMPORTANT! Maintain a 6" (152 mm) minimum critical level above the fixture.

ADA, CSA B651, OBC compliant when installed to the specific requirements of these regulations.

*11-3/8" (289 mm) minimum with a 6" (152 mm) critical level above the fixture

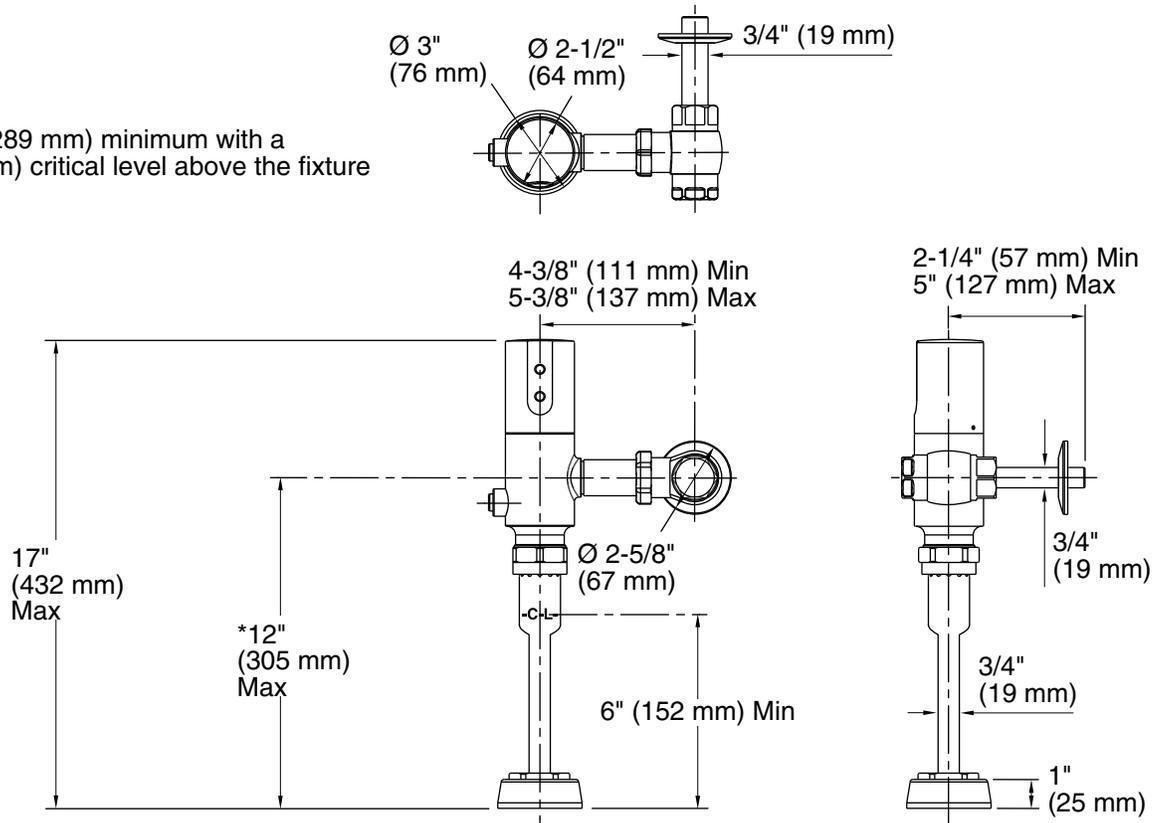

Product Diagram