

Features


- Acrylic
- Blower motor with 300 W heater, and electronic user control
- Left or right drain
- Blower motor is supplied with a grounding-type plug-in cord
- 120 BubbleMassage™ airjets
- Integral tile flange
- Integral apron with removable access panel
- For alcove installation
- Molded lumbar supports
- 60" (1524 mm) x 32" (813 mm) x 20" (508 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- IAPMO IGC 171
- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- ASME A112.19.7

5' BUBBLEMASSAGE™ BATH K-1151-GLA ALSO K-1151-GRA

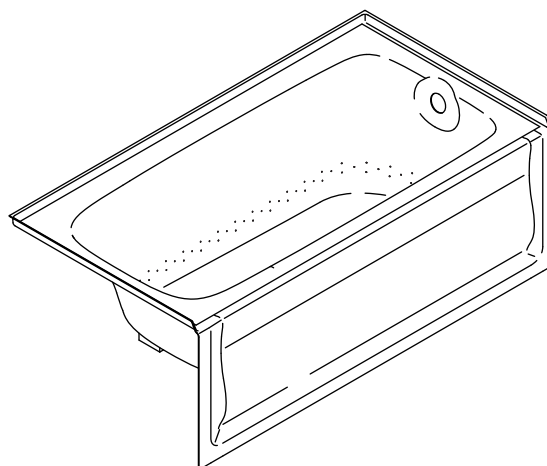

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1151-GLA	5' Bubblemassage bath – integral apron, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1151-GRA	5' Bubblemassage bath – integral apron, right drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories

K-1446	Remote blower installation kit	NA		
K-11677	Swiftflo™ adjustable trip lever drain		<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Optional Accessories

K-9497	2-1/2" (64 mm) metal finish keypad trim	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
--------	---	-----------------------------	-------------------------------------

Product Specification

The acrylic Bubblemassage bath shall be 60" (1524 mm) in length, 32" (813 mm) in width, and 20" (508 mm) in height. Bath shall have an integral apron with removable access panel and integral tile flange. Bath shall be for alcove installations. Bath shall have molded lumbar supports. Bath shall be available with left or right drain. Bath shall have a blower motor with 300 W heater, and an electronic user control. Blower motor shall have a grounding-type plug-in cord. Bath shall have 120 Bubblemassage airjets. Bubblemassage bath shall be Kohler Model K-1151-____-____.

BANCROFT®

Technical Information

Fixture*:				
Bathing well:				
Basin area, bottom	45" (1143 mm) x 22" (559 mm)			
Basin area, top	54" (1372 mm) x 25" (635 mm)			
Weight	100 lbs (45.4 kg)			
To overflow:				
Water depth	15" (381 mm)			
Capacity	60 gal (227.1 L)			
* Approximate measurements for comparison only.				
Blower motor:	Heater	V	Hz	A
	300 W	120	60	5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Blower motor 120 V, 15 A, 60 Hz

Blower motor is supplied with a 24" (610 mm) grounding-type plug-in cord.


Installation Notes

NOTICE: If the blower motor and check valve are relocated, the following two procedures are required: 1. Provide two access panels. Locate one access panel at the blower motor/control location and the other access panel at the control box. **2.** Relocate the blower motor and the check valve together. Do not relocate one without the other.

Install this product according to the installation guide.

Floor support under the bath must provide for a minimum of 49 lbs/square foot (238 kg/square meter) loading.

No change in measurements if connected with drain illustrated. (K-11677)

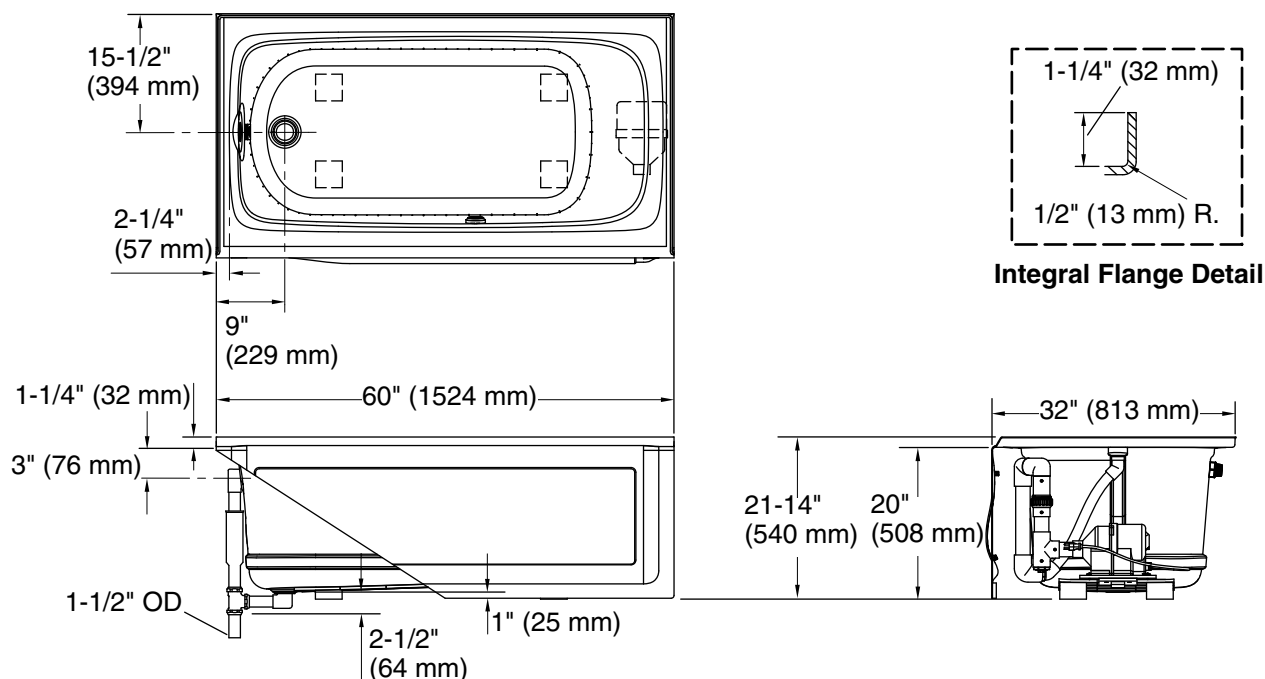

Product Diagram