KOHLER®

PORTRAIT® 5.5’

BUBBLEMASSAGE™ BATH WITH AIRJETS

K-1457-G

ALSO K-1457-GCR

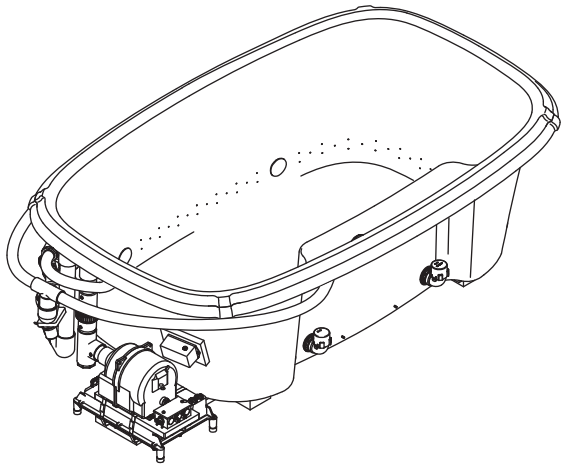

Features

- *Acrylic*
- *122 BubbleMassage™ airjets*
- *Zones of Control™ concentrates massage at back, midsection, or feet*
- *Coordinating Portrait® Suite*
- *Blower motor with 300 W heater and electronic back-lit user control*
- *67″ (1702 mm) x 42″ (1067 mm) x 22″ (559 mm)*

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *CSA B45.5/IAPMO Z124*
- *ASME A112.19.7*
- *CSA B45.10*
- *CSA C22.2 No 218.2*
- *UL 1795*
- *ASTM E162*
- *ASTM E662*

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1457-G	BubbleMassage bath with airjets	❑ 0	❑ Other_____
K-1457-GCR	BubbleMassage bath with airjets and chromatherapy	❑ 0	❑ Other_____

Recommended Accessories			
K-7161-AF	Adjustable pop-up bath drain	❑ CP	❑ Other_____

Optional Accessories				
K-1705	Remote control		❑ NA	
K-9498	3″ (76 mm) metal finish keypad trim	❑ CP		❑ Other_____

Product Specification

The acrylic BubbleMassage bath shall be 67” (1702 mm) in length, 42” (1067 mm) in width, and 22” (559 mm) in height. Bath shall have a blower motor with 300 W heater and electronic back-lit user control. Bath shall have zones of control and 122 BubbleMassage airjets. Bath shall coordinate with Portrait Suite. Bath shall be Kohler Model K-1457-G___-_____.

USA/Canada: 1-800-4KOHLER
(1-800-456-4537)
www.kohler.com

PORTRAIT® 5.5’

Technical Information

Fixture*:	
Basin area:	
Bathing well, bottom	50″ (1270 mm) x 29″ (737 mm)
Bathing well, top	61″ (1549 mm) x 32″ (813 mm)
Weight	128 lbs (58.1 kg)
To overflow:	
Water depth	16″ (406 mm)
Capacity	100 gal (378.5 L)
* Approximate measurements for comparison only.	

Included components:	
Cut-out template	113311-7

Blower motor / control:	kW	V	Hz	A
	300	220-240	50/60	3

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):	
Blower motor/control	220-240 V, 15 A, 50/60 Hz

Installation Notes

The blower motor and piping protrude beyond the rim.

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 51 lbs/square foot (247 kg/square meter).

Hot water supply should be 70% of capacity or greater. Installations will vary.

If installing a rim mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

This bath is designed for drop-in installation only. It is not suited for use in a three wall alcove with an overhead shower.

A blower motor/control access panel is required.

No change in measurements with drain shown. (K-7161-AF or K-7161M-AF)

Recommended faucet area.

K-1457-GCR

Note: The blower and piping protrude beyond the rim.

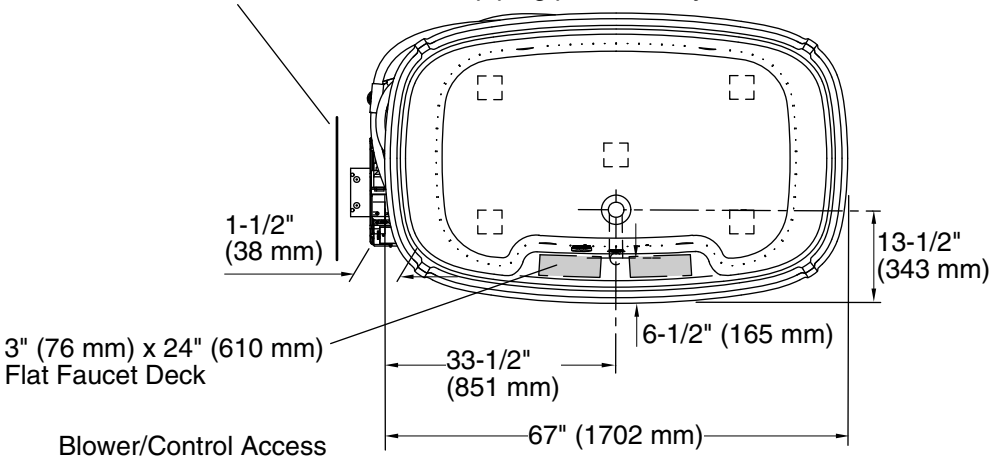

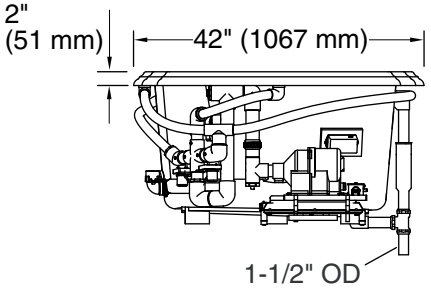

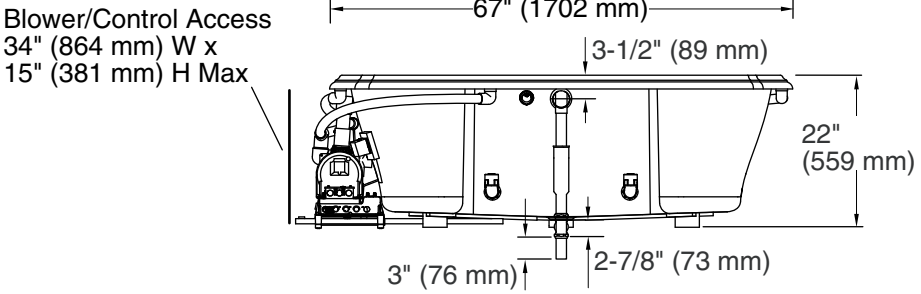

Product Diagram

THE BOLD LOOK OF KOHLER®