


Features

- Acrylic
- 122 BubbleMassage™ airjets
- Zones of Control™ concentrates massage at back, midsection, or feet
- Drop-in
- Blower motor with 300 W heater and electronic back-lit user control
- Available with chromatherapy lights [-GCR]
- Complements the Bancroft Suite
- 66" (1676 mm) x 42" (1067 mm) x 22" (559 mm)

5.5' BUBBLEMASSAGE™ BATH K-1158-G ALSO K-1158-GCR

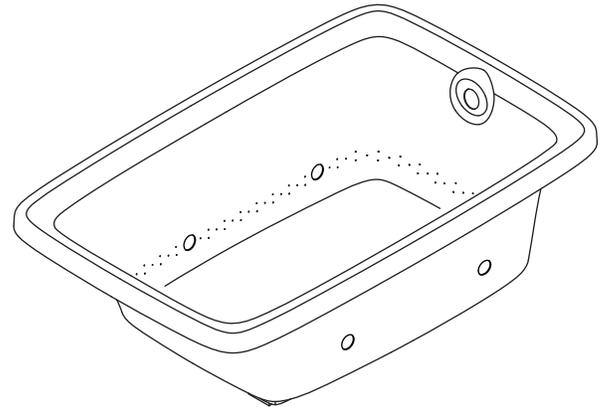

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- UL 1795
- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- ASME A112.19.7

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes	
K-1158-G	5.5' BubbleMassage bath – less chromatherapy	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1158-GCR	5.5' BubbleMassage bath – with chromatherapy (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories

K-7161-AF	Adjustable pop-up drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
-----------	-------------------------	-----------------------------	-----------------------------	-------------------------------------

Optional Accessories

K-1491	Pillow	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
K-1705	Remote control	<input type="checkbox"/> NA		
K-9498	3" (76 mm) whirlpool keypad trim		<input type="checkbox"/> CP <input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Product Specification

The acrylic 5.5' BubbleMassage bath shall be 66" (1676 mm) in length, 42" (1067 mm) in width, and 22" (559 mm) in height. Product shall have a blower motor with 300 W heater and electronic back-lit user control. Product shall be for drop-in installation. Product shall have Zones of Control feature and 122 BubbleMassage airjets. Product shall be available with chromatherapy lights [-GCR]. Product shall complement the Bancroft Suite. Bubblemassage bath shall be Kohler Model K-1158-____-____.

BANCROFT®

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	46" (1168 mm) x 30" (762 mm)
Basin area, top	57" (1448 mm) x 34" (864 mm)
Weight	130 lbs (59 kg)
To overflow:	
Water depth	16" (406 mm)
Capacity	95 gal (359.6 L)
* Approximate measurements for comparison only.	

Included component:	
Cut-out template	1043292-7

Blower motor:	Heater	V	Hz	A
	300 W	220-240	50/60	3

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Blower motor/control	220-240 V, 15 A, 50/60 Hz
----------------------	---------------------------

Installation Notes

Install this product according to the installation guide.


Hot water supply should be 70% of capacity or greater. Installations will vary.

This bath is designed for drop-in installation only. It is not suited for use in a three-wall alcove with an overhead shower.

A blower motor/control access panel is required.

Floor support under the bath must provide for a minimum of 50 lbs/square foot (242 kg/square meter) loading.

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

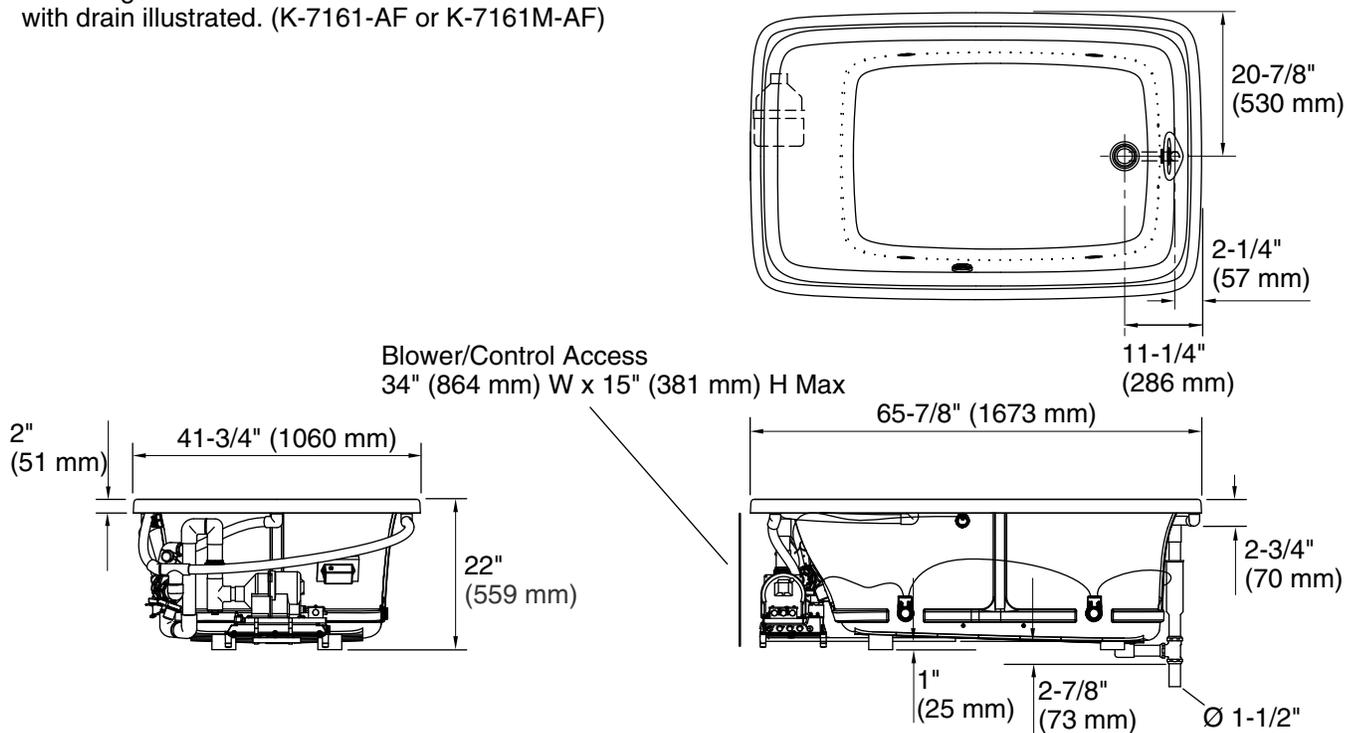

Product Diagram