


### Features

- Acrylic
- Pump with air switch and grounding-type plug-in cord
- 6 individually adjustable ProFlex® hydro-massage jets
- Drop-in
- In-line heater
- Molded lumbar supports and armrests
- Textured bottom surface
- Optional K-9696 whirlpool trim kit in various finishes
- Integral tile flange on both sides for corner installation. [K-1160-FH]
- 60" (1524 mm) x 60" (1524 mm) x 21" (533 mm)

### BATH WHIRLPOOL WITH HEATER K-1160-H ALSO K-1160-FH

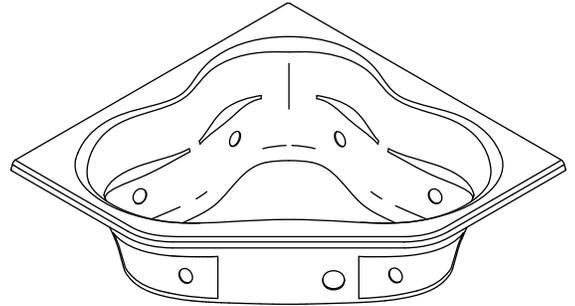

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASME A112.19.7
- UL 1795
- ASTM E162
- ASTM E662

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- 0: White
- CB: Polished Chrome/Polished Brass
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-1160-H	Bath whirlpool – drop-in (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1160-FH	Bath whirlpool – integral tile flange	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
<b>Recommended Accessories</b>			
K-11677	Adjustable trip lever bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB
<b>Optional Accessories</b>			
K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-9696	Jet trim kit (metal finishes)	<input type="checkbox"/> CP	<input type="checkbox"/> PB

### Product Specification

The drop-in acrylic bath whirlpool shall be 60" (1524 mm) in length, 60" (1524 mm) in width, and 21" (533 mm) in height. Product shall have 6 individually adjustable ProFlex hydro-massage jets, a pump with air switch and grounding-type plug-in cord, and an in-line heater. Product shall have a textured bottom surface and molded lumbar supports and armrests. Product shall have integral tile flange on both sides for corner installation [K-1160-FH]. Product shall have an optional K-9696 whirlpool trim kit in various finishes. Bath whirlpool shall be Kohler Model K-1160-H\_\_\_\_\_ or K-1160-FH-\_\_\_\_\_.

# TERCET®

## Technical Information

Fixture*:	
Basin area:	
Bathing well	52" (1321 mm) x 38-3/4" (984 mm)
Top area	61" (1549 mm) x 46-1/4" (1175 mm)
Weight	131 lbs (59.4 kg)
To overflow:	
Water depth	15" (381 mm)
Capacity	96 gal (363.6 L)
* Approximate measurements for comparison only.	

Pump:	V	Hz	A	
1-speed	120	60	7.5	
Heater:	kW	V	Hz	A
	1.5	120	60	12.5

Minimum access panel (required):	20" (508 mm) W x 15" (381 mm) H
----------------------------------	---------------------------------


## Required Electrical Service

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Heater	120 V, 15 A, 60 Hz
Locate the outlets behind the whirlpool and within 24" (610 mm) of the pump and heater.	

## Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 39 lbs/square foot (189 kg/square meter) loading.

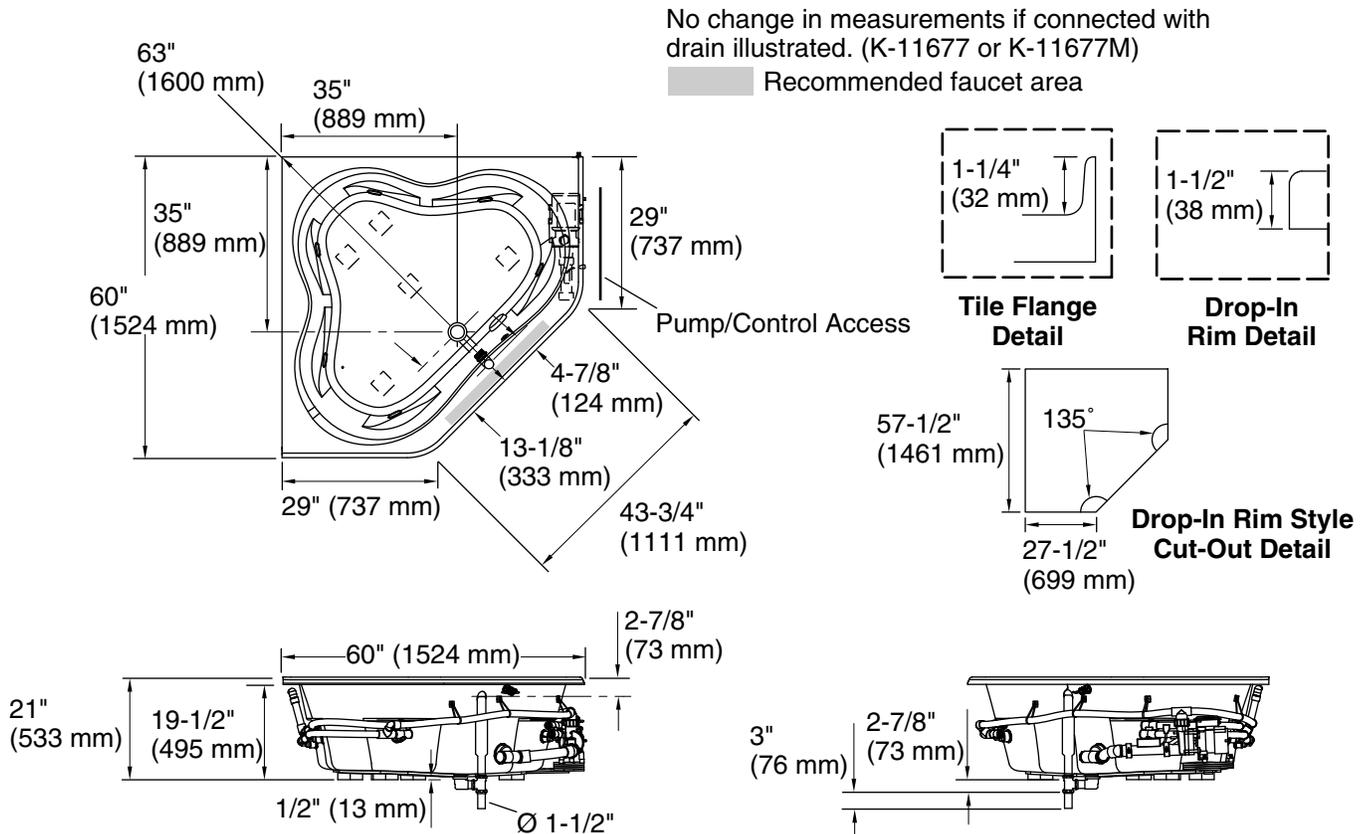

## Product Diagram