


Features

- Cast iron with Safeguard® finish
- Variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control
- 6 Flexjets™
- UL listed
- Less all trim
- Custom pump locations
- 71-3/4" (1822 mm) x 36" (914 mm) x 20-7/8" (530 mm)

6' BATH WHIRLPOOL K-865-HB ALSO K-865-HD, K-865-HM

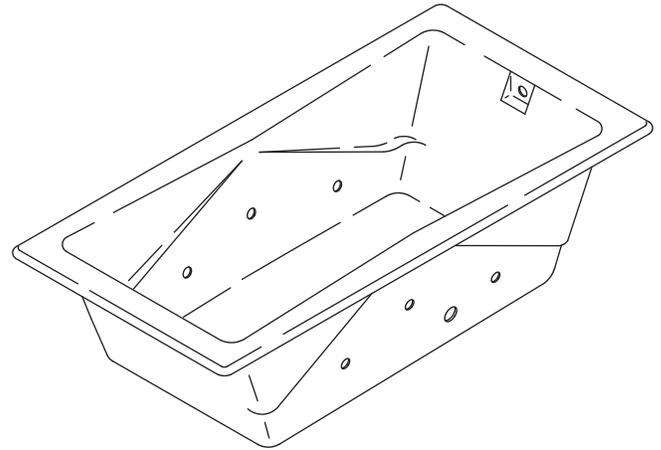

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1/CSA B45.2
- ASME A112.19.7
- CSA B45.10
- CSA C22.2 No 218.2
- UL 1795

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-865-HB	6' bath whirlpool, custom pump	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-865-HD	6' bath whirlpool, custom pump	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-865-HM	6' bath whirlpool, custom pump	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Required Accessories

K-9696	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-7169-AF	Clearflo pop-up bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Optional Accessories

K-582	Undermount installation kit (template and installation instructions)	<input type="checkbox"/> NA
K-1179	Vinyl tiling-in bead (use when wall material contacts any top surface of bath)	<input type="checkbox"/> NA

Product Specification

The bath whirlpool shall be 71-3/4" (1822 mm) in length, 36" (914 mm) in width, and 20-7/8" (530 mm) in height. Bath whirlpool shall be made of cast iron with Safeguard® finish. Bath whirlpool shall have 6 Flexjets, a variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control. Bath whirlpool shall have custom pump locations. Bath whirlpool shall be UL listed and less all trim. Bath whirlpool shall be Kohler Model K-865-_____-_____.

TEA-FOR-TWO®

Technical Information

Fixture*:			
Bathing well:			
Basin area, bottom	49" (1245 mm) x 22" (559 mm)		
Basin area, top	62" (1575 mm) x 28" (711 mm)		
Weight	455 lbs (206.4 kg)		
To overflow:			
Water depth	17" (432 mm)		
Capacity	89 gal (336.9 L)		
* Approximate measurements for comparison only.			
Pump	kW	V	A*
	1.5	240	11
* Approximate measurements for comparison only.			
Drop-in cut-out	70-1/4" (1784 mm) x 34-1/2" (876 mm)		
Included component:			
Cut-out for undermount	K-582 template		

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control	208-240 V, 20 A, 50/60 Hz
--------------	---------------------------

Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 69 lbs/square foot (333 kg/square meter) loading.


Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.

Hot water supply should be 70% of capacity or greater. Installations will vary.

Pump must be relocated to custom position at the time of installation. Provide adequate clearance.

K-865-HB

Pump/Control Access
34" (864 mm) W x 15" (381 mm) H

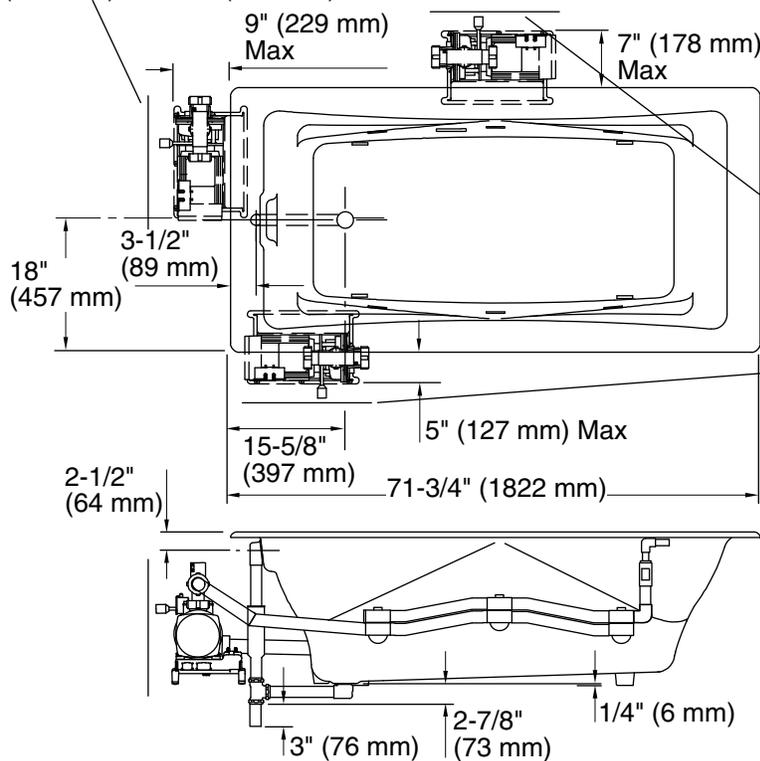


No change in measurements if connected with drain illustrated. (K-7169-AF or K-7169M-AF)

K-865-HD

Pump/Control Access
34" (864 mm) W x 15" (381 mm) H

K-865-HM

Pump/Control Access
34" (864 mm) W x 15" (381 mm) H

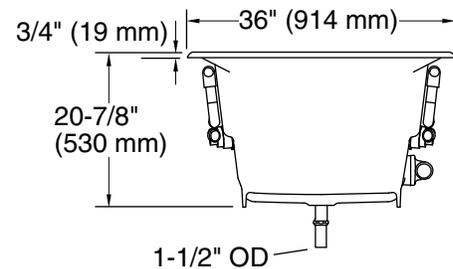

Product Diagram