


Features

- Acrylic
- 6 Flexjets™
- Ten color-matched sequencing Bodyssage™ backjets
- Two pulsating neckjets with pillow
- 8 effervescent ports
- 4 chromatherapy lights
- 240 V, 20 A electrical service
- Drilled for required grab bars
- Variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control
- 67" (1702 mm) x 42" (1067 mm) x 22" (559 mm)

5.5' SPA/MASSAGE EXPERIENCE BATH WHIRLPOOL **K-1457-LV** ALSO K-1457-RV

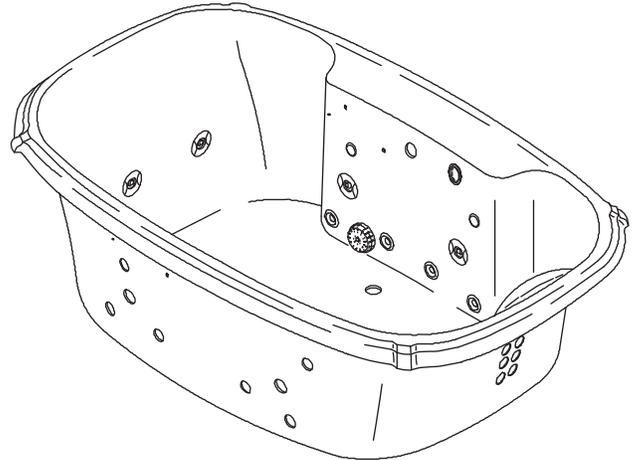

Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASME A112.19.7
- CSA B45.10
- CSA C22.2 No 218.2
- UL 1795
- ASTM E162
- ASTM E662

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass

Specified Model

Model	Description	Colors/Finishes	
K-1457-LV	5.5' Spa/Massage Experience bath whirlpool – pump at left (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1457-RV	5.5' Spa/Massage Experience bath whirlpool – pump at right	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Required Accessories

K-9653	Grab bars – pair	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
--------	------------------	-----------------------------	-----------------------------	--------------------------------------

Recommended Accessories

K-7161-AF	Adjustable pop-up drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
K-T15880/K-15708	Coralais base faucet (requires handle kit) OR	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
K-T15881/K-15708	Coralais base faucet (requires handle kit)	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
K-T16122/K-300-K	Revival faucet OR	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____

Product Specification

The acrylic bath whirlpool shall be 67" (1702 mm) in length, 42" (1067 mm) in width, and 22" (559 mm) in height. Product shall have 6 Flexjets, 8 effervescent ports, and 4 chromatherapy lights. Product shall feature a variable speed pump, 1.5 kW heater, back-lit user keypad and remote control. Product shall include ten color-matched sequencing Bodyssage backjets, color-matched jet trim, and two pulsating neckjets with pillow. Product shall be drilled for required grab bars. Product shall coordinate with Portrait Suite. Bath whirlpool shall be Kohler Model K-1457-____-____.

PORTRAIT®

Technical Information

Fixture*:				
Bathing well:				
Basin area, bottom	40" (1016 mm) x 27" (686 mm)			
Basin area, top	61" (1549 mm) x 32" (813 mm)			
Weight	160 lbs (73 kg)			
To overflow:				
Water depth	16" (406 mm)			
Capacity	90 gal (341 L)			
* Approximate measurements for comparison only.				
Drop-in cut-out			64" (1626 mm) x 38" (965 mm)	
Included component:			Cut-out template 113311-7	
Pump	Heater	V	Hz	A
	1.5 kW	240	50/60	15
Minimum access panel (required):				
Pump/control	34" (864 mm) W x 15" (381 mm) H			

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control	220-240 V, 20 A, 50/60 Hz
--------------	---------------------------

Installation Notes

Install this product according to the installation guide.

Maximum deck thickness should not exceed 2" (51 mm).


Floor support under whirlpool must provide for a minimum of 48 lbs/square foot (234 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

 Recommended Faucet Area

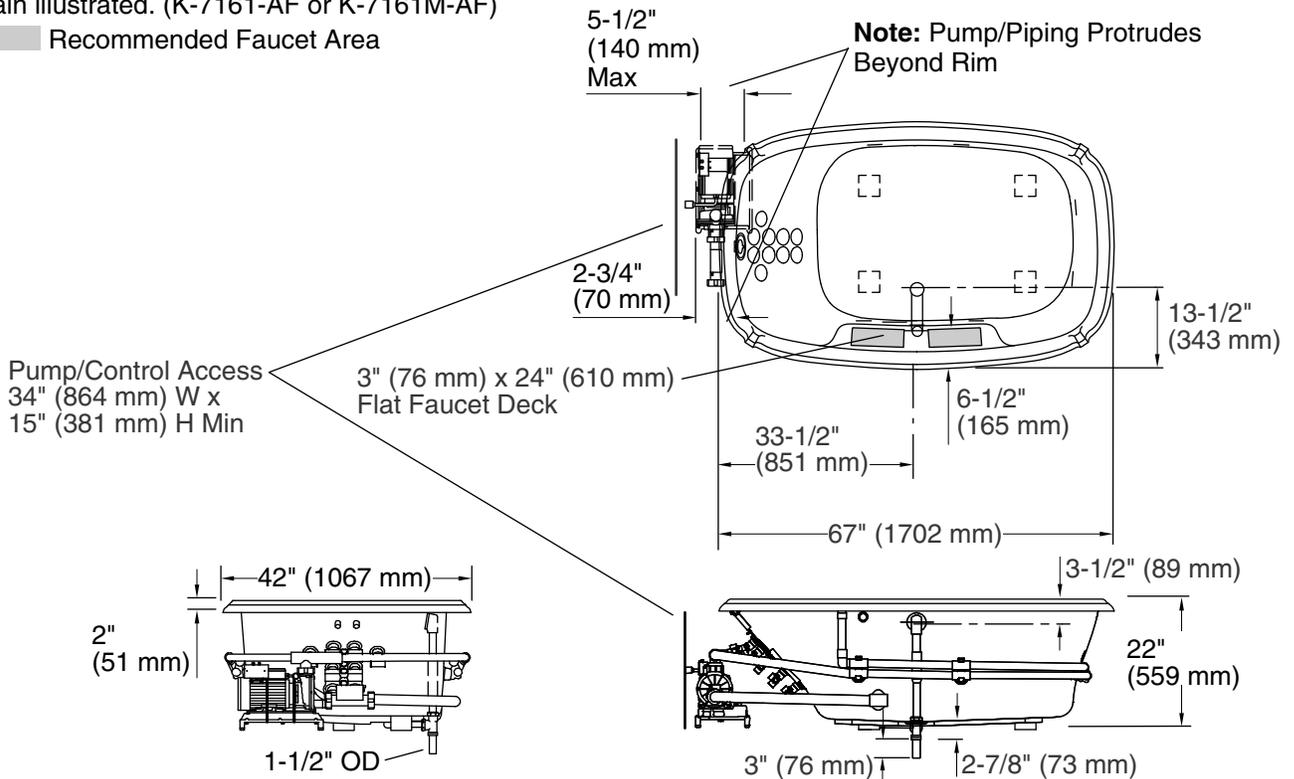

Product Diagram