


BUBBLEMASSAGE™ BATH K-1162-G

Features

- Acrylic
- Oval shape
- Drop-in
- 120 BubbleMassage™ airjets
- Blower motor is supplied with a grounding-type plug-in cord
- Molded lumbar supports and armrests
- Blower motor with 300 W heater and electronic user control
- 60" (1524 mm) x 42" (1067 mm) x 21" (533 mm)

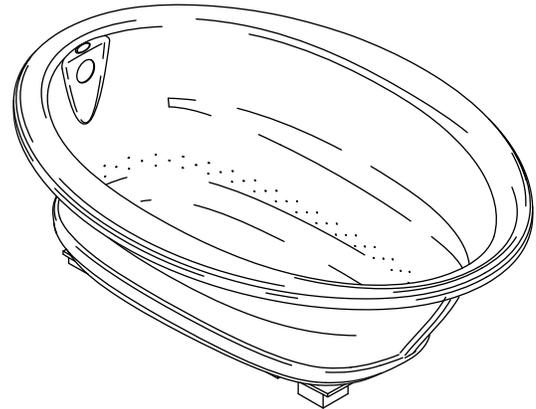

Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASME A112.19.7
- UL 1795
- ASTM E162
- ASTM E662

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes		
K-1162-G	Bubblemassage bath	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Recommended Accessories				
K-576	Undermount kit	<input type="checkbox"/> NA		
K-11677	Swiftflo™ adjustable trip lever drain		<input type="checkbox"/> CP	<input type="checkbox"/> PB

Product Specification

The acrylic drop-in bath shall be 60" (1524 mm) in length, 42" (1067 mm) in width, and 21" (533 mm) in height. Product shall have a blower motor with 300 W heater and an electronic user control. Blower motor shall have a grounding-type plug-in cord. Bath shall feature an oval shape. Bath shall feature 120 BubbleMassage airjets and molded lumbar supports and armrests. Bath shall be Kohler Model K-1162-G-_____.

SUNWARD®

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	43" (1092 mm) x 21-9/16" (548 mm)
Basin area, top	53-1/2" (1359 mm) x 32-1/8" (816 mm)
Weight	110 lbs (50 kg)
To overflow:	
Water depth	15" (381 mm)
Capacity	57 gal (215.9 L)
* Approximate measurements for comparison only.	

Included components:	
Cut-out template	1042556-7

Blower motor	Heater	V	Hz	A
	300 W	120	60	5

Minimum access panel blower motor:	
20" (508 mm) W x 15" (381 mm) H	required


Required Electrical Service

Dedicated circuit required, protected with a Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 5 A, 60 Hz
Locate the outlet behind the bath and within 24" (610 mm) of the blower.	

Installation Notes


Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 35 lbs/square foot (171 kg/square meter) loading.

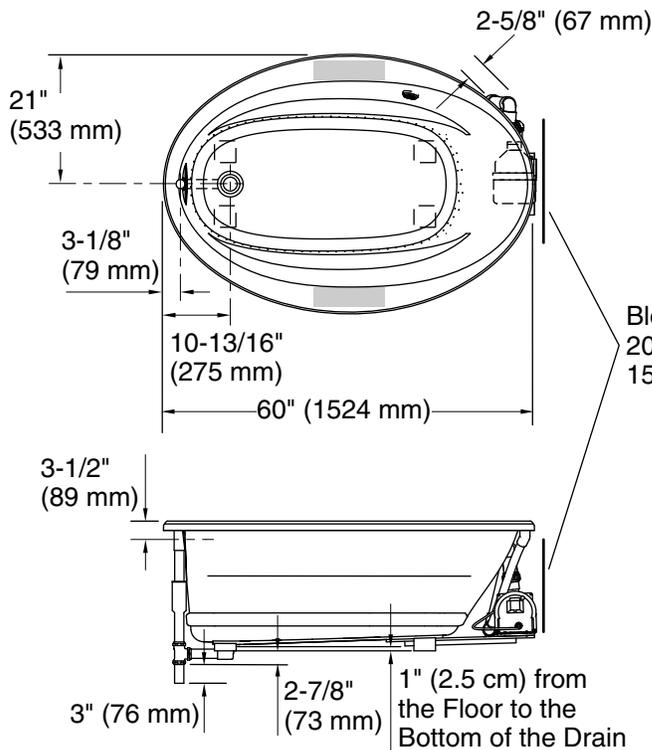


No change in measurements if connected with drain illustrated. (K-11677)

Recommended faucet area



Drop-In Rim Detail

Blower/Control Access
20" (508 mm) W x
15" (381 mm) H Min

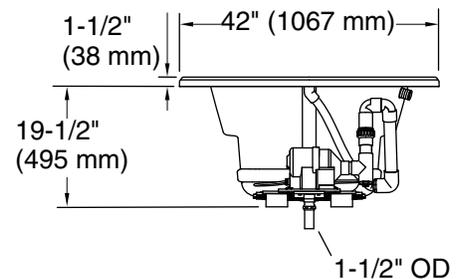

Product Diagram