

IV GEORGES BRASS®

Features

- Brass construction
- Available with lever handle
- Handle assembly
- Front seal plate assembly
- Complements IV Georges Brass™ Suite


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.18.1/CSA B125.1
- ASSE 1016

THERMOSTATIC TRIM SET **K-T10680** ALSO K-T10681, K-T10682

ADA CSA B651 OBC



Colors/Finishes

- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

For complete faucet, both faucet trim and valving must be specified.					
Model	Description	Colors/Finishes			
K-T10680-4	Thermostatic valve trim	□ PB	☐ Other		
K-T10681-4	Volume control trim	□ PB	☐ Other		
K-T10682-4	Transfer valve trim	□ PB	☐ Other		

Required Accessories				
K-2972-KS (replaces K-679-KS)	1/2" Thermostatic valve	□ NA		
K-2974-K (replaces K-681-K)	1/2" Volume control	□ NA		
K-2975-KS (replaces K-669-KS)	3/4" Thermostatic valve	□ NA		
K-2977-K (replaces K-671-K)	3/4" Volume control	□ NA		
K-728-K	3/4" Transfer valve	□ NA		
K-737-K	3/4" Diverter valve	□ NA		
K-10140	Ceramic dial faceplate for K-T10680	☐ Other		


Product Specification

Thermostatic trim set shall be of brass construction. Trim shall include front seal plate assembly and handle assembly. Product shall be available with lever handle. Trim shall complement the IV Georges Brass_® Suite. Faucet trim shall be Kohler Model K-T___-, thermostatic valving shall be Kohler Model K-Model K-10680 shall be K-10140.

IV GEORGES BRASS®

Installation Notes

Install this product according to the installation guide.

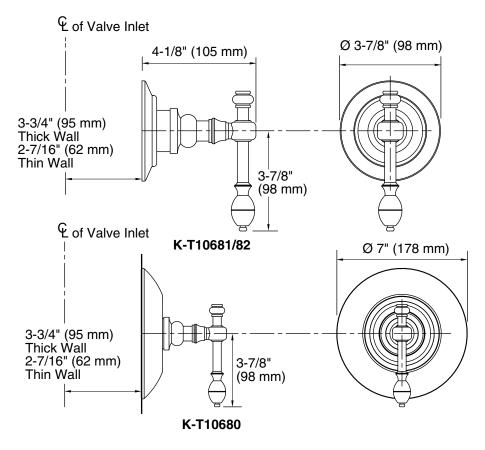

Product Diagram

