

**KITCHEN SINK FAUCET
K-15171**

ADA

CSA B651

OBC


Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit setting for added safety
- Ground joint connections
- ADA compliant loop or lever handle
- Available with an 8-1/2" (216 mm) or 10" (254 mm) swing spout reach
- Lower flow aerator options are available (refer to the Kohler Price Book)
- 2.2 gpm (8.3 lpm) maximum flow rate

Codes/Standards Applicable

Specified model meets or exceeds the following:

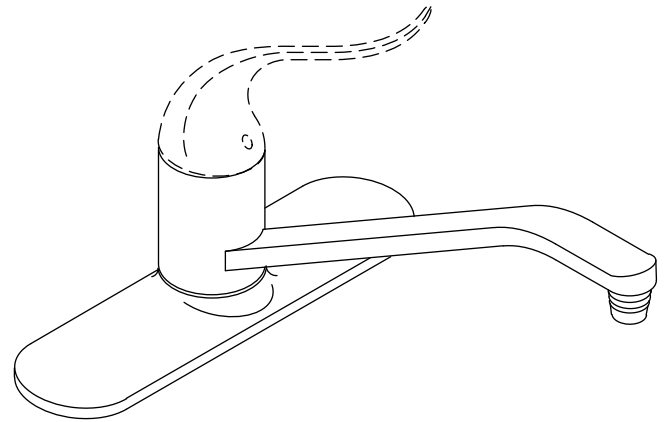

- ADA
- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- NSF 61
- Energy Policy Act of 2005
- All applicable US Federal and State material regulations
- CSA B651
- OBC



Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Lever Handle ADA CSA B651	Loop Handle ADA CSA B651
			
K-15171-P	Kitchen sink faucet – with 8-1/2" (216 mm) spout reach	<input type="checkbox"/> CP	
K-15171-PT	Kitchen sink faucet – with 10" (254 mm) spout reach	<input type="checkbox"/> CP	
K-15171-TL	Kitchen sink faucet – with 10" (254 mm) spout reach		<input type="checkbox"/> CP <input type="checkbox"/> Other _____
K-15171-XP	Kitchen sink faucet – with 8-1/2" (216 mm) swing spout, red/blue indexing	<input type="checkbox"/> CP	

Product Specification

The single-handle kitchen sink faucet shall be of metal construction. Product shall have a maximum flow rate of 2.2 gallons (8.3 L) per minute with lower flow aerator options available (refer to the Kohler Price Book). Product shall feature a one-piece, self-contained ceramic disc valve, which allows both volume and temperature control. Product shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Product shall feature a high-temperature limit stop setting for added safety and ground joint connections. Product shall be available with an ADA compliant loop or lever handle. Product shall be available with an 8-1/2" (216 mm) or 10" (254 mm) swing spout reach. Faucet shall be Kohler Model K-15171-____-____.


CORALAIS®

Installation Notes

Install this product according to the installation guide.

Product complies with ASME A112.18.1/CSA B125.1. All dimensions are nominal.

ADA, CSA B651, OBC compliant when installed to the specific requirements of these regulations.

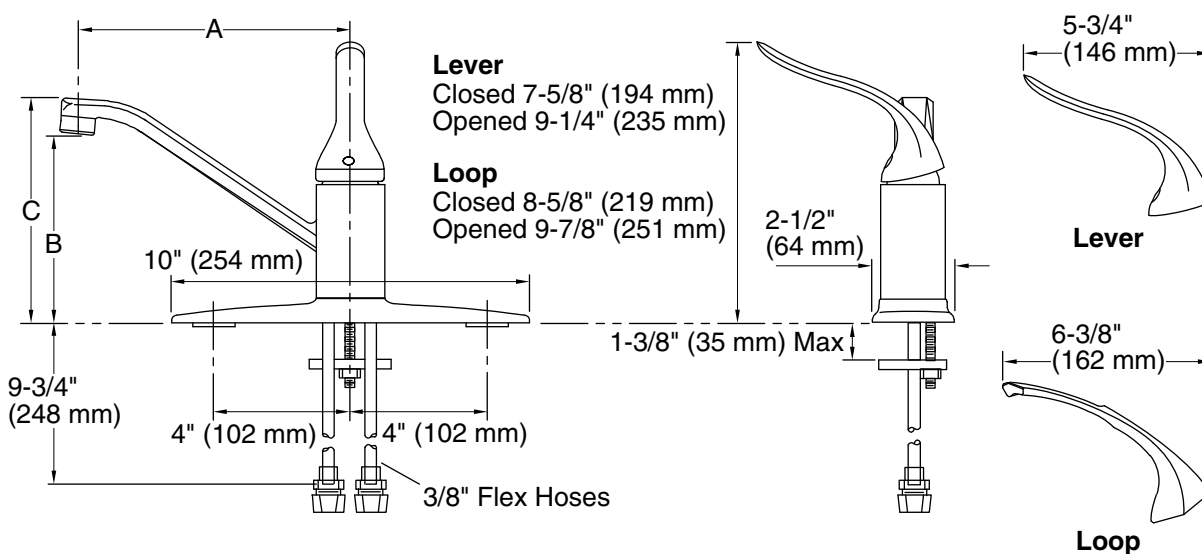

	A	B	C
K-15171, K-15171-P, K-15171-XP	8-1/2" (216 mm)	5" (127 mm)	6-1/8" (156 mm)
K-15171-PT, K-15171-TL	10" (254 mm)	5-3/4" (146 mm)	6-7/8" (175 mm)

Product Diagram