

Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit setting for added safety
- Ground joint connections
- Rotating spout
- Matching finish sidespray through the escutcheon
- Available with an 8-1/2" (216 mm) or 10" (254 mm) spout reach
- Lower flow aerator options available (refer to the Kohler Price Book)
- 2.2 gallons (8.3 L) per minute maximum flow rate


Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ICC/ANSI A117.1
- CSA B651
- ASME A112.18.1/CSA B125.1
- NSF 61
- Energy Policy Act of 2005

Specified Model

• All applicable US Federal and State material regulations

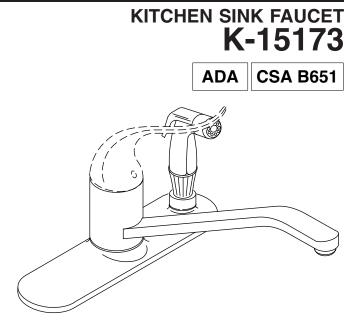

Colors/Finishes

• CP: Polished Chrome

Accessories

- CP: Polished Chrome
- NA: None applicable

Model	Description	ADA CSA B651	ADA CSA B651
K-15173-P	Kitchen sink faucet – 8-1/2" (216 mm) spout reach, lever handle	□ CP	
K-15173-PT	Kitchen sink faucet – 10" (254 mm) spout reach, lever handle	CP	
K-15173-TL	Kitchen sink faucet – 10" (254 mm) spout reach, loop handle		□ CP

Product Specification

The single-handle kitchen sink faucet shall be of metal construction. Product shall have a maximum flow rate of 2.2 gallons (8.3 L) per minute with lower flow aerator options available (refer to the Kohler Price Book). Product shall feature a one-piece, self-contained ceramic disc valve, which allows volume and temperature control. Product shall feature temperature memory, which allows the faucet to be turned on and off at any temperature setting. Product shall feature a high-temperature limit setting for added safety, rotating spout, ground joint connections, and a matching finish sidespray through the escutcheon. Product shall be available with an 8-1/2" (216 mm) or 10" (254 mm) spout reach. Faucet shall be Kohler Model K-15173-____-CP.


CORALAIS®

Optional Accessories				
K-15179-A	12" (305 mm) swing spout and aerator	□ CP		
1030920	Sidespray deep roughing-in kit		🗆 NA	

Installation Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

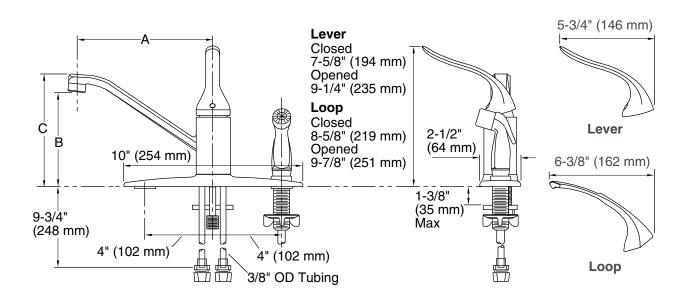

	А	В	С
K-15173-P	8-1/2" (216 mm)	5" (127 mm)	6-1/8" (156 mm)
K-15173-PT, K-15173-TL	10" (254 mm)	5-3/4" (146 mm)	6-7/8" (175 mm)

Product Diagram

