

### Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit setting for added safety
- Matching finish sidespray
- Ground joint connections
- Available with an 8-1/2" (216 mm) or 10" (254 mm) swing spout reach
- Lower flow aerator options are available (refer to the Kohler Price Book)
- 2.2 gpm (8.3 lpm) maximum flow rate

### Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:


- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.18.1/CSA B125.1
- NSF 61
- Energy Policy Act of 1992
- All applicable US Federal and State material regulations

## KITCHEN SINK FAUCET K-15176

ADA

CSA B651

OBC

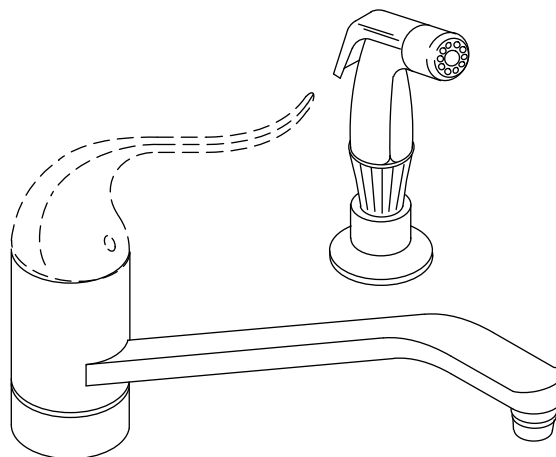

### Colors/Finishes

- CP: Polished Chrome

### Accessories

- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Lever Handle <small>ADA CSA B651</small>	Loop Handle <small>ADA CSA B651</small>
K-15176-P	Kitchen sink faucet – with 8-1/2" (216 mm) spout reach	<input type="checkbox"/> CP	
K-15176-PT	Kitchen sink faucet – with 10" (254 mm) spout reach	<input type="checkbox"/> CP	
K-15176-TL	Kitchen sink faucet – with 10" (254 mm) spout reach		<input type="checkbox"/> CP

### Product Specification

The single-handle kitchen sink faucet shall be of metal construction. Product shall have a maximum flow rate of 2.2 gallons (8.3 L) per minute with lower flow aerator options available (refer to the Kohler Price Book). Product shall feature a one-piece, self-contained ceramic disc valve, which allows both volume and temperature control. Product shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Product shall include ground joint connections and a matching finish sidespray. Product shall be available with an 8-1/2" (216 mm) or 10" (254 mm) swing spout reach. Faucet shall be Kohler Model K-15176-\_\_\_\_- CP.

# CORALAIS®

## Optional Accessories

1030920


Sidespray deep roughing-in kit

☐ NA

## Installation Notes

Install this product according to the installation guide.

**ADA, CSA B651, OBC** compliant when installed to the specific requirements of these regulations.

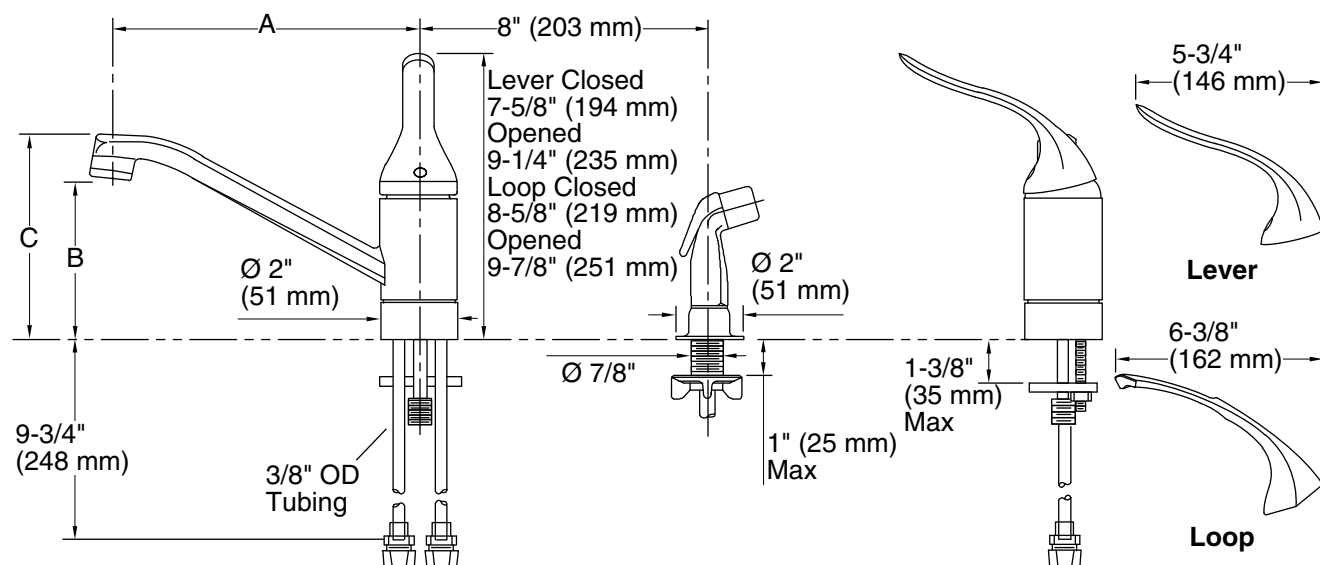

	A	B	C
<b>K-15176-P</b>	8-1/2" (216 mm)	5" (127 mm)	6-1/8" (156 mm)
<b>K-15176-PT</b>	10" (254 mm)	5-3/4" (146 mm)	6-7/8" (175 mm)
<b>K-15176-TL</b>	10" (254 mm)	5-3/4" (146 mm)	6-7/8" (175 mm)

## Product Diagram