

### Features


- Vitreous china
- Elongated bowl
- ADA compliant when installed at required height of 17" (432 mm) - 19" (483 mm) from floor to top of seat
- Blow-out
- Wall-mount
- 1-1/2" top spud
- 3.5 gpf (13.2 lpf)
- 14-1/2" (368 mm) x 11-3/8" (289 mm) water area
- 26" (660 mm) x 14" (356 mm) x 11-3/4" (298 mm)

### WATER-GUARD® BOWL K-4450-C

ADA

CSA B651

OBC

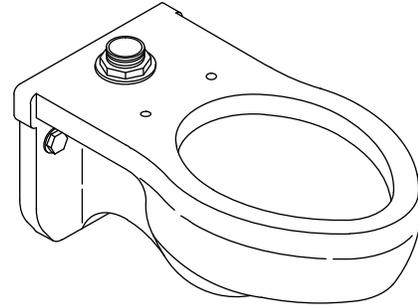

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.19.2 – 2003
- CSA B45.0 – 2004
- Energy Policy Act of 1992

### Colors/Finishes

- 0: White

### Accessories

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes
K-4450-C	Elongated bowl toilet	<input type="checkbox"/> 0

Recommended Accessories			
K-4670-C	Lustra™ open front seat	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-4670-CA	Lustra™ open front seat with anti-microbial agent	<input type="checkbox"/> 0	

### Product Specification

The elongated, wall-mount, blow-out bowl shall have a 1-1/2" top spud. Bowl shall be made of vitreous china. Bowl shall have 14-1/2" (368 mm) by 11-3/8" (289 mm) water area. Bowl shall be 3.5 gpf (13.2 lpf). Bowl shall be ADA compliant when installed at required height of 17" (432 mm) - 19" (483 mm) from floor to top of seat. Bowl shall be 26" (660 mm) in length, 14" (356 mm) in width, and 11-3/4" (298 mm) in height. Bowl shall be Kohler Model K-4450-\_\_\_\_\_-\_\_\_\_\_.

# STRATTON™

## Technical Information

Fixture:	
Configuration	Top spud, elongated
Water per flush	3.5 gal (13.2 L)*
Spud size	1-1/2"
Passageway	2-3/4" (70 mm)
Water area	14-1/2" (368 mm) x 11-3/8" (289 mm)
Water depth from rim	5-3/8" (137 mm)
Seat post hole centers	5-1/2" (140 mm)
Minimum static pressure required	45 psi (310.3 kPa)
Maximum static pressure	80 psi (551.5 kPa)
Minimum flowing pressure required	45 psi (310.3 kPa)
Required supply minimum	35 gpm (132.5 lpm)
* Designed to flush with 3.5 gal (13.2 L) of water when installed with a 3.5 gpf (13.2 lpf) valve.	
Included components:	
Spud	18357

## Installation Notes


Install this product according to the installation guide.

Refer to manufacturer and local codes for flush valve requirements.

Will comply with the American Disabilities Act (**ADA**) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

Will comply with **CSA B651** when installed per Clause 4.3.6 of the standard.

Will comply with **OBC** when installed per Clause 3.8.3.8 and 3.8.3.9

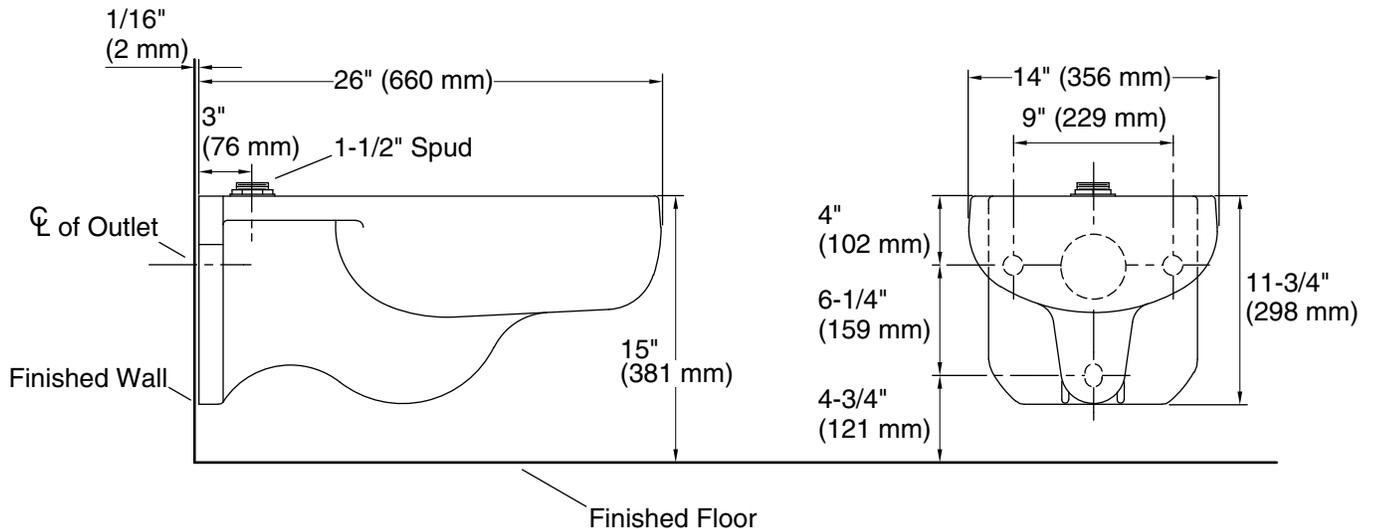

## Product Diagram