

Features

- Brass construction
- Fixture-mount design
- Intended for urinal installations with 3/4" spud coupling connection
- Includes a 9 V lithium battery
- Electronic infrared sensor with WAVE technology for accurate activation
- Retrofit models require a control stop and vacuum breaker
- 1.0 gpf (3.8 lpf) flush flow rate [K-10676, K-10679]
- 0.5 gpf (1.9 lpf) flush flow rate [K-10675, K-10678]
- Slow-closing piston technology
- WaterSense® compliant [K-10675, K-10678] when used with K-4960-ET or K-5016-ET urinals

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- CSA B64
- CSA B125.3
- ASSE 1037
- FCC 47, Part 15
- EN 55022
- ASME A112.18.1/CSA B125.1
- EPA WaterSense® [K-10675, K-10678]

Specified Model

Model	Description	Colors/Finishes
K-10675	Exposed WAVE flushometer, 0.5 washdown – 0.5 gpf (1.9 lpf)	<input type="checkbox"/> CP
K-10678	Exposed WAVE flushometer, retrofit - 0.5 washdown – 0.5 gpf (1.9 lpf)	<input type="checkbox"/> CP
K-10676	Exposed WAVE flushometer, 1.0 washdown – 1.0 gpf (3.8 lpf)	<input type="checkbox"/> CP
K-10679	Exposed WAVE flushometer, retrofit - 1.0 washdown – 1.0 gpf (3.8 lpf)	<input type="checkbox"/> CP

Product Specification

Exposed electronic flushometer shall be made of brass construction. Flushometer shall feature electronic infrared sensor with WAVE technology for accurate activation. Flushometer shall be fixture-mount design. Flushometer is intended for urinal installations with a 3/4" spud coupling connection, and retrofit models require a control stop and vacuum breaker. Flushometer shall have a 1.0 gpf (3.8 lpf) per flush flow rate [K-10676, K-10679] or 0.5 gpf (1.9 lpf) per flush flow rate [K-10675, K-10678]. Flushometer shall be WaterSense compliant when used with K-4960-ET or K-5016-ET urinals. Flushometer includes a 9 V lithium battery. Flushometer shall have slow-closing piston technology. Exposed electronic flushometer shall be Kohler Model K-_____-CP.


EXPOSED WAVE FLUSHOMETER K-10675

ALSO K-10676, K-10678, K-10679

ADA

CSA B651

OBC

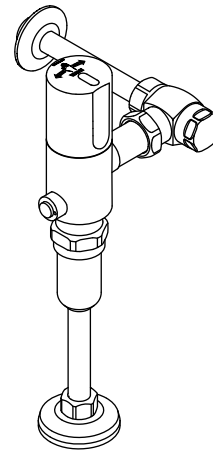

Colors/Finishes

- CP: Polished Chrome


Technical Information

Recommended operating pressure:
25 psi (172 kPa) flowing - 80 psi (552 kPa) static*
* Pressure over 80 psi (552 kPa) is not recommended on most plumbing fixtures.

Installation Notes

Install this product according to the installation guide.

*10-3/4" (273 mm) minimum with a 6" (152 mm) critical level above the fixture

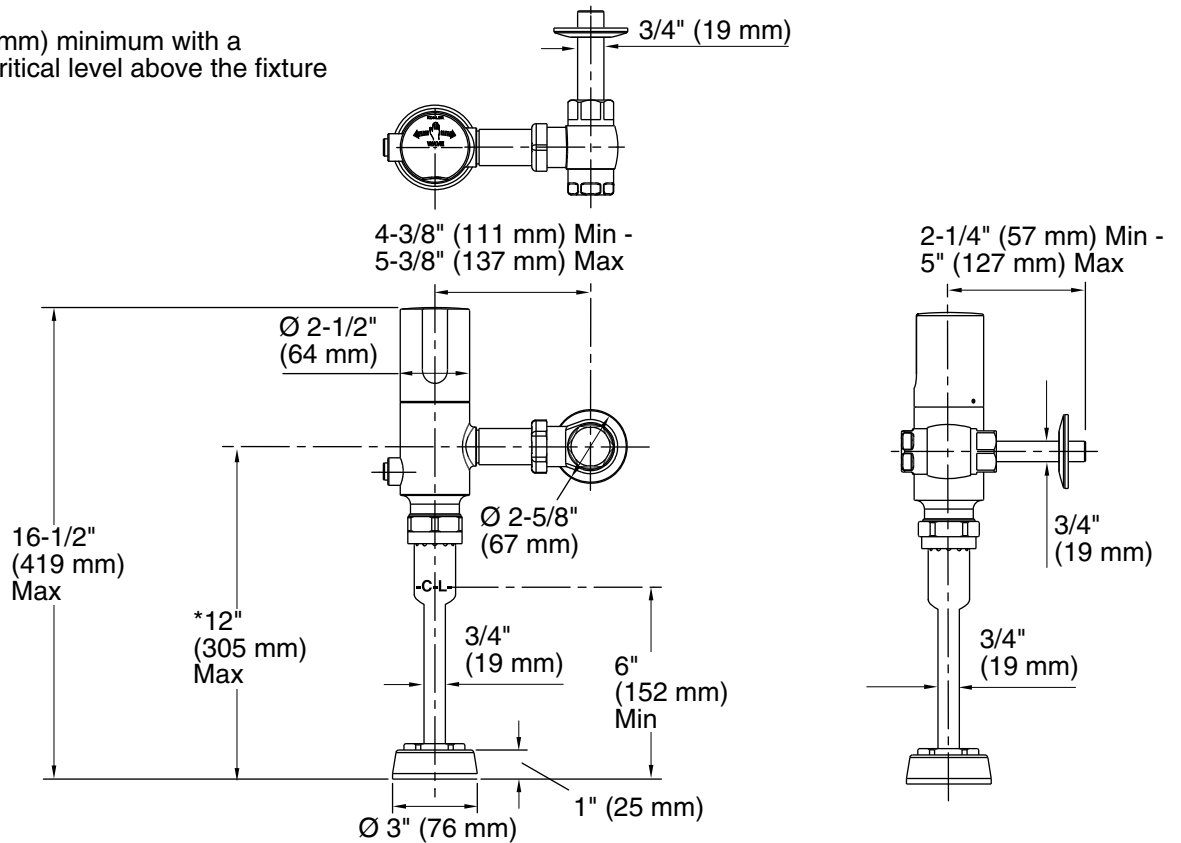

Product Diagram

EXPOSED WAVE FLUSHOMETER

Page 2 of 2
1108712-4-H

THE BOLD LOOK
OF **KOHLER**®