


Features

- Cast iron with Safeguard® finish
- Variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control
- 6 Flexjets™
- UL listed
- Less all trim
- ADA compliant when installed per Section 607 of the Act
- 60" (1524 mm) x 32" (813 mm) x 18-1/4" (464 mm)

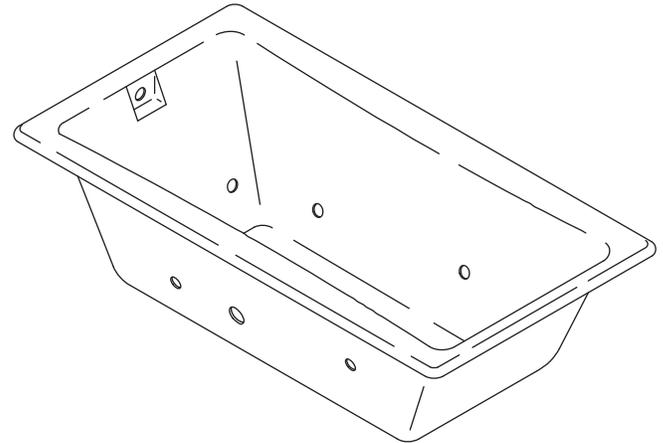

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1/CSA B45.2
- ASME A112.19.7
- CSA B45.10
- CSA C22.2 No 218.2
- UL 1795
- ADA
- ICC/ANSI A117.1

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-852-H2	5' bath whirlpool	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Required Accessories				
K-7169-AF	Clearflo pop-up bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-9696	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-586	Undermount installation kit (template and installation instructions)	<input type="checkbox"/> NA		
K-1179	Vinyl tiling-in bead (use when wall material contacts any top surface of the bath)	<input type="checkbox"/> NA		
K-1703	Remote control	<input type="checkbox"/> NA		

Product Specification

The bath whirlpool shall be 60" (1524 mm) in length, 32" (813 mm) in width, and 18-1/4" (464 mm) in height. Bath whirlpool shall be made of cast iron with Safeguard® finish. Bath whirlpool shall have 6 Flexjets, a variable speed pump with 1.5 kW heater, and back-lit user control. Bath whirlpool shall be ADA compliant when installed per Section 607 of the Act. Bath whirlpool shall be UL listed and less all trim. Bath whirlpool shall be Kohler Model K-852-_____-_____.

TEA-FOR-TWO®

Technical Information

Fixture*:			
Bathing well:			
Basin area, bottom	40-1/2" (1029 mm) x 20" (508 mm)		
Basin area, top	52-3/4" (1340 mm) x 24" (610 mm)		
Weight	290 lbs (131.5 kg)		
To overflow:			
Water depth	13-5/8" (346 mm)		
Capacity	60 gal (227.1 L)		
* Approximate measurements for comparison only.			
Pump	kW	V	A*
	1.5	240	11
* Approximate measurements for comparison only.			
Drop-in cut-out	58-1/2" (1486 mm) x 30-1/2" (775 mm)		
Cut-out for undermount	K-586 template		

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control	208-240 V, 20 A, 50/60 Hz
--------------	---------------------------


Installation Notes

NOTE: Pump protrusion beyond rim.

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 60 lbs/square foot (290 kg/square meter) loading.

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.

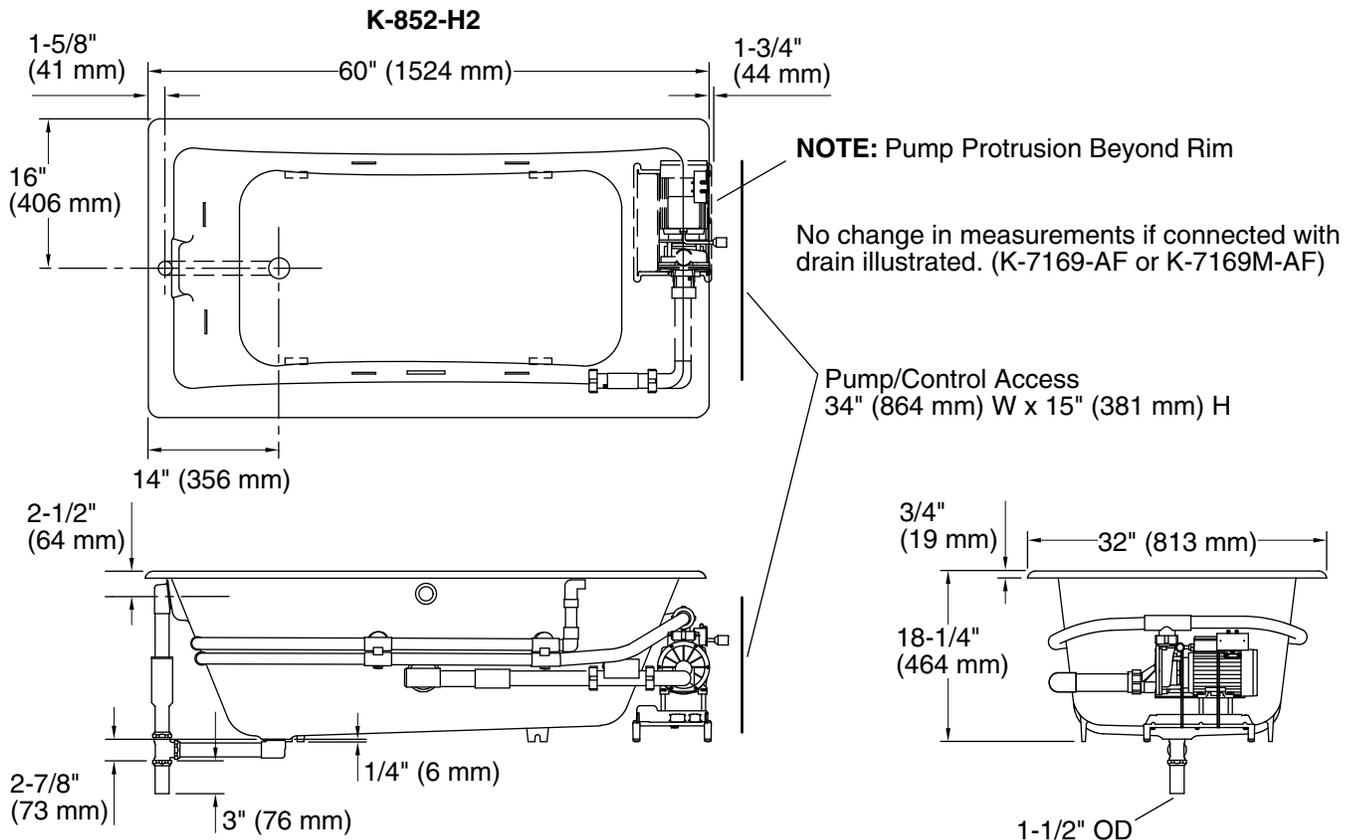

Product Diagram