

### Features

- Brass construction
- Requires and AC power supply
- Single-hole mounting
- Above-counter valve for easy installation and maintenance
- Vandal-resistant aerator
- 24" (610 mm) flexible supply hoses for easy installation
- 5" (127 mm) spout reach
- Stationary spout
- Available without mixer
- Less drain
- 0.5 gal/min (1.9 l/min) flow rate



ADA

CSA B651

OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 372

DOE - Energy Policy Act 1992

ADA

ICC/ANSI A117.1

CSA B651

OBC



All applicable US Federal and State material regulations


### KOHLER® Electronic Faucets, Valves, and Controls - Five-Year Limited Warranty

See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	VS	Vibrant® Stainless

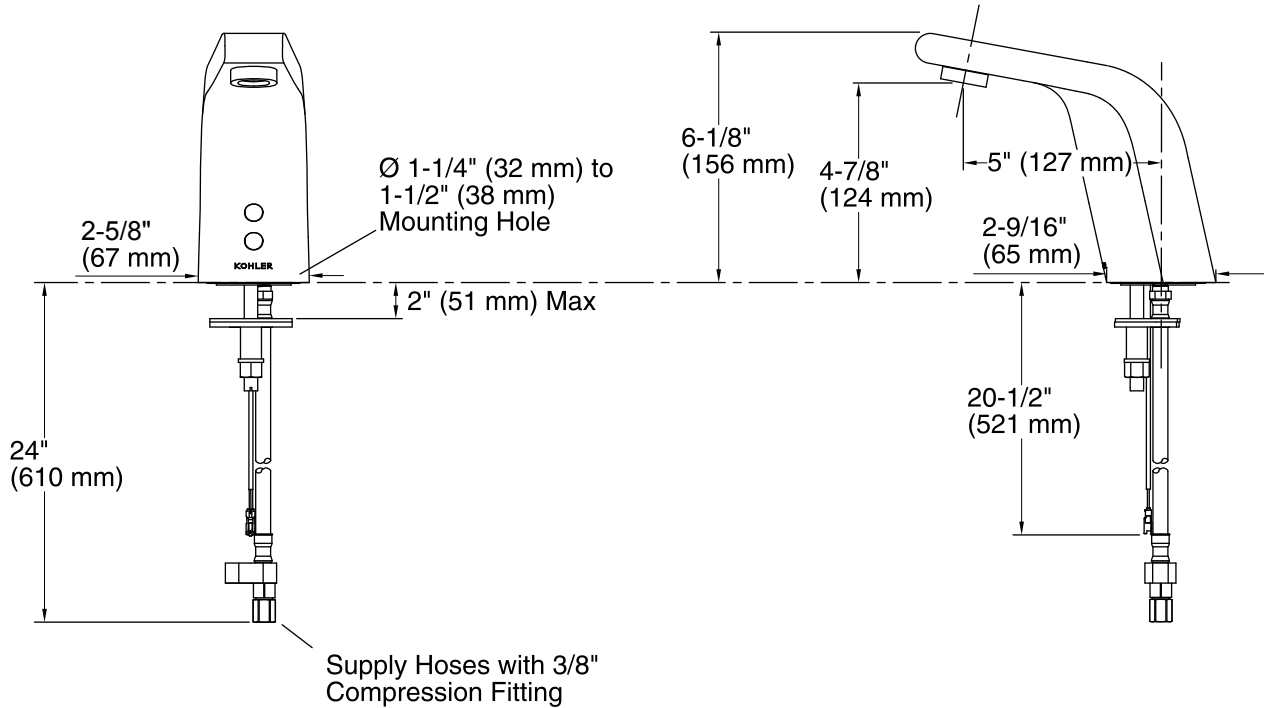

### Technical Information

All product dimensions are nominal.

Valve body: Machined Brass

### Faucet:

Flow rate: 0.5 gal/min (1.9 l/min)

### Notes

Install this product according to the installation guide.

A  $1\text{-}1/4\text{'' (32 mm)}$  minimum to  $1\text{-}1/2\text{'' (38 mm)}$  maximum diameter mounting hole is required.

The minimum distance between the back of the faucet spout and the wall must be  $1\text{-}3/4\text{'' (44 mm)}$ . This will allow proper clearance for setscrew access.

The maximum distance between the bathroom sink basin edge to the base of the faucet spout must be  $1\text{-}3/4\text{'' (44 mm)}$ .

The maximum height of the lip basin should be  $3/4\text{'' (19 mm)}$ .

Product includes rosebud spray aerator. Other aerator styles are available.

This product requires an AC power supply (not included).

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.