

### Features

- Fixture-mount design.
- Includes a 9 V lithium battery.
- 1.6 gpf (6.0 lpf) flow rate

### Material

- Brass construction.

### Technology

- Electronic infrared sensor with WAVE technology for accurate activation.
- Slow-closing piston technology.

### Installation

- Intended for toilet installations with 1-1/2" spud coupling connection.



ADA

CSA B651

OBC


### Codes/Standards

ASME A112.18.1/CSA B125.1  
CSA B64  
CSA B125.3  
ASSE 1037  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### Kohler Electronic Faucets, Valves, and Controls - Five-Year Limited Warranty

See website for detailed warranty information.

\*10-3/4" (273 mm) minimum with a  
6" (152 mm) critical level above the fixture

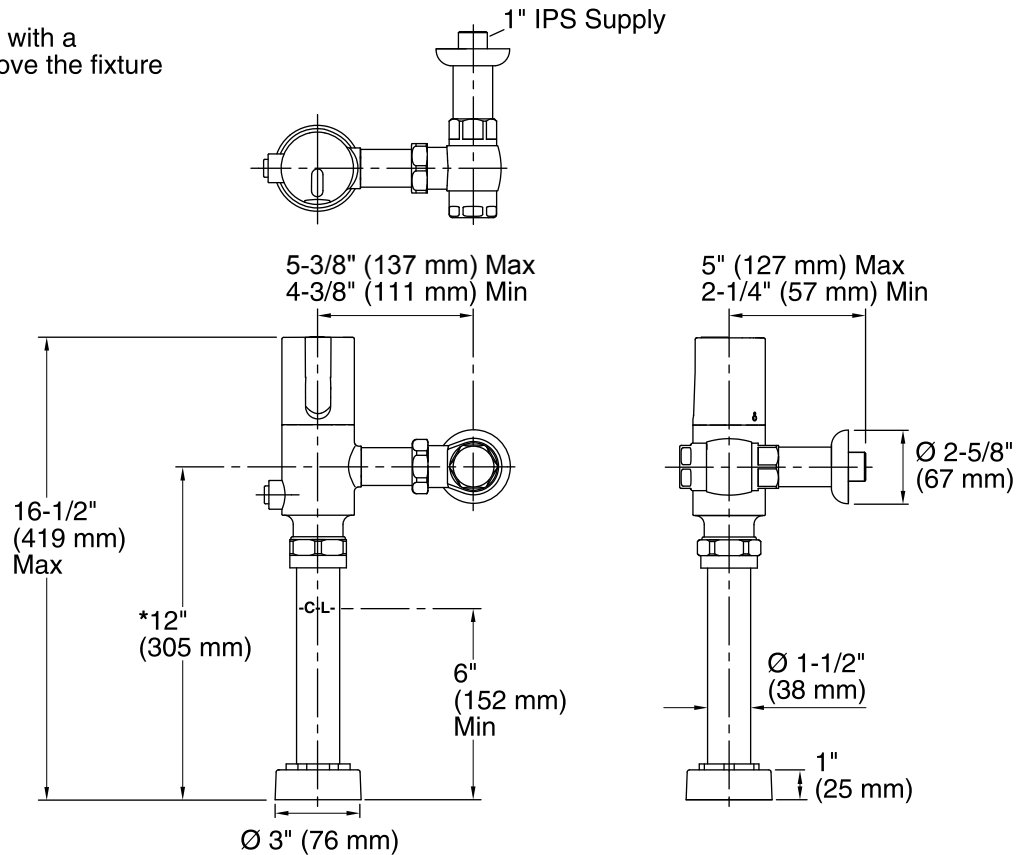

### Technical Information

All product dimensions are nominal.

Power source: 9V, included

### Notes

Install this product according to the installation guide.

Pressure over 80 psi (552 kPa) is not recommended on most plumbing fixtures.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.