

Features

- Metal and carbon fiber construction.
- Brass valve bodies.
- Articulating spout.
- One-piece faucet, self-contained ceramic disc valve allows both volume and temperature control.
- Countertop-mount installation.
- Integral sprayhead.
- 1-5/16" (33 mm) diameter remote joystick valve.
- With silver tube.
- Touch-activated drain.
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)].

Optional Accessories

1191733 Deep Rough-in Kit



ADA CSA B651 OBC

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

DOE - Energy Policy Act 1992

EPA WaterSense®

ADA

ICC/ANSI A117.1

CSA B651

OBC



All applicable US Federal and State material regulations


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	VS	Vibrant® Stainless

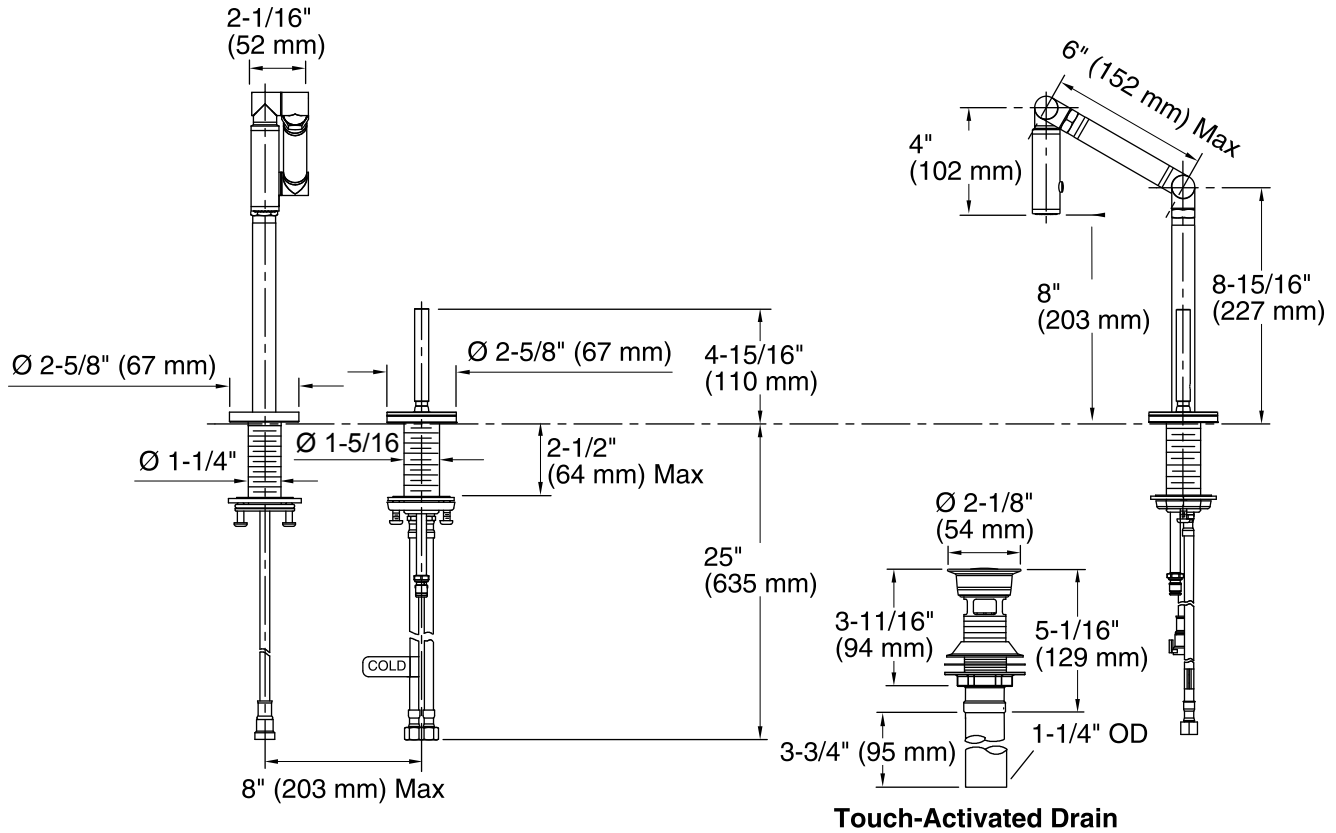

Technical Information

All product dimensions are nominal.

Spout reach: 6" (152 mm)

Drain included: YES

Drain tailpiece included: YES

Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.