

Features

- 19 gauge stainless steel
- Self-rimming or undercounter
- Single compartment
- Rounded bowl(s)
- SilentShield™ sound deadening
- Includes installation hardware
- 18-3/8" (46.7 cm) diameter (self-rimming)
- 15" (38.1 cm) diameter (undercounter)


SELF-RIMMING/UNDERCOUNTER SINK

K-3341
ALSO K-14302

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.3
- IAPMO/UPC
- CSA B45

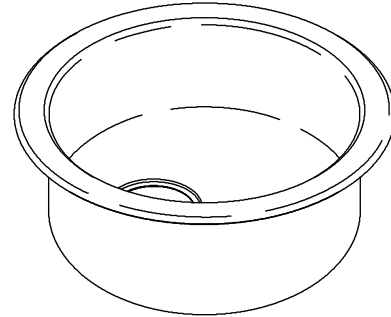

Colors/Finishes

- NA: None applicable
- SBV: Satin Bronze

Accessories:

- CP: Polished Chrome
- 0: White
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes
K-3341	Undercounter or self-rimming kitchen sink	<input type="checkbox"/> NA
K-14302	Undercounter or self-rimming entertainment sink	<input type="checkbox"/> SVB

Optional Accessories			
K-6004	Bottom basin rack	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____
K-6514	Hardwood cutting board	<input type="checkbox"/> NA	
K-6518	Wire rinse basket	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____
K-8801	Duostrainer® sink strainer	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-8813	Stainless steel sink strainer with tailpiece	<input type="checkbox"/> CP	
K-8814	Stainless steel sink strainer less tailpiece	<input type="checkbox"/> CP	

Product Specification

The round self-rimming sink shall be 18-3/8" (46.7 cm) in diameter. The round undercounter sink shall be 15" (38.1 cm) in diameter. Sink shall be made of 19 gauge stainless steel. Sink shall be single compartment. Sink shall include installation hardware. Sink shall include SilentShield Plus™ sound-deadening system. Sink shall be Kohler Model K-_____.

UNDERTONE™/LYRIC™

Technical Information

Fixture*:	
Basin area	15" (38.1 cm) D.
Water depth	7-1/2" (19.1 cm)
Drain hole	3-5/8" (9.2 cm) D.
*Approximate measurements for comparison only.	

Included components:	
Lug pack (self-rimming)	7257
Clamp accessory pack (undercounter)	52047
Cut-out template	113392-7



Installation Notes

Install this product according to the installation guide.

Supplied basin clamp assemblies require 1" (2.5 cm) minimum countertop thickness. Installer must supply hardware for thinner countertops.


For multiple bowl undercounter installations, a minimum distance of 3-1/2" (8.9 cm) is required between bowls. Countertop supplier to determine required support.

Waterproof unprotected overhang area of the underside of wood counter.

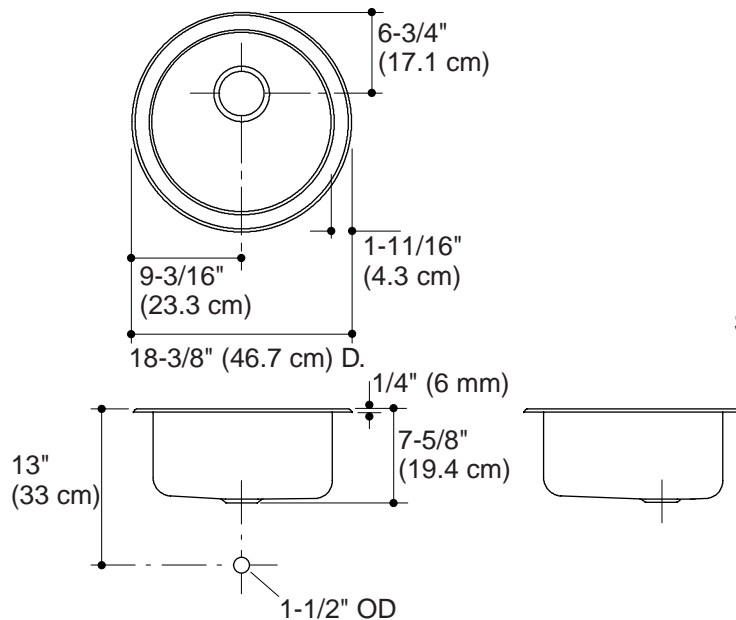

Self-Rimming Installation

Kit #7257

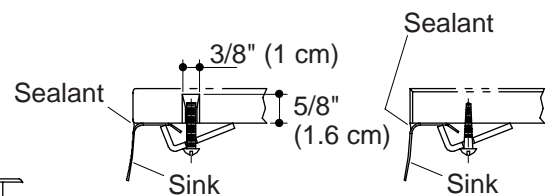

Marble Slab Installation

Wood Counter Installation

Kit #52047

Product Diagram

UNDERTONE™/LYRIC™ SELF-RIMMING/UNDERCOUNTER SINK

Page 2 of 2
114001-4-AE

THE BOLD LOOK
OF **KOHLER**®