



INSTALLATION


G U I D E

CORALAIS™  
PULL-OUT  
SPRAY  
KITCHEN  
FAUCET


K-15160, K-15160M


THE BOLD LOOK  
OF **KOHLER**®

## RECOMMENDED TOOLS AND MATERIALS

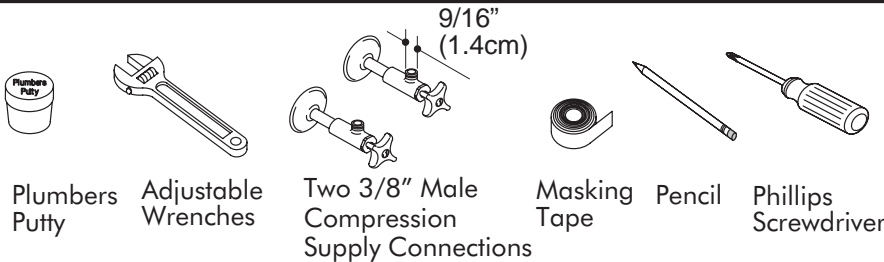

## BEFORE YOU BEGIN

 **CAUTION: Risk of restricted water flow and product damage.** Use extreme care when connecting all hoses to avoid kinking and twisting.

 **CAUTION: Risk of fresh water contamination.** This faucet contains important back-siphonage protection. Do not tamper with or remove any components.

- Observe local plumbing codes.
- Shut off the main water supply.
- If possible, install this faucet before installing the sink.
- Inspect the supply tubing for damage. Replace as necessary.
- Kohler Co. reserves the right to make revisions in the design of faucets without notice, as specified in the Price Book.
- Except for plumbers putty on the undercover or escutcheon, do not use petroleum based products on this faucet.


## 1. SECURE FAUCET

### FOR THREE-HOLE SINKS:

Apply a bead of plumbers putty or other sealant to the bottom edges of the undercover according to the putty manufacturer's instructions. Place the undercover over the sink holes, align, then press into place. Remove any excess putty. Place escutcheon over the undercover.


### FOR ONE-HOLE SINKS:

Position the gasket (O-ring) provided into the groove on the bottom of the escutcheon.

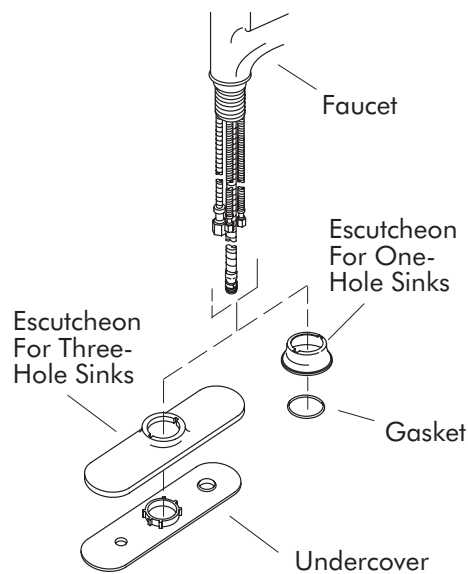

Fit the faucet through the sink hole. Position the faucet so the handle faces forward.


Partially thread two screws into the threaded ring until they barely protrude from the backside of the threaded ring. Slide the fiber washer and the metal washer onto the threaded shank, and thread the ring onto the threaded shank until it is about 1/4" (6mm) from touching the sink bottom. Turn the ring as needed so the screws are to the front and back of the faucet. Use a phillips screwdriver to securely tighten the screws evenly.

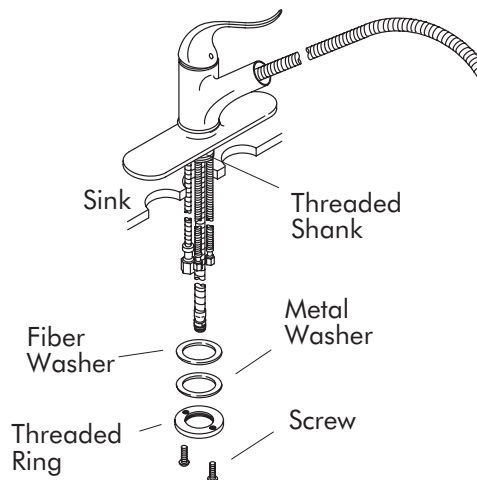


## 2. CONNECT HOSE

Slide the weight onto the spray hose.

**NOTE:** You can reduce the extendable length of the hose. Slide the weight into the desired position, and attach a small hose clamp or similar fitting (not supplied) directly under the weight. Tighten securely, but do not overtighten.

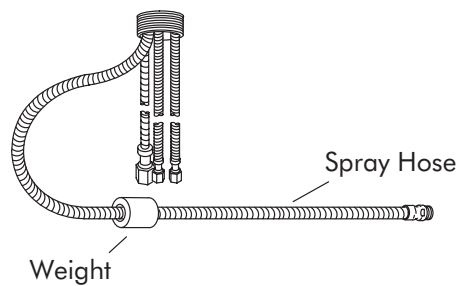

Insert the gasket into the valve outlet hose. Carefully thread the spray hose into the valve outlet hose. Tighten securely, but do not overtighten.

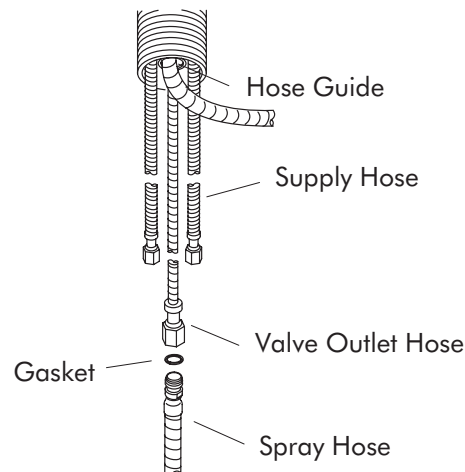


**IF THE SINK IS NOT INSTALLED, INSTALL IT AT THIS TIME. BE SURE TO FOLLOW ALL INSTRUCTIONS PACKED WITH THE SINK.**

### 3. CONNECT SUPPLIES

**NOTE:** If your installation requires that you coil the supply hoses to obtain a good connection, maintain an inside coil diameter of at least 3" (7.6cm).

Very carefully position the hot and cold supplies so they do not interfere with the spray hose and the weight. Connect the supply hoses to the supply stops. (Left is hot – right is cold.) Tighten all connections.

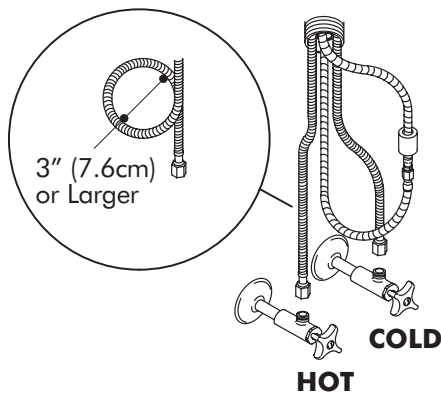


### 4. FLUSH LINES

Pull the sprayhead out to partially expose the hose. Remove the sprayhead and screen gasket. Position the hose in the sink. Tie or tape the hose to the sink to prevent it from sliding back into the faucet.

Turn on the hot and cold water supplies. Turn the faucet handle to the cold side and lift to the "ON" position. Run water through the faucet for about one minute to remove any debris. Without turning the water off, rotate the faucet to the hot side and flush for another minute.

Reinstall the screen gasket and sprayhead. Turn the water on and check for leaks.

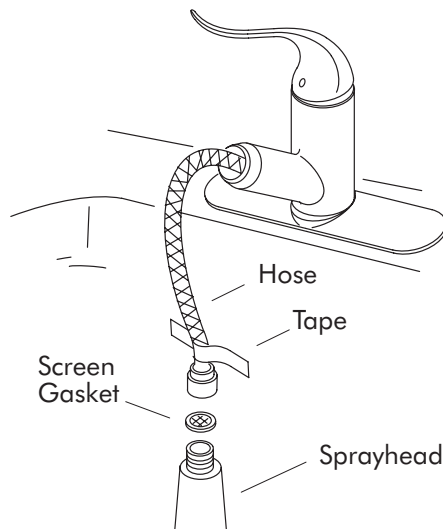

## 5. WATER TEMPERATURE ADJUSTMENT

If desired, adjust the maximum hot water temperature setting of this faucet.


Remove the handle and bonnet. Turn the water to the maximum temperature by pushing the valve stem up and turning clockwise.

Mark the current position of the temperature stop tab (top edge) on the mounting nut with a marker or pencil. Lift both the indexer and the disc just enough to clear the splines and allow rotation.

**NOTE:** Each spline notch represents an average 9.5° F (5.3° C) temperature change.

Turn the indexer, disc, and valve stem counterclockwise until the desired temperature is achieved. Reinstall the indexer and the disc to the valve, making sure the disc is snapped fully into the indexer.

Turn off the water by pulling the valve stem down. Reinstall the bonnet and handle.

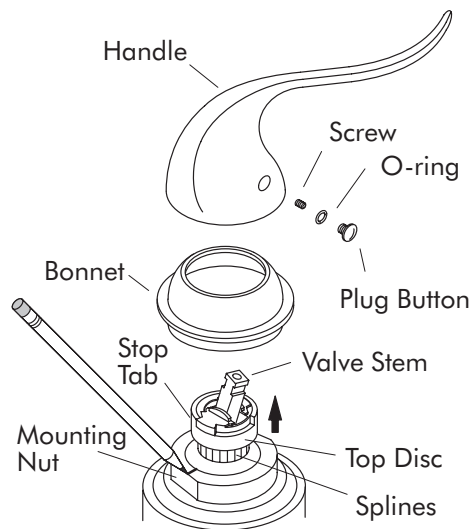


## 6. SERVICE PROCEDURES

---

### REDUCED SPRAY FLOW OR PERFORMANCE

With water running through the spray holes, firmly rub your finger back and forth across the nozzles to dislodge debris and mineral deposits.

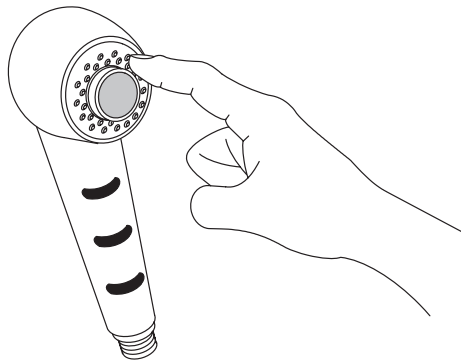

## **CALL US FOR HELP**

Questions? Problems? First review the installation instructions to ensure correct installation. For additional assistance, call our Customer Service Department for direct help. You may also contact us at our web site listed below.

**In the U.S.A., call 1-800-4-KOHLER**  
**In Mexico, call 001-877-680-1310**  
**In Canada, call 1-800-964-5590**

THE BOLD LOOK  
OF **KOHLER**<sup>®</sup>  
[www.kohlerco.com](http://www.kohlerco.com)