



**CENTERSET LAVATORY FAUCET
K-15681**

ADA

Features

- Metal construction
- 5" (12.7 cm) spout
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- 2.2 gallons (8.3 L) per minute
- Lower flow aerator options are available (refer to the Kohler Price Book)
- High-temperature limit stop for added safety
- Pop-up drain with tailpiece
- Lever handle
- Available with flexible connections or ground joints
- For 4" (10.2 cm) centers

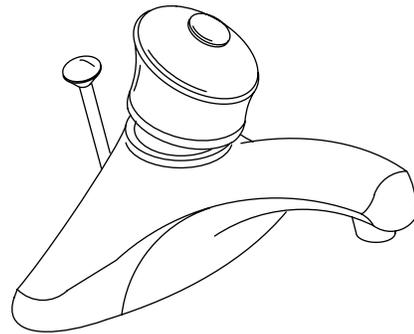

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1
- CSA B125
- IAPMO/UPC
- NSF 61
- Energy Policy Act of 1992 (EPACT)
- ADA

Colors/Finishes

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
		<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other ____
K-15681-F	Single-control centerset lavatory faucet with flexible connections	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other ____
K-15681-P	Single-control centerset lavatory faucet with ground joint connections	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other ____


Product Specification

Single-control centerset lavatory faucet shall be of metal construction and rated at 2.2 gallons (8.3 L) per minute. Product shall have lower flow aerator options. The valve shall be a one-piece, self-contained ceramic disc valve, and allows both volume and temperature control. The valve shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting, and includes a high-temperature limit stop. Product shall include 4" (10.2 cm) centers, 5" (12.7 cm) spout, pop-up drain with lift rod and tailpiece, and sculptured acrylic handle. Faucet shall be Kohler Model K-15681-_____-_____.

CORALAIS®

Installation Notes

Install this product according to the installation guide.

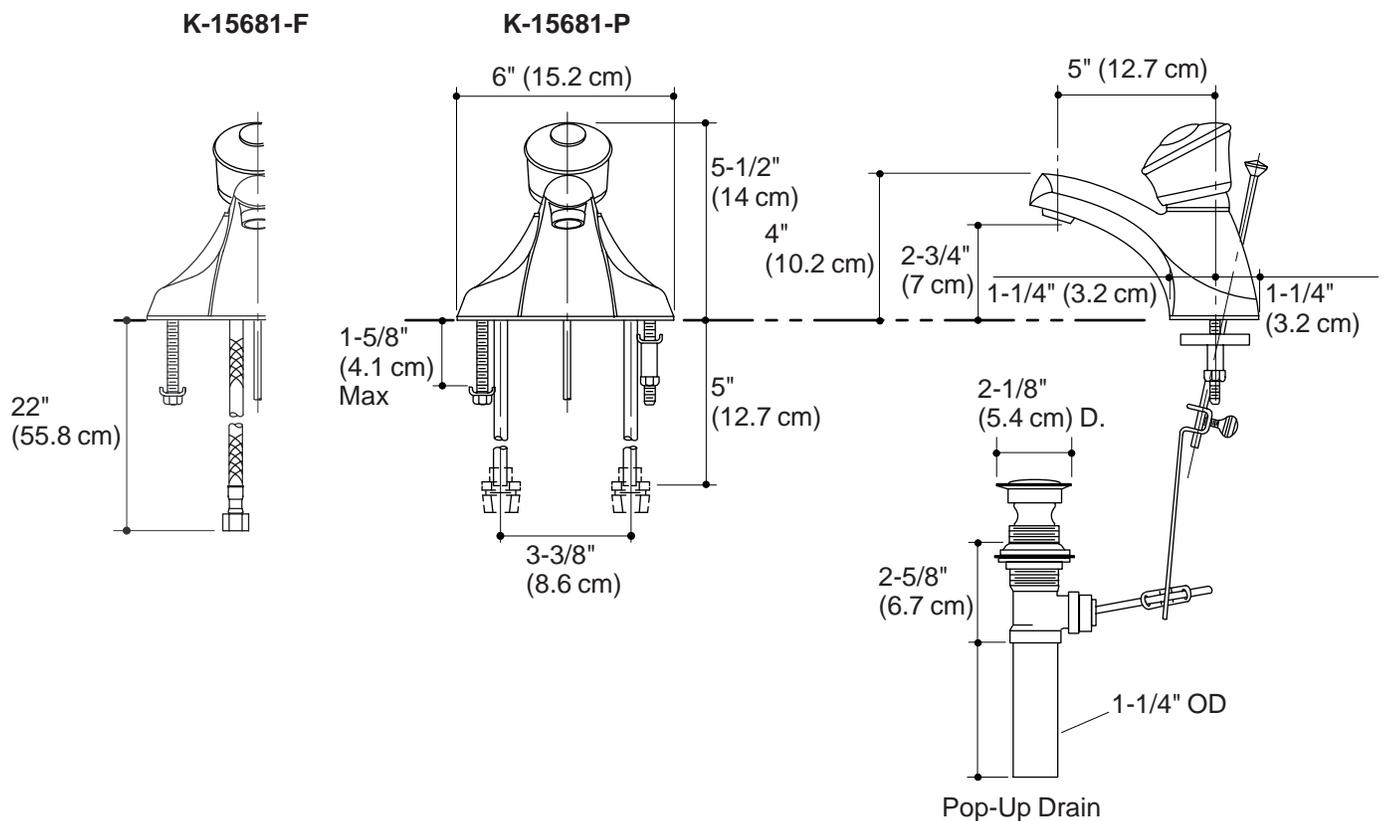

Product Diagram