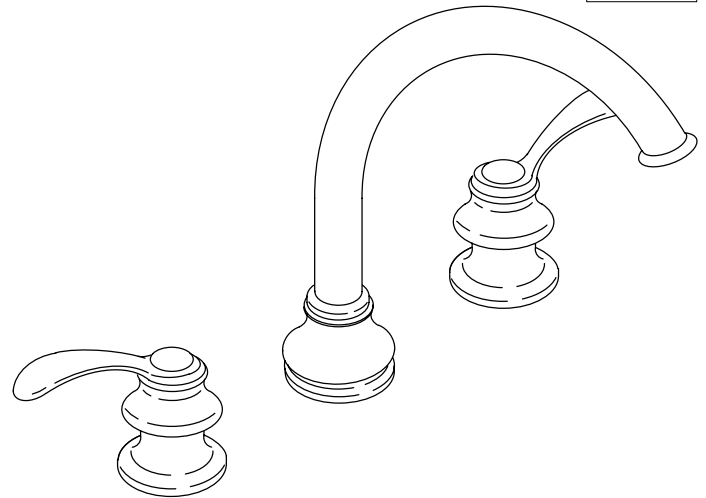# KOHLER FAUCETS ®

ADA

## FEATURES

- *Brass construction*
- *Bath- or Deck-mount*
- *8-7/8" high-arch non-diverter spout with slip-fit connection*
- *Lever handles*

## CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- *ASME/ANSI A112.18.1M*
- *CSA B125*
- *IAPMO/UPC*

## COLORS/FINISHES

- CP        Polished Chrome
- PB        Polished Brass
- Other    Refer to Faucets Price Book for additional finishes

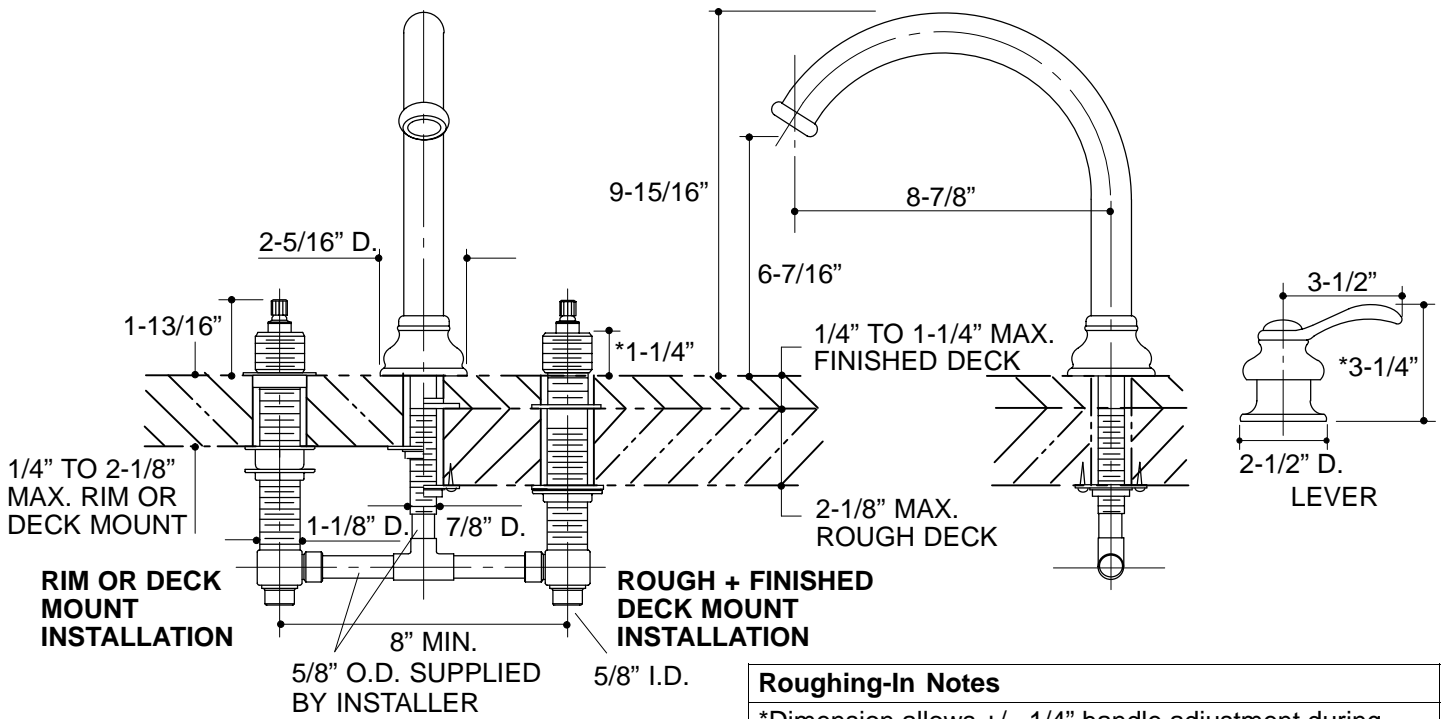## SPECIFIED MODEL: For complete faucet, both faucet trim and valve system must be specified.

| Model | Description | | | |
|-------|-------------|------|------|------|
| K-T12885-4 | Fairfax Bath- or Deck-Mount High-Flow Bath Faucet Trim | ☐CP | ☐PB | ☐Other_____ |

| Required Accessory | | |
|---------------------|---|---|
| | |  |
| K-300-K | 1/2" High-Flow Ceramic Disc Valve System | ☐NA |

**Optional Accessory on Page 2.**

## PRODUCT SPECIFICATION:

Two-handle bath- or deck-mount high-flow bath faucet trim shall be of brass construction. Product shall include 8-7/8" high-arch non-diverter spout with slip-fit connection, and lever handles. Faucet trim shall be Kohler Model K-T12885-4-_____ and valve system shall be Kohler Model K-300-K-NA.

# FAIRFAX ™

| **Optional Accessory** | | |
|---|---|---|
| K-12003 | Plug Button Set | ☐Other_____ |

9-15/16"

8-7/8"

2-5/16" D.

6-7/16"

1-13/16"

*1-1/4"

1/4" TO 1-1/4" MAX. FINISHED DECK

3-1/2"

*3-1/4"

1/4" TO 2-1/8" MAX. RIM OR DECK MOUNT

1-1/8" D.   7/8" D.

2-1/8" MAX. ROUGH DECK

2-1/2" D. LEVER

**RIM OR DECK MOUNT INSTALLATION**

8" MIN.

5/8" O.D. SUPPLIED BY INSTALLER

**ROUGH + FINISHED DECK MOUNT INSTALLATION**

5/8" I.D.

316

| **Roughing-In Notes** |
|---|
| *Dimension allows +/– 1/4" handle adjustment during handle trim installation. |

## PRODUCT DIAGRAM

THE BOLD LOOK OF **KOHLER.**