

RHYTHM_{TM}

Features


- 23-1/8" (58.7 cm) x 15-1/4" (38.7 cm)
- Undercounter
- 20 gauge stainless steel
- Mirror finish with Hushcoat undercoat (-M)
- Satin finish with Hushcoat undercoat (-S)
- Mottled finish with Hushcoat undercoat (-D)
- Crosschecked finish with Hushcoat undercoat (-E)
- Mirror French Gold finish without Hushcoat undercoat (-MF)
- Satin bronze finish without Hushcoat undercoat (-SBV)
- Installation hardware included
- Without overflow
- Chrome plated brass tube and gasket included to cover the overflow hole in the drain assembly

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.3
- CSA B45

VAL LAVATORY K-2602



Colors/Finishes

MF: Mirror French Gold

• SBV: Satin Bronze

NA: None applicable

Accessories:

• CP: Polished Chrome

• Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes
K-2602	Mirror French Gold finish without Hushcoat undercoat lavatory	□ MF
K-2602-S	Satin finish with Hushcoat undercoat lavatory	□ NA
K-2602-SBV	Satin bronze finish without Hushcoat undercoat lavatory	□ SBV
K-2602-M	Mirror finish with Hushcoat undercoat lavatory	□ NA
K-2602-D	Mottled finish basin, mirror finish rim with Hushcoat undercoat lavatory	□ NA
K-2602-E	Crosschecked finish, mirror finish rim with Hushcoat undercoat lavatory	□ NA

Recommended Accessories				
K-8998	P-trap	□ CP	☐ Other	
K-7702	Drain	□ CP	☐ Other	
K-7725	Drain	□ CP	☐ Other	
K-7726	Grid Drain	□ CP	☐ Other	

Product Specification

The oval lavatory shall be 23-1/8" (58.7 cm) in length, and 15-1/4" (38.7) in width. Lavatory shall be made of 20 gauge stainless steel. Lavatory shall be either self-rimming or undercounter installation. Lavatory shall have a satin finish with Hushcoat undercoat (-S), mirror finish with Hushcoat undercoat (-M), mottled finish with Hushcoat undercoat (-D), crosschecked finish with Hushcoat undercoat (-E), Mirror French Gold finish without Hushcoat undercoat (-MF) or satin bronze finish without Hushcoat undercoat (-SBV). Lavatory shall include hardware for each type of installation. Lavatory shall have a chrome plated brass tube and drain gasket to cover the overflow hole in the faucet drain assembly. Undercounter shall be Kohler Model K-2602-_____-___.

USA: 1-800-4-KOHLER Canada: 1-800-964-5590 kohler.com

$RHYTHM_{TM}$

Technical Information

Fixture:*	basin area	water depth
Lavatory	18" (45.7 cm) x 13" (33 cm)	5-7/8" (14.9 cm)
Drain hole	1-5/8" (4.1 cm) D.	

* Approximate measurements	for comparison only.	
----------------------------	----------------------	--

Included Components:		
Basin clamp assembly	68922	
Drain gasket	33507	
Tube	1011037-CP	
Cut-out template	1000258-7	


Installation Notes

Install this product according to the installation guide.

Supplied basin clamp assembly requires 3/4'' (1.9 cm) minimum countertop thickness. Installer must supply anchors for thinner countertops.

NOTICE: Countertop manufacturer or cutter must use the cut-out template provided by Kohler Co. (call 1-800-43-FOCUS). Kohler Co. is not responsible fo cut out errors when the incorrect cut-out template is used.

Waterproof the unprotected overhang area of the underside of the wood counter.

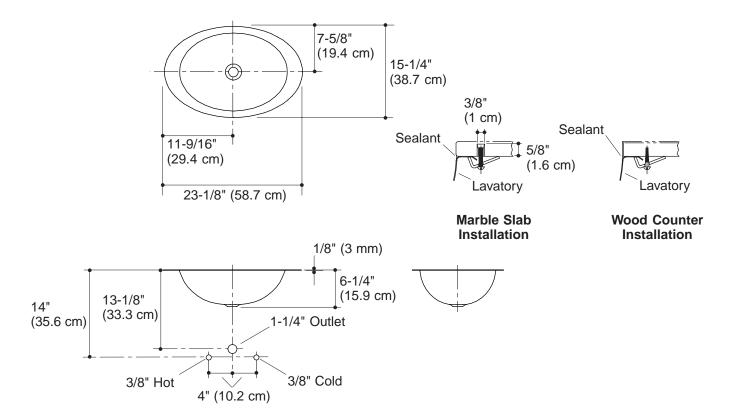

Product Diagram

