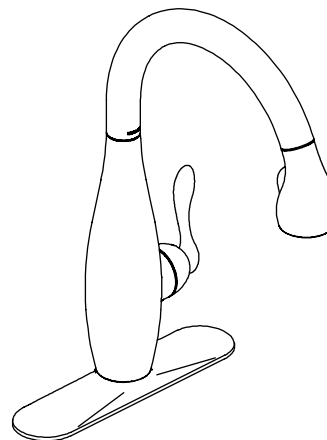


KITCHEN SINK FAUCET
K-692
ADA
Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit stop for added safety
- 2.2 gpm (8.3 lpm) flow rate
- Lower flow aerator options are available (refer to the Kohler Price Book)
- Touch control for stream-to-spray water flow
- Lever handle
- Integral vacuum breaker
- 9-1/2" (24.1 cm) swing spout with integral pullout spray and hose
- 10-1/2" (26.7 cm) escutcheon plate for three-hole installation


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/UPC
- Energy Policy Act of 1992 (EPACT)
- NSF 61
- ADA

Colors/Finishes

- CP: Polished Chrome
- BN: Brushed Nickel
- Other: Refer to Price Book for additional colors/finishes

Specified Model:


Model	Description	Colors/Finishes		
K-692	Kitchen sink faucet	<input type="checkbox"/> CP	<input type="checkbox"/> BN	<input type="checkbox"/> Other _____
Optional Accessories				
1012715	Deep rough-in kit Requires 1-7/16" (3.7 cm) to 1-1/2" (3.8 cm) diameter hole to accommodate 1-3/8" (3.5 cm) to 3-3/8" (8.6 cm) thick installations.	<input type="checkbox"/> NA		

Product Specification

Single-control pull-down spray kitchen sink faucet shall be of metal construction. Valve shall be a one-piece, self-contained ceramic disc valve, allowing volume and temperature control. Valve shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Valve includes a high-temperature limit stop. Faucet shall have a flow rate of 2.2 gallons (8.3 L) per minute. Lower flow aerator options shall be available. Faucet shall feature stream-to-spray touch control. Faucet shall include 9-1/2" (24.1 cm) swing spout with integral pullout sprayhead and hose, lever handle, integral vacuum breaker, and 10-1/2" (26.7 cm) escutcheon plate. Faucet shall be Kohler Model K-692-_____.

Installation Notes

Install this product according to the installation guide.

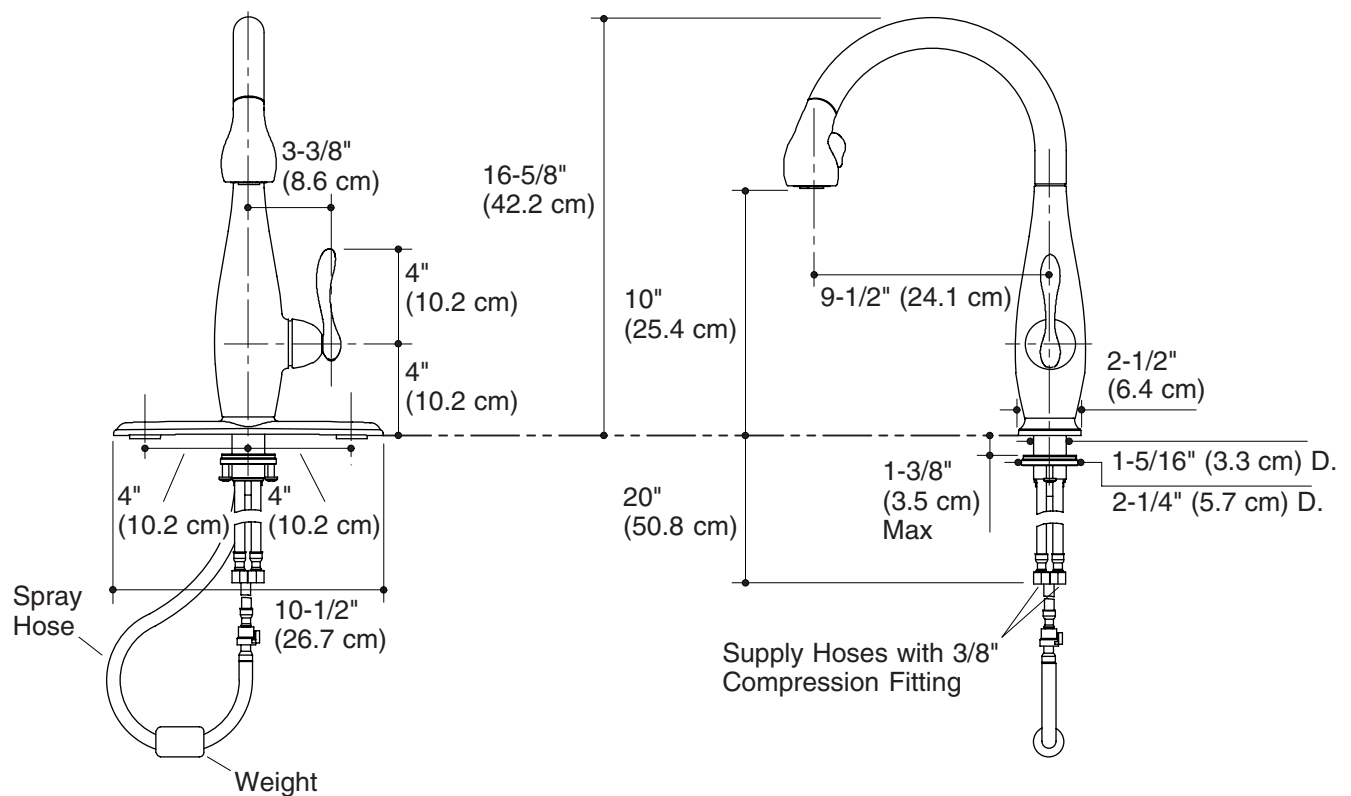

Product Diagram