

WELLWORTH_®

Features

- Vitreous china
- Round bowl
- Class Five_® flushing system
- Polished chrome trip lever
- Less seat and supply
- 14" (356 mm) rough-in
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) glazed trapway
- 10-1/2" (267 mm) x 7-3/4" (197 mm) water area
- 29-5/8" (752 mm) x 18-1/4" (464 mm) x 28-3/4" (730 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.2/CSA B45.1
- EPA WaterSense_®







Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- · CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Trip Lever	Colors/Finishes	
K-3947	Class Five toilet	left-hand	□ 0	☐ Other
K-3947-RA	Class Five toilet	right-hand	□0	☐ Other
K-3947-RZ	Class Five toilet with Insuliner® and tank cover locks	right-hand	□0	☐ Other
K-3947-T	Class Five toilet with tank cover locks	left-hand	□ 0	☐ Other
K-3947-TR	Class Five toilet with tank cover locks	right-hand	□ 0	☐ Other
K-3947-U	Class Five toilet with Insuliner	left-hand	□ 0	☐ Other
K-3947-UR	Class Five toilet with Insuliner	right-hand	□ 0	☐ Other
K-3947-UT	Class Five toilet with Insuliner and tank cover locks	left-hand	□ 0	□ Other

Product Specification

The toilet with round-front bowl shall be made of vitreous china. Toilet shall be 29-5/8" (752 mm) in length, 18-1/4" (464 mm) in width, and 28-3/4" (730 mm) in height with a 10-1/2" (267 mm) x 7-3/4" (197 mm) water area. Toilet shall be 1.28 gpf (4.8 lpf) with Class Five flushing system. Toilet shall have 2-1/8" (54 mm) glazed trapway. Toilet shall include polished chrome trip lever. Toilet shall be 14" (356 mm) rough-in. Toilet shall be less seat and supply. Toilet shall be Kohler Model K-3947-_____-

WELLWORTH_®

Recommended Accessories						
K-4639	Cachet _® Quiet-Close™ seat with Quick-Release™ functionality	□ 0		☐ Other		
K-4689	Cachet toilet seat with cover	□ 0		☐ Other		
K-7637	Angle supply with stop – 3/8" NPT		□ CP	☐ Other		


Technical Information

Fixture:	
Configuration	Two-piece, round
Water per flush	1.28 gpf (4.8 lpf)
Passageway	2-1/8" (54 mm)
Water area	10-1/2" (267 mm) x 7-3/4" (197 mm)
Water depth from rim	5-1/4" (133 mm)
Seat post hole centers	5-1/2" (140 mm)

Included components:				
Bowl	K-4197			
Tank	K-4841			
Tank cover	1145223			
Trip lever	K-9379			
Bolt cap accessory pack	1013092			

Installation Notes

Install this product according to the installation guide.

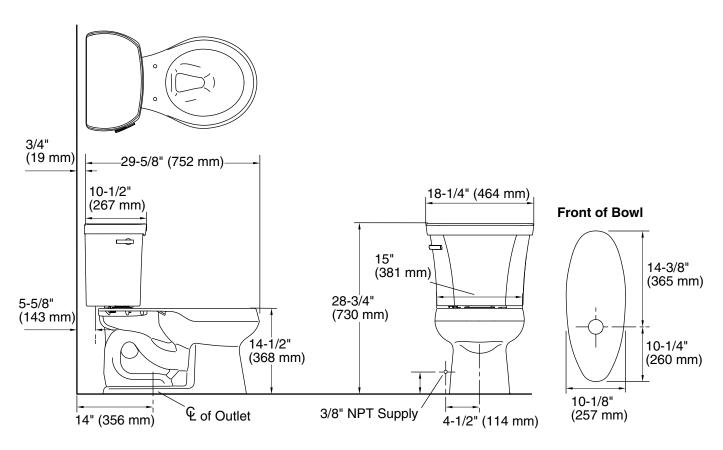

Product Diagram

