

OBLO™ RITE-TEMP®

Features

- Metal construction
- Brass valve bodies
- · High-temperature limit setting for added safety
- Rite-Temp_® pressure-balancing diaphragm design valve
- Mixing valve cycles from "cold" to "hot"
- Intended for use with Rite-Temp_ ${\it @}$ or HiFlow Rite-Temp_ ${\it @}$ valves
- Pressure-balancing mechanism of one-piece diaphragm cartridge design for ease of maintenance
- Oblong handle

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ASSE 1016

K-T10055-9 ALSO K-10044, K-T10056-9, K-T10057-9





Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Accessories

• NA: None applicable

Specified Model

Model	Description	Colors/Finishes		
K-T10055-9	Bath/shower valve trim with 1/2" IPS threaded spout	□ CP	☐ Other	
K-T10056-9	Shower valve trim, less diverter spout	□ CP	☐ Other	
K-T10057-9	Mixing valve trim	□ CP	☐ Other	
K-10044	Bath spout	□ CP	☐ Other	

Required Rite-Temp Valve					
K-304-K	Without stops, NPT connections OR	□ NA			
K-304-KP	With stops, CPVC connections OR		□ NA		
K-304-KS	With stops, NPT connections OR			□ NA	
K-305-K	Pressure-balancing valve, push-button diverter OR				□ NA

Product Specification

The bath/shower valve trim shall be made of metal construction with brass valve bodies. Product shall have a Rite-Temp pressure-balancing diaphragm design valve and pressure-balancing mechanism of one-piece diaphragm cartridge design for ease of maintenance. Product shall feature mixing valve cycles from "cold" to "hot," a high-temperature limit stop for added safety, and an oblong handle. Product is intended for use with Rite-Temp or HiFlow Rite-Temp valves. Bath/shower valve trim shall be Kohler Model K-T-_____-9-____ and required Rite-Temp valve shall be K-____-NA.

OBLOTM RITE-TEMP®

Required Rite-Temp Valve (continued)					
K-305-KS	Pressure-balancing valve, push-button diverter and screwdriver stops OR		□ NA		
K-306-KS	HiFlow with stops, NPT connections) NA
Optional A	ccessories				
1073881	Deep rough-in kit – for use with K-304-K, K-304-KP, K-304-KS and K-306-KS				□NA
1092535	Deep rough-in kit for valves with push button diverter – for use with K-305-K and K-305-KS	□СР	□ BN	□ SN	

Installation Notes


Install this product according to the installation guide.

Install the Rite-Temp valve according to the installation guide. **NOTICE:** If installing with the K-306-KS valve: Use 1-5/8" (4.1 cm) screws when attaching the seal plate to the valve. Do not use 2-3/8" (6 cm) screws, which will damage the valve.

Avoid cross-flow conditions. Do not install a shut-off device on either valve outlet.

Cap the shower outlet if the deck-mounted spout, diverter, or handshower is connected to the spout outlet.

Install a 7'' (17.8 cm) to 18'' (45.7 cm) straight pipe or straight tube with single bath elbow between the valve and the wall-mount spout.

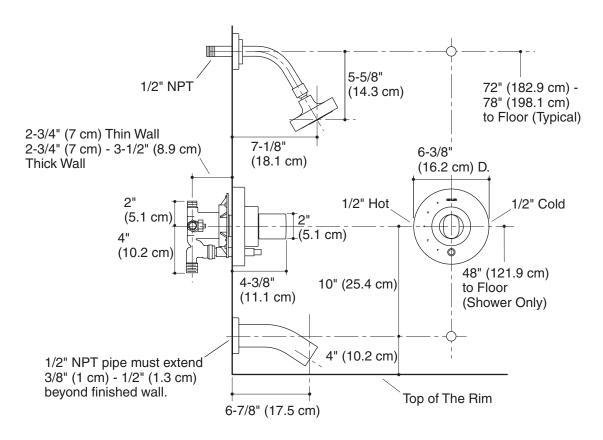

Product Diagram

