


K-702010

FEATURES

- Easy to install, with 3" (7.6cm) of width adjustment per door
- Installs on fiberglass, acrylic, or custom tiled applications
- Optional integrated accessories for added storage and functionality
- Frameless 1/4" (6mm) thick tempered safety glass operating panel
- 3/8" (1cm) thick tempered safety glass stationary panel for stability
- Right or left door swing
- Solid brass door handle

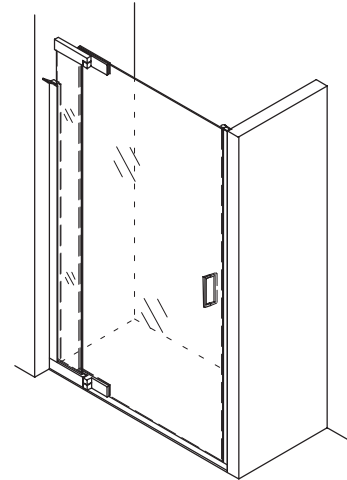

CODES/STANDARDS

Specified model meets or exceeds the following:

- ANSI Z97.1 (tempered glass)

GLASS OPTIONS

- D3 Frosted
- L Clear

COLORS/FINISHES


- SH Bright Silver Finish
- BH Bright Brass Finish
- BN Brushed Nickel Finish

SPECIFIED MODEL:


Model	Description	Glass Option		Colors /Finishes		
K-702010	Shower	<input type="checkbox"/> D3	<input type="checkbox"/> L	<input type="checkbox"/> SH	<input type="checkbox"/> BH	<input type="checkbox"/> BN
* K-702011	Shower	<input type="checkbox"/> D3	<input type="checkbox"/> L	<input type="checkbox"/> SH	<input type="checkbox"/> BH	<input type="checkbox"/> BN
K-702012	Shower	<input type="checkbox"/> D3	<input type="checkbox"/> L	<input type="checkbox"/> SH	<input type="checkbox"/> BH	<input type="checkbox"/> BN
* K-702013	Shower	<input type="checkbox"/> D3	<input type="checkbox"/> L	<input type="checkbox"/> SH	<input type="checkbox"/> BH	<input type="checkbox"/> BN
* Stock doors						

PRODUCT SPECIFICATION:

Purist™ pivot shower door. Door shall be easy install on fiberglass, acrylic, or custom tile showers, with 3" (7.6cm) of width adjustment per door. Door shall feature optional, integrated accessories for added storage and functionality and a solid brass door handle. Door shall have a 1/4" (6mm) thick tempered safety glass operating panel with 3/8" (1cm) glass stationary panel for stability. Door shall be able to be installed to swing either to the left or right. Door shall be Kohler Model K-_____-_____-_____.

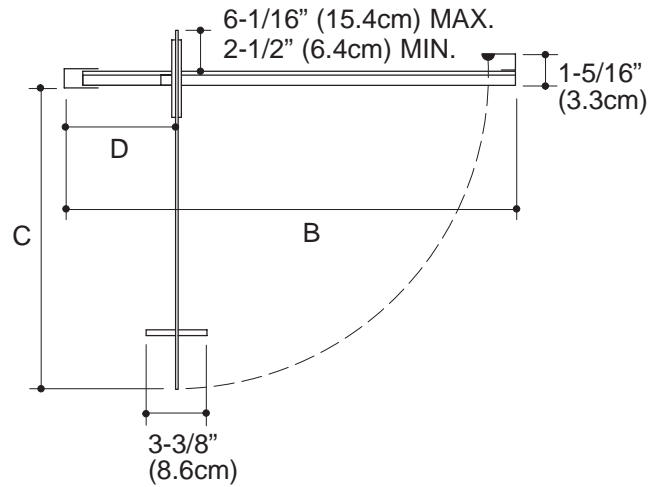

PLAN VIEW

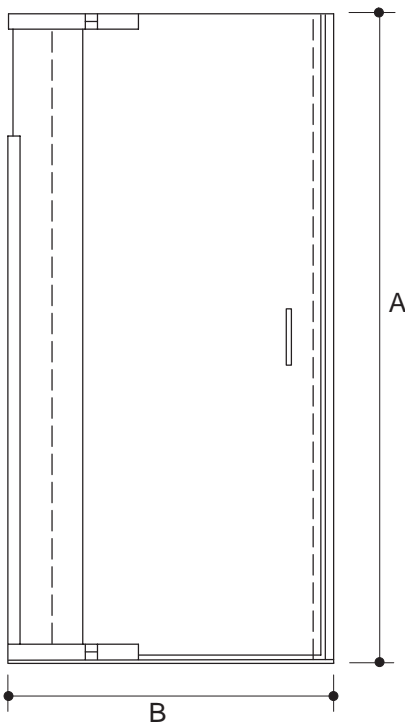

Rough-In Notes	A	B	C	D
K-702010	72" (182.9cm)	30" (76.2cm) - 33" (83.8cm)	20-5/16" (51.6cm) MIN. 23-15/16" (60.8cm) MAX.	9-1/16" (23cm)
K-702011	72" (182.9cm)	33" (83.8cm) - 36" (91.4cm)	23-5/16" (59.2cm) MIN. 26-15/16" (68.4cm) MAX.	9-1/16" (23cm)
K-702012	72" (182.9cm)	36" (91.4cm) - 39" (99.1cm)	26-5/16" (66.8cm) MIN. 29-15/16" (76cm) MAX.	9-1/16" (23cm)
K-702013	72" (182.9cm)	39" (99.1cm) - 42" (106.7cm)	29-5/16" (74.5cm) MIN. 32-15/16" (83.7cm) MAX.	9-1/16" (23cm)

PRODUCT DIAGRAM