

**WALL-MOUNT FAUCET
K-T448**

ADA


Features

- Dual control wall-mounted
- Brass construction
- 2.2 gpm (8.3 lpm) flow rate
- Lower flow aerator options are available (refer to the Kohler Price Book)
- Cross handles
- 8" (20.3 cm) spout

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/UPC
- Energy Policy Act of 1992 (EPACT)
- NSF 61
- ADA

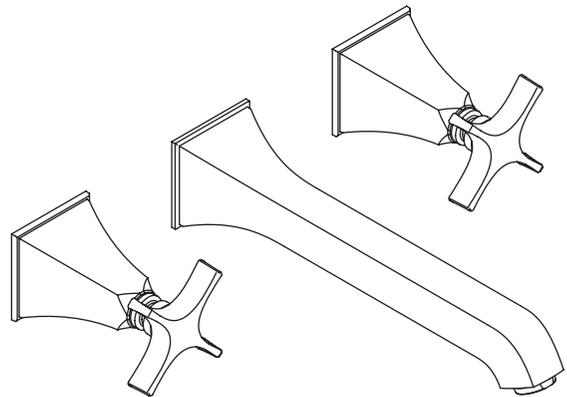

Colors/Finishes

- CP: Polished Chrome
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	 <input type="checkbox"/> ADA	
K-T448-3S	Stately cross handles, 8" (20.3 cm) spout	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
Required Accessories			
K-410-K	Wall-mount valve	<input type="checkbox"/> NA	

Optional Accessories on Page 2.

Product Specification

Dual-control wall-mount faucet shall be of brass construction. Faucet shall be rated at 2.2 gallons (8.3 L) per minute. Faucet shall have lower flow aerator options. Faucet shall include an 8" (20.3 cm) spout and cross handles. Faucet shall be Kohler Model K-T448-3S-_____.

MEMOIRS®


Optional Accessories					
K-7702	Pop-up lavatory drain	<input type="checkbox"/> CP			
K-7710	Lavatory drain		<input type="checkbox"/> CP		
K-7715	Lavatory drain			<input type="checkbox"/> CP	
K-8801	Duostrainer® sink strainer				<input type="checkbox"/> CP <input type="checkbox"/> Other_____

Installation Notes

Install this product according to the installation guide.

1-1/2" (3.8 cm) to 6" (15.2 cm) minimum distance must be maintained between the bottom of the spout and the top of the fixture rim.

Three 1-1/2" (3.8 cm) diameter cut-out holes required for spout and handles.

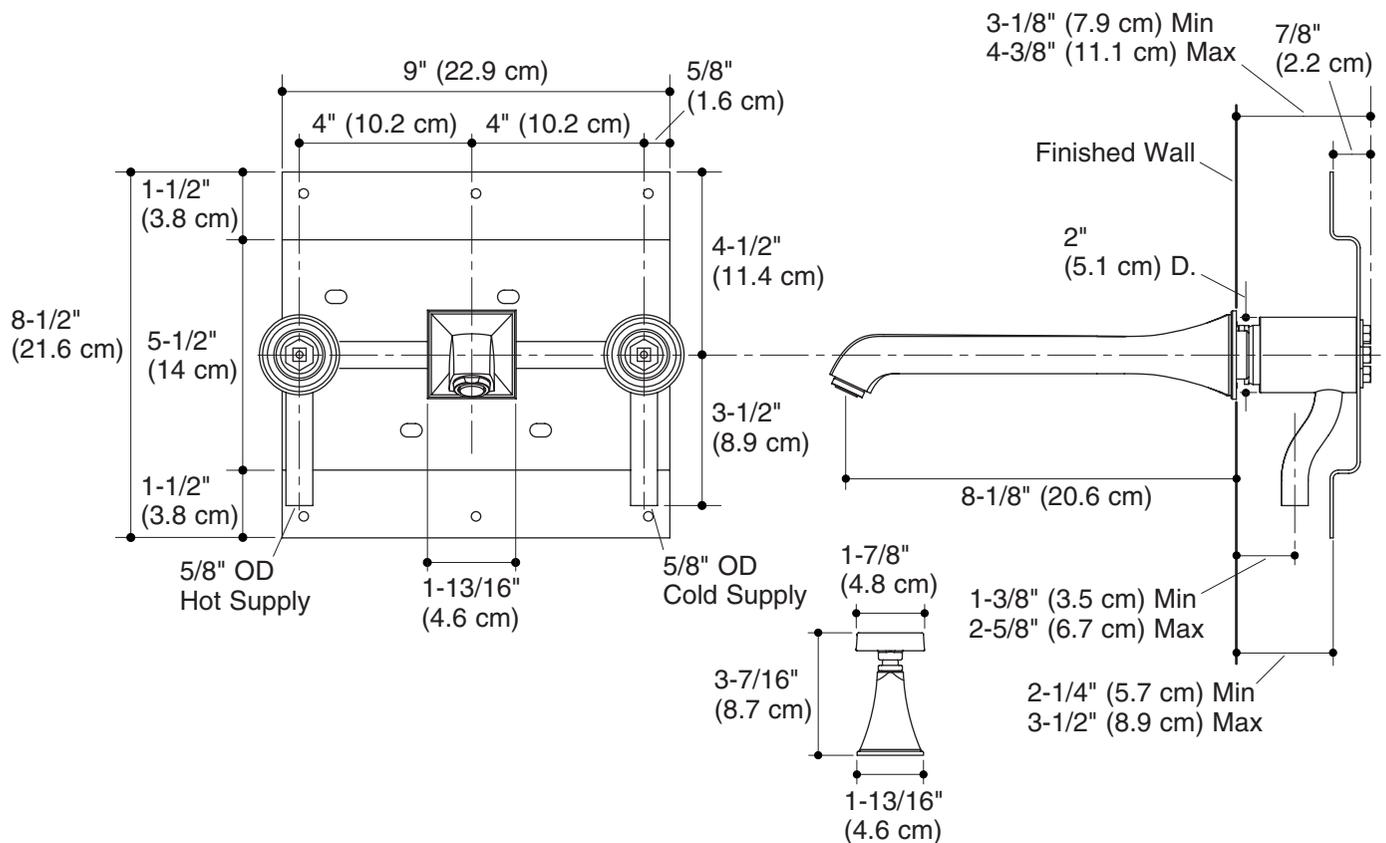

Product Diagram