

BATH WHIRLPOOL K-712-H2


Features

- Cast iron with Safeguard® finish
- 1.5 hp variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control
- 6 Flexjets™
- UL listed
- Less all trim
- 66" (167.6 cm) x 36" (91.4 cm) x 19-1/4" (48.9 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- IAPMO/UPC
- Underwriter's Laboratories (UL)
- ASME A112.19.1M
- ASME A112.19.7M

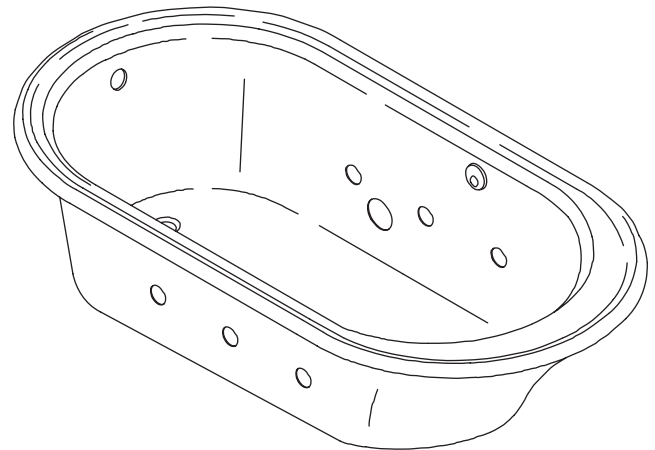

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-712-H2	Bath whirlpool	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Required Accessories				
K-9696	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Recommended Accessories				
K-7103	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-1172	Adjustable feet			<input type="checkbox"/> NA
K-1703	Remote control			<input type="checkbox"/> NA

Product Specification

The bath whirlpool shall be 66" (167.6 cm) in length, 36" (91.4 cm) in width, and 19-1/4" (48.9 cm) in height. Bath whirlpool shall be made of cast iron with Safeguard finish. Bath whirlpool shall have 6 Flexjets, 1.5 hp variable speed pump, 1.5 kW heater, and back-lit user control. Bath whirlpool shall be UL listed. Bath whirlpool shall be less all trim. Bath whirlpool shall be Kohler Model K-712-_____-_____-_____.

IRON WORKS®

Technical Information

Fixture*:	Basin area	Top area	Weight
Bathing well	47-1/2" (120.7 cm) x 25" (63.5 cm)	55" (139.7 cm) x 29" (73.7 cm)	500 lbs (227 kg)
Water depth (to overflow)		Capacity (to overflow)	
12-5/8" (32.1 cm)		64 gal (242.3 L)	
* Approximate measurements for comparison only.			

Pump	Heater	V	A*
1.5 hp	1.5 kW	240	11
* Approximate measurements for comparison only.			

Cut-out template		88051-7
Minimum access panel (required):		
Pump/control	34" (86.4 cm) W 15" (38.1 cm) H	

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Earth-Leakage Circuit-Breaker (ELCB):

Pump/control 208-240 V, 20 A, 50/60 Hz

Installation Notes

Install this product according to the installation guide.


Floor support under whirlpool must provide for a minimum of 1500 lbs (680.4 kg) loading.

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.

Hot water supply should be 70% of capacity or greater. Installations will vary.

No change in measurements if connected with drain illustrated. (K-7103 or K-7103M)

K-712-H2

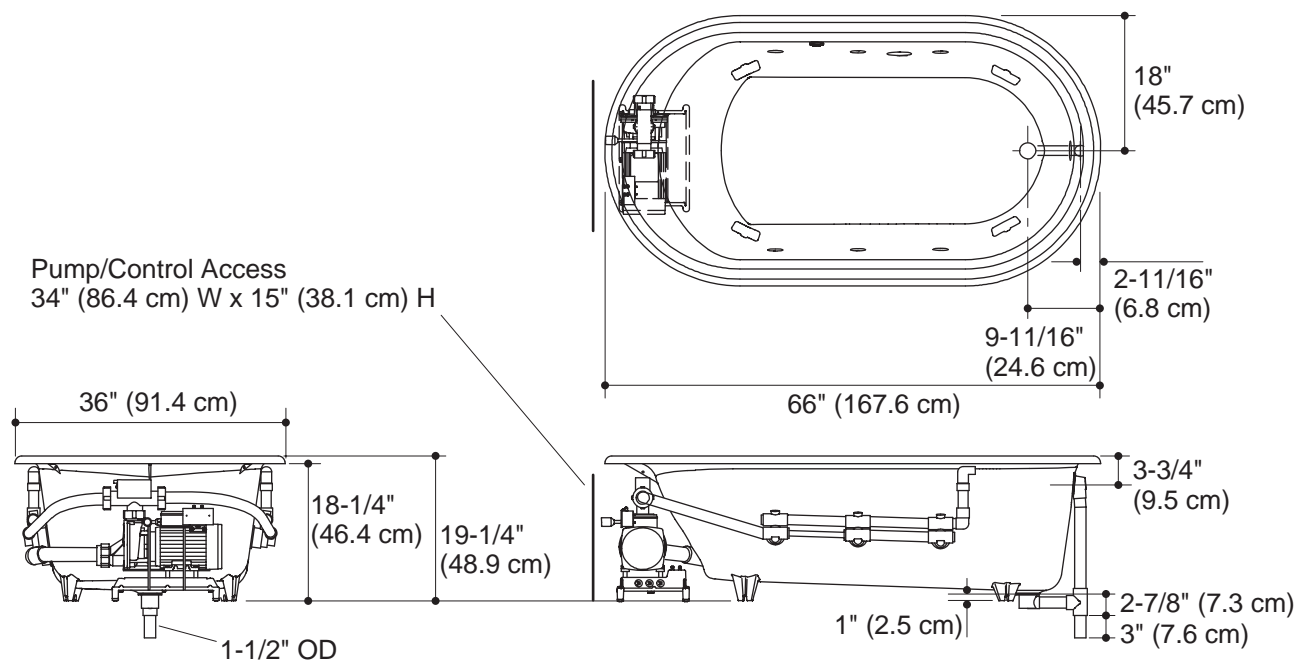

Product Diagram