

ESSEX TM

**Features** 

- Brass construction
- Brass valve bodies
- Quarter-turn washerless ceramic disc valves
- 2.5 gpm (9.5 lpm)
- Lower flow aerator options are available (refer to the Kohler Price Book)
- Wristblade handles
- · Available with or without handspray
- Optional escutcheon plate is available for three-hole installations
- 9-1/4" (23.5 cm) gooseneck swing spout

#### **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/UPC
- NSF 61
- Energy Policy Act of 1992 (EPACT)
- ADA

# KITCHEN SINK FAUCET K-8763 ALSO K-8762

**ADA** 



#### Colors/Finishes

• CP: Polished Chrome

BN: Brushed Nickel

#### **Specified Model**

Model	Description	Colors/Finishes	
K-8763	Kitchen sink faucet with handspray	□ CP	□ BN
K-8762	Kitchen sink faucet less handspray	□ CP	□ BN
Optional Accessories			
K-14511	10-1/2" (26.7 cm) escutcheon plate for three-hole installations	□ CP	□ BN


### **Product Specification**

Two-handle kitchen sink faucet shall be of brass construction. Faucet shall feature brass valve bodies. Faucet shall feature quarter-turn washerless ceramic disc valves, assuring positive handle stop positioning. Faucet shall include 9-1/4" (23.5 cm) gooseneck swing spout and wristblade handles. Faucet shall be available with or without handspray. Faucet shall feature optional escutcheon plate for three-hole installations. Faucet shall be rated at 2.5 gallons (9.5 L) per minute. Faucet shall have lower flow aerator options. Faucet shall be Kohler Model K-

# ESSEX TM

#### **Installation Notes**

Install this product according to the installation guide.

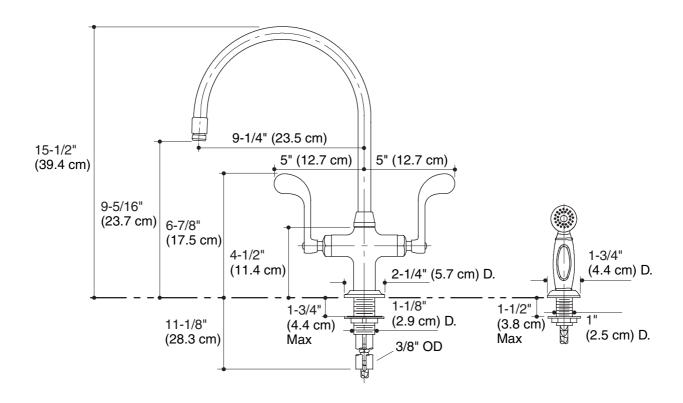

## **Product Diagram**

