

## DESCRIPTION

- Solid brass construction
- Various finishes identified by suffix
- 3/8" compression x 15" stainless steel supply lines

## OPERATION

- Lever style handle
- Temperature controlled by 110° arc of handle travel


## FLOW

- Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi, for products made before October 2008 flow is limited to 2.2 gpm max (8.3 L/min)

## CARTRIDGE


- Ceramic disc cartridge with temperature limit stop
- Nonmetallic/nonferrous and ceramic material

## STANDARDS

- Third party certified to meet WaterSense,® CSA B-125.1, ASME A112.18.1, ICC A117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA**  for lever handles

## WARRANTY


- Warranted for 5 years against material or manufacturing defects

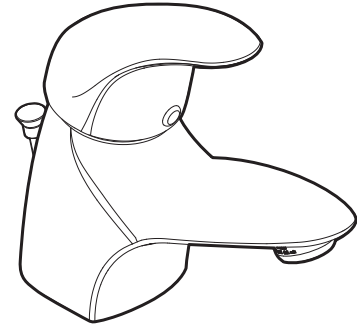

## Single-Handle Lavatory Faucet With Metal Drain Assembly

Models: 8419 series

**NOTE:** DESIGNED TO BE INSTALLED  
THROUGH 1 HOLE 1-3/8" MIN. DIA.

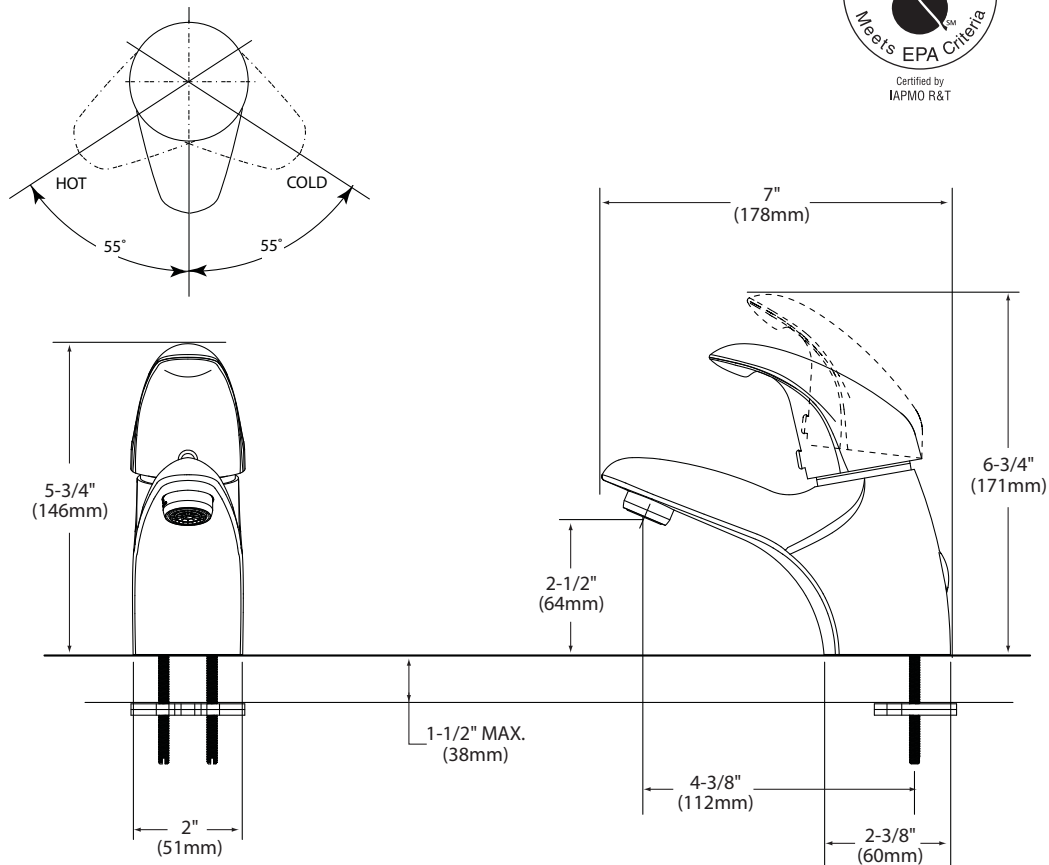

## CRITICAL DIMENSIONS

(DO NOT SCALE)