

FAUCET DESCRIPTION

- Chrome plated solid brass body
- Single mount faucet
- Optional deck plate to accommodate installations with 3 mounting holes, 4" on center (outside holes)

OPERATION

- Adjustable infrared sensor (range, turn off delay and obstruction delay)
- Temperature controlled by mixing valve or mixing tee (optional)
- Battery powered (AC optional)


FLOW

- Supplied with vandal resistant 0.5 gpm (1.9 L/min) aerator (with key)

VALVES


- In-line filter included
- Slow close solenoid valve

STANDARDS

- Third party certified to CSA B-125.1/ASME A112.18.1, and all applicable specifications referenced therein
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA  compliant


WARRANTY

- Warranted for 5 years against material or manufacturer defects

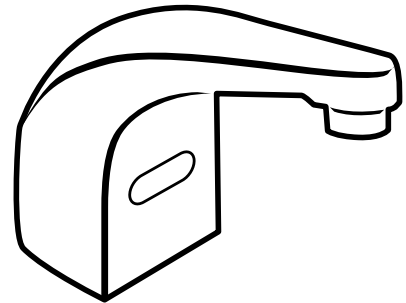

**Single Deck-Mount, Non-Mixing,
Battery Powered Electronic Faucet**

Model: CA8302

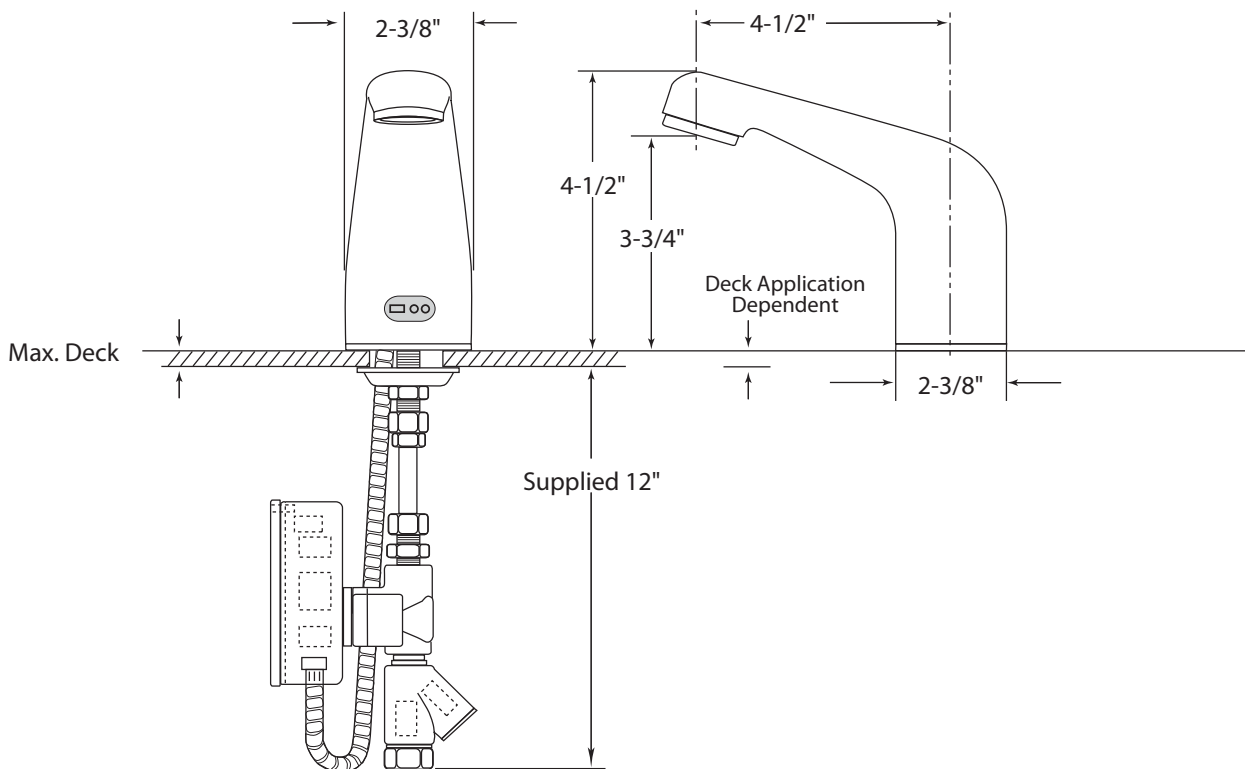

CRITICAL DIMENSIONS

(DO NOT SCALE)