

## FAUCET DESCRIPTION

- Chrome plated metal construction
- 3/8" male compression fittings
- Vandal resistant torx head screws

## OPERATION

- Lever style handles with hot and cold color indicators
- Hot side clockwise (1/4) turn to open (counterclockwise to close)
- Cold side counterclockwise (1/4) turn to open (clockwise to close)


## FLOW

- 2.2 gpm (8.3 L/min) max. aerator

## CARTRIDGE


- Brass shell, ceramic disc construction

## STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B-125.1, NSF 61/9 and all applicable specifications referenced therein
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA**  for lever handles

## WARRANTY


- Warranted for 5 years against material or manufacturing defects

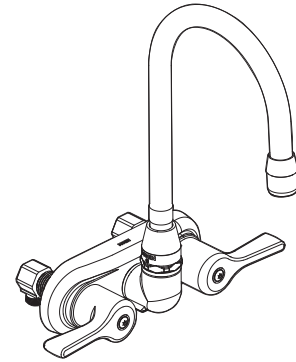

**Two-Handle Wall-Mount Bar Faucet**

**Model: 8281**

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 2 HOLES, 1" MIN. DIA. AND 4" ON CENTER

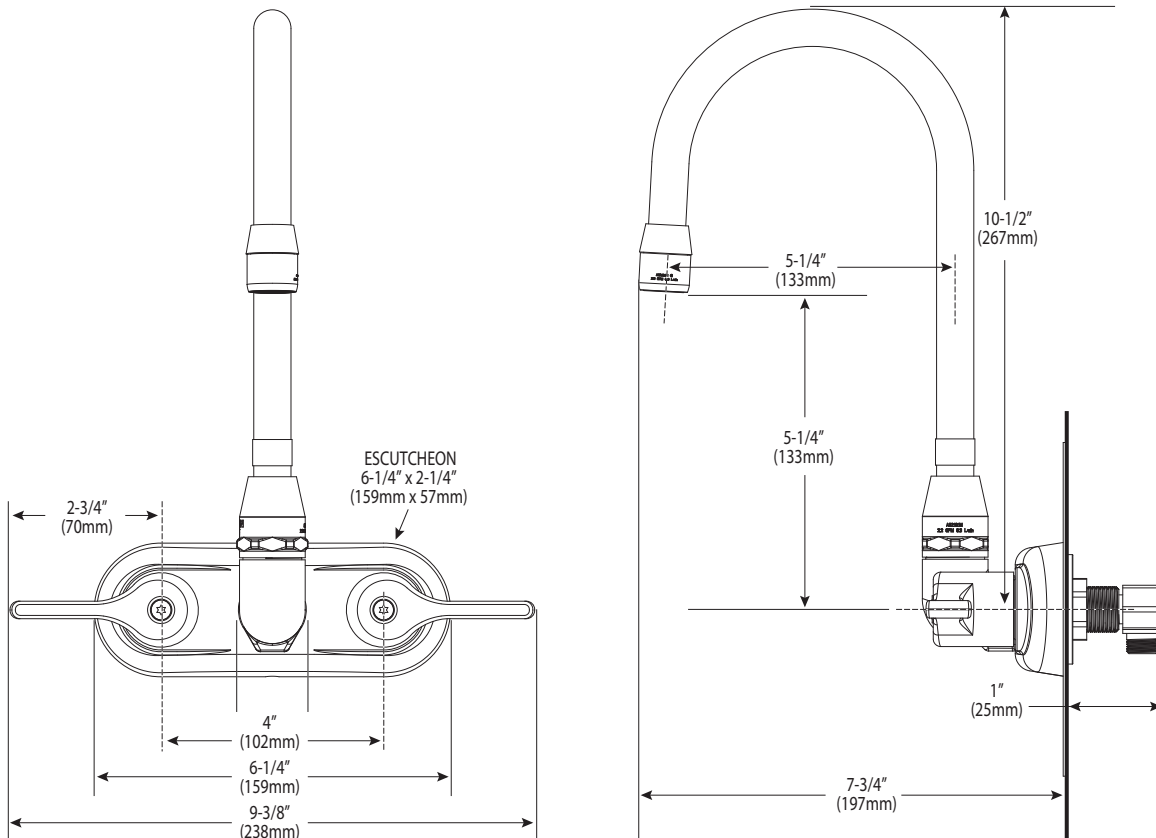

## CRITICAL DIMENSIONS

(DO NOT SCALE)