



Buy it for looks. Buy it for life.®

Specifications

FAUCET DESCRIPTION

- Hydrolock™ quick connect installation
- Flush button with raised stream and spray indicators
- Metal construction with 10 finishes
- Pullout spray with 59" metal hose
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

OPERATION

- Lever style handle
- Temperature controlled by 180° arc of handle travel
- Spout receptor rotation is 145°
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

FLOW

- Flow is limited to 2.2 gpm (8.3 L/min) at 60 psi

CARTRIDGE

- 1225 cartridge design
- Engineered polymers, non-ferrous and stainless steel materials


STANDARDS

- Designed and manufactured to comply with the requirements of: CSA B-125, ASME A112.18.1M, IAPMO PS 49-92, NSF 61 Section 9, California Proposition 65, ANSI A117.1, ADA
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

ADA

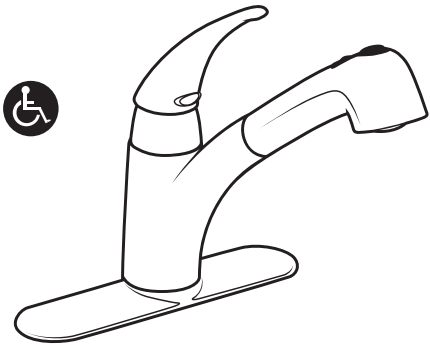


extensa™ Single Control Kitchen Faucet w/Pullout Spray

Models: 7560, 7560C, 7560S, 7560W, 7560V, 7560BL, 7560SL, 7560SLBL

87560W, 87560SL

DISCONTINUED MODELS: 7560CS, 7560CBL, 87560C, 87560S, 87560SLBL, 87560CS, 87560CBL, 87560

NOTE: DESIGNED TO INSTALL THRU 1 OR 3 HOLES 1-1/4" (32mm) MIN. DIA.

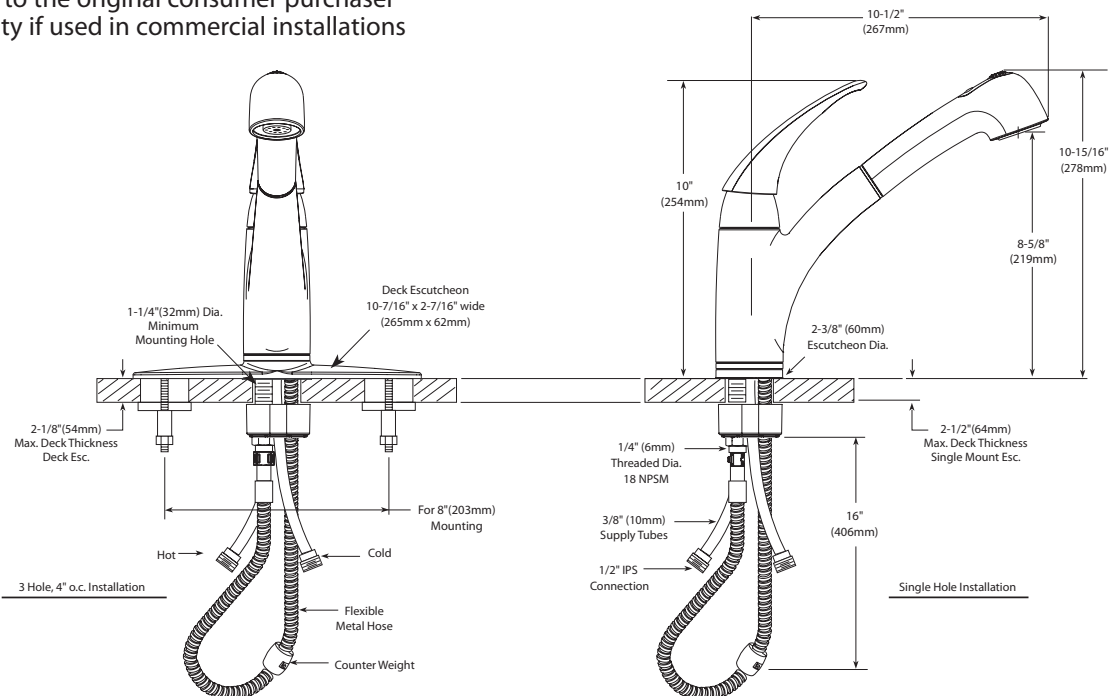

CRITICAL DIMENSIONS

(DO NOT SCALE)