



Buy it for looks. Buy it for life.®

Specifications

FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- Hydrolock™ quick connect installation
- Pullout spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings connect directly to supply stop

OPERATION

- Lever style handle
- Temperature controlled by 120° arc of handle travel
- Operates with less than 5lbs. of force
- Operates in stream or spray mode in the pullout or retracted position
- High arc spout provides height and reach to fill or clean large pots, while the pull-down wand provides the maneuverability for cleaning and rinsing
- When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

FLOW

- Aerator is limited to 1.5 gpm (5.7 L/min) max.

CARTRIDGE

- Ceramic cartridge design
- Non-metallic, non-ferrous and ceramic materials

STANDARDS


- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- Third party certified to IAPMO Green ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9
- Meets CalGreen and Georgia SB370 requirements

- **ADA**  for lever handle

- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

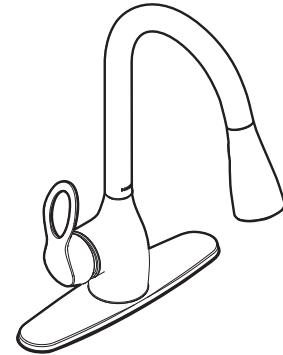

Single Control Kitchen Faucet

Model: CA87011 series

NOTE: DESIGNED TO INSTALL THRU 1 OR 3 HOLES 1-1/4" (32mm) MIN. DIA.

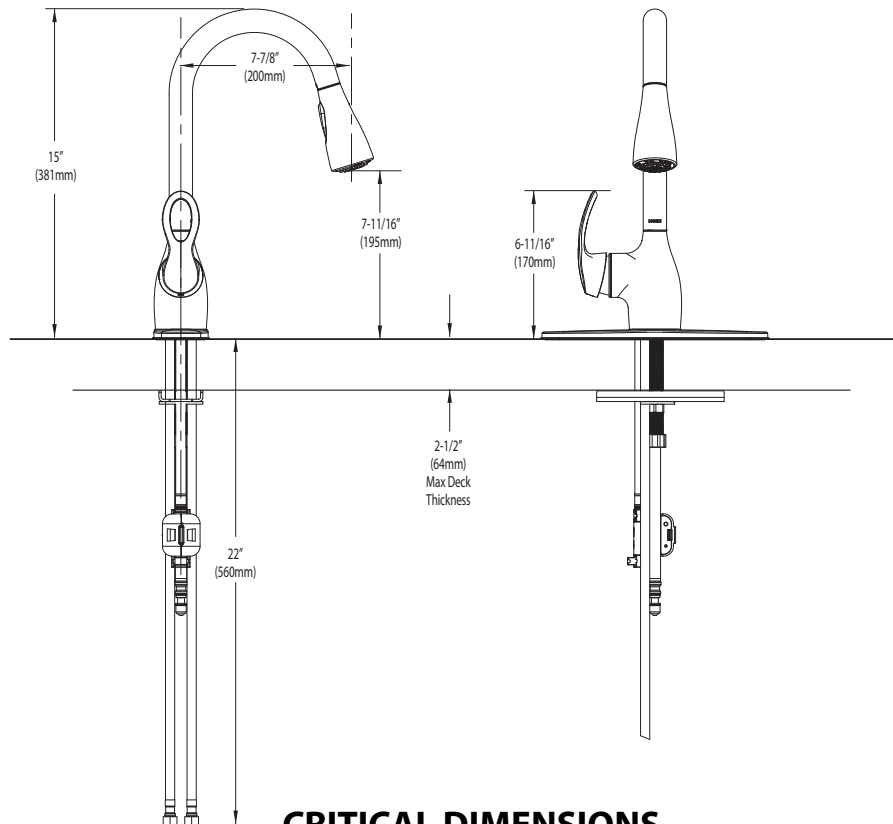

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com